

ROLINE Industrial Gigabit PoE++ Mid-Span Injector, 90W

21.13.1202

Installation Guide

The information contained in this document is subject to change without prior notice.

Copyright (C) All Rights Reserved.

Table of Contents

1. Introduction.....	3
1.1 Features.....	3
1.2 Product Panels.....	4
1.3 LED Indicators.....	4
1.4 Specifications.....	5
2. Installation.....	8
2.1 Safety Cautions.....	8
2.2 Mounting the Device to a Wall.....	9
2.3 Mounting the Device to a DIN-Rail.....	9
2.3 Mounting the Device on a Panel.....	11
2.4 Applying DC Power.....	13
2.4.1 Power Loss.....	15
3. Making LAN Connections.....	16
3.1 Data In Jack.....	16
3.2 PoE OUT Jack.....	16
3.3 Connection Distance.....	17
3.4 LED Indication.....	18

1. Introduction



Power over Ethernet provides a way for Ethernet network devices to be powered by UTP cables, including Cat.5, 5e, and 6 rather than by separate power cords. The device is a mid-span injector that can deliver output power supporting proprietary PoE++ 90W Type 4 PDs, 802.3at Type 2 high-power PDs, and 802.3af Type 1 PDs. The injector supports both Fast Ethernet connection and Gigabit Ethernet connection.


To avoid damage of the connected devices, it is enhanced with smart design to discover compliant PD. It shuts down the power immediately when incompliance is discovered. For safety, other protections for conditions such as disconnection, overload, over-current, and short circuit are also provided to secure your network installation. It is an ideal mid-span that supplies reliable, uninterrupted power up to 90W to IP phones, 802.11 access points, pan-tilt-zoom cameras, and other Ethernet devices using existing LAN cable infrastructure.

1.1 Features

- Supports both Fast Ethernet and Gigabit Ethernet
- Backward compatible with 802.3af and 802.3at-compliant PDs
- Delivers power output to support 90W PD
- Type 1 ~ Type 4 compliant PD discovery & classification
- Power shutdown protection for incompliant PD
- Power shutdown protection for disconnection
- Power shutdown protection for overload, over-current, and short circuit
- Multiple built-in power connectors to support a variety of external power supply
- Plug and play with no configuration required
- Supports DIN-rail and panel mounting

1.2 Product Panels

The following figure illustrates the components of the device:

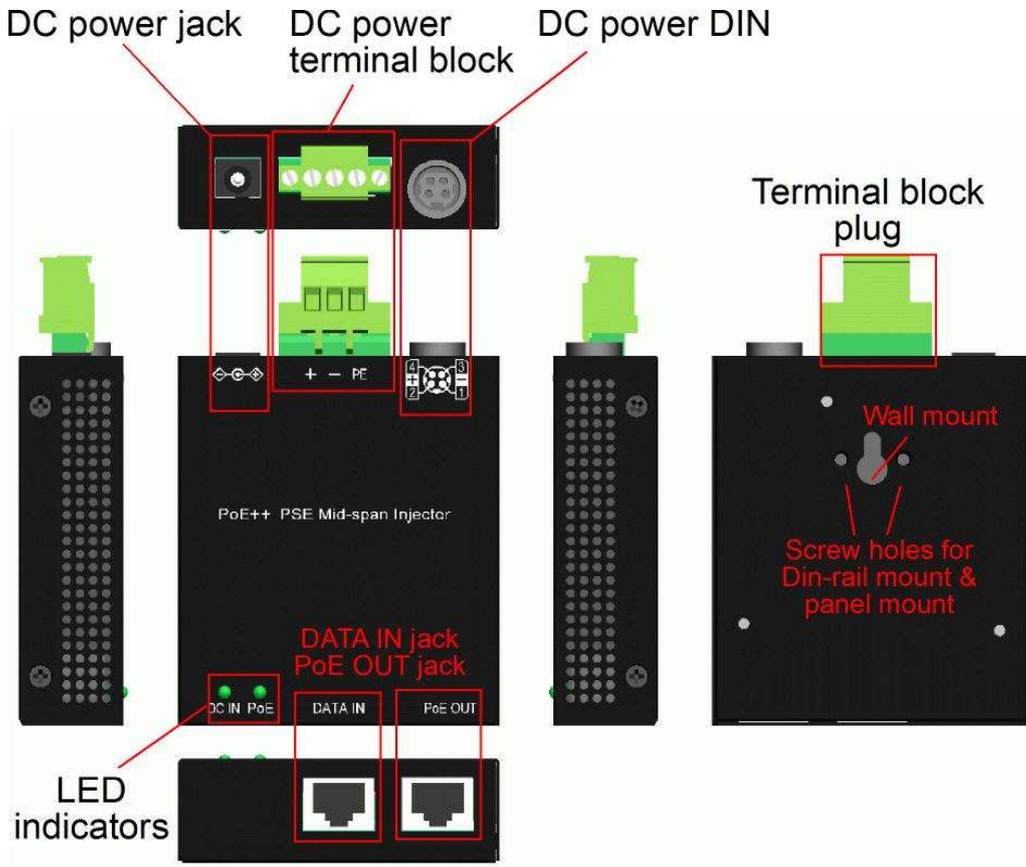

1.3 LED Indicators

<u>LED</u>	<u>Function</u>
DC IN	DC power input status
PoE	PoE output power status

1.4 Specifications

DATA IN Jack

Connector	Shielded RJ-45 jack
Connection support	IEEE 802.3 10Base-T, IEEE 802.3u 100Base-TX, IEEE 802.3ab 1000Base-T
Network cable	Cat.5, 5e, 6 UTP or better
Pin assignments	10/100Base-TX & 1000Base-T connections

Pin	10/100Base-TX	1000Base-T
1	RX+	BI_DA+
2	RX-	BI_DA-
3	TX+	BI_DB+
4		BI_DC+
5		BI_DC-
6	TX-	BI_DB-
7		BI_DD+
8		BI_DD-

PoE OUT Jack

Connector	Shielded RJ-45 jack
Connection support	IEEE 802.3 10Base-T, IEEE 802.3u 100Base-TX, IEEE 802.3ab 1000Base-T
Network cable	4-pair Cat.5, 5e, 6 UTP or better (not bundled)
PoE	PSE output, mid-span up to 100 meters
Pin assignments	V _{poe} : PoE power

Pin	10/100Base-TX	1000Base-T	PoE
1	RX+	BI_DA+	V _{poe+}
2	RX-	BI_DA-	V _{poe+}
3	TX+	BI_DB+	V _{poe-}
4		BI_DC+	V _{poe+}
5		BI_DC-	V _{poe+}
6	TX-	BI_DB-	V _{poe-}
7		BI_DD+	V _{poe-}
8		BI_DD-	V _{poe-}

DC Power Terminal Block

Connector Flange terminal block 3P

Contacts DC Isolated to chassis ground

Pin	Marking	Remark
1	DC+	DC power input (+)
2	DC-	DC power input (-)
3	PE	Protective earth (Connected to chassis ground inside)

DC Power Jack

Connector DC Jack (-Ø6.3mm/+Ø2.0mm) for external AC-DC power adapter

Contacts Isolated to frame ground

Contact	Marking	Remark
Center (Ø2.0mm)	<+>	DC power input (+)
Outer (Ø6.3mm)	<->	DC power input (-)

DC Power DIN

Connector Female power DIN for external AC-DC power adapter

Contacts Isolated to frame ground

Pins	Marking	Remark
2, 4	DC+	DC power input (+)
1, 3	DC-	DC power input (-)

DC Power

Working Voltage +55 ~ +57VDC for 45W+ high-power connection
+51 ~ +57VDC for 30W+ high-power connection
+45 ~ +57VDC for general connection

Power Over Ethernet

PoE PSE type Mid-span injector

Standard IEEE 802.3af, IEEE 802.3at, and proprietary PoE++

PSE power pins Pin 1/2/4/5: V_{poc+} , Pin 3/6/7/8: V_{poc-} (V_{poc} : DC power input)

Power delivery 132W max. at port output (Depending on DC power voltage)

Protection PoE output shutdown

Protection events Incompliant PD detection, PD disconnection

Overload, Over-current, Short-circuit, Under voltage

PoE PD classes support PSE output vs. PD input

Type	Class	DC power min. *2	PSE output	PD input min. *3
1	0	45V	15.4W	12.95W
1	1	45V	4W	3.84W
1	2	45V	7W	6.49W
1	3	45V	15.4W	12.95W
2	4	51V	32W	25.5W
3*1	5	55V	50W	38.7W
3*1	6	55V	74W	52.7W
4*1	7	55V	90W	70W
4*1	8	55V	128W	90W

*1: The associated classes are proprietary std.

*2: The minimum DC power voltage to support the specified PSE output

*3: The minimum power received at the PD end in worst case

Mechanical

Dimension (base) 73 x 85 x 24 mm (Case WxDxH)
 Housing Enclosed metal with no fan
 Mounting Din-rail mounting, Panel mounting (with optional bracket)

Environmental

Operating Temperature Typical -40°C ~ +70°C (Main device)
 Storage Temperature -40°C ~ +85°C
 Relative Humidity 5% ~ 95% non-condensing

2. Installation


2.1 Safety Cautions

To reduce the risk of bodily injury, electrical shock, fire and damage to the product, observe the following precautions:

	Do not service any product except as explained in your system documentation.	
	Opening or removing covers may expose you to electrical shock.	
	Only a trained service technician should service components inside these compartments.	
	<p>If any of the following conditions occur, unplug the product from the electrical outlet and replace the part or contact your trained service provider:</p> <ul style="list-style-type: none"> - The power cable, extension cable, or plug is damaged. - An object has fallen into the product. - The product has been exposed to water. - The product has been dropped or damaged. - The product does not operate correctly when you follow the operating instructions. 	
	Do not push any objects into the openings of your system. Doing so can cause fire or electric shock by shorting out interior components.	
	Operate the product only from the type of external power source indicated on the electrical ratings label. If you are not sure of the type of power source required, consult your service provider or local power company.	
	 Tamb=70°C	<p>Since the product is a high temperature device, install and operate the product only by authorized personnel only. Install the product at a restricted area where unauthorized persons can not reach.</p>

2.2 Mounting the Device to a Wall

The back panel of the device is featured a wall mount hole as follows:

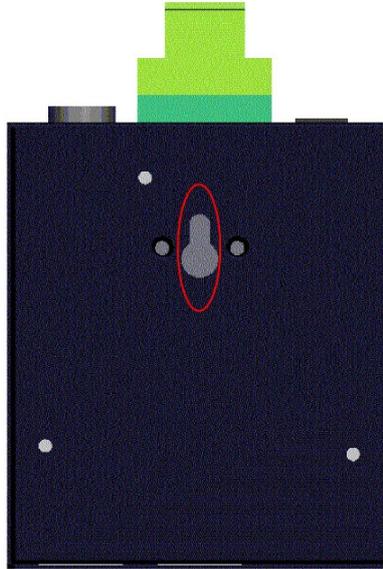


2.3 Mounting the Device to a DIN-Rail

In the product package, a DIN-rail bracket is provided or has been installed for mounting the device in a industrial DIN-rail enclosure.




The steps to mount the device onto a DIN rail are:


1. Install the mounting bracket onto the back of the device with screws as shown below:

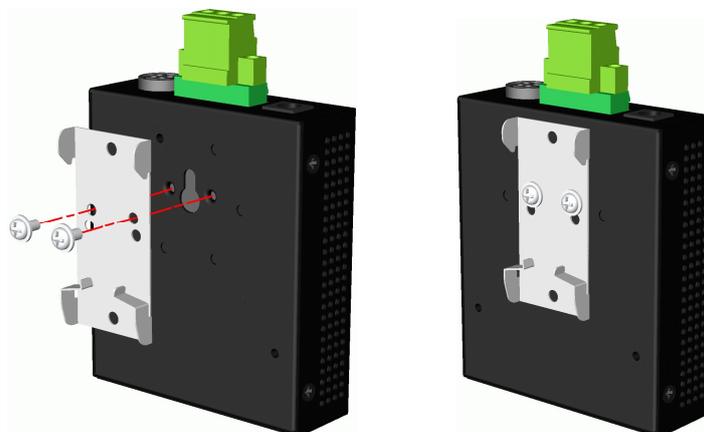

2. Attach bracket to the lower edge of the DIN rail and push the unit upward a little bit until the bracket can clamp on the upper edge of the DIN rail.
3. Clamp the unit to the DIN rail and make sure it is mounted securely.

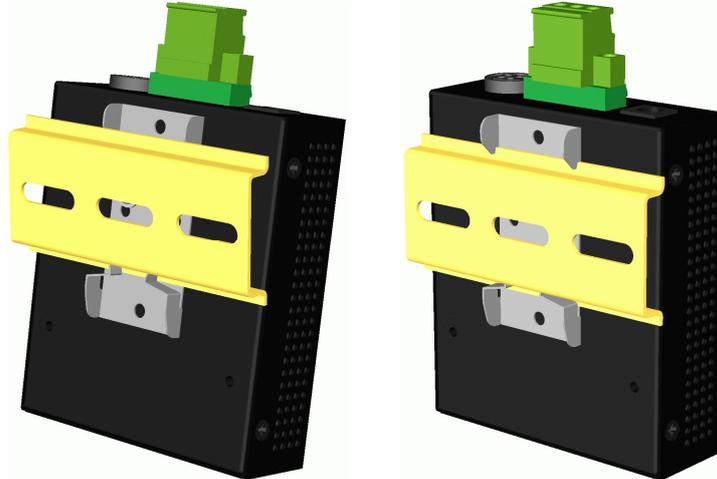

The final dimension is:

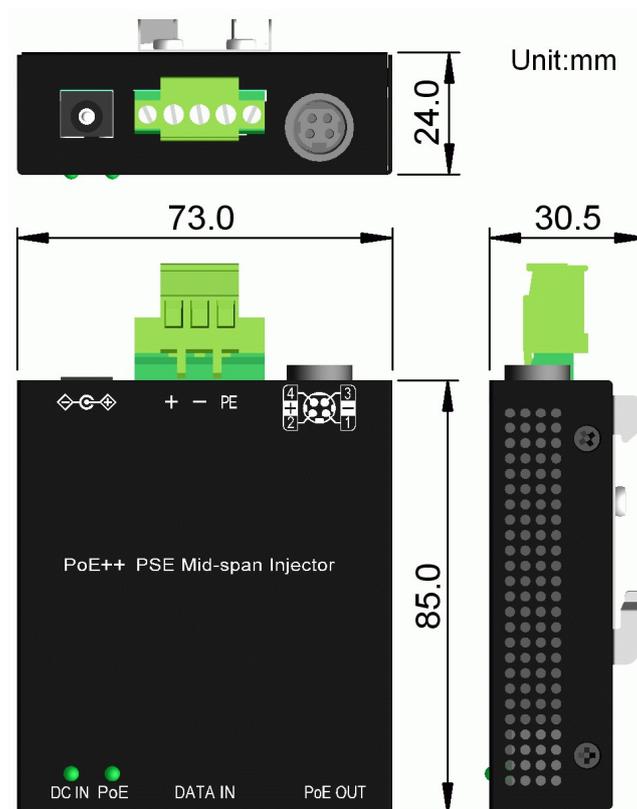


2.3 Mounting the Device on a Panel

The device may be provided optionally with a panel mounting bracket. The bracket supports mounting the device on a plane surface securely. The mounting steps are:


1. Install the mounting bracket on the device.




2. Screw the bracket on the device.

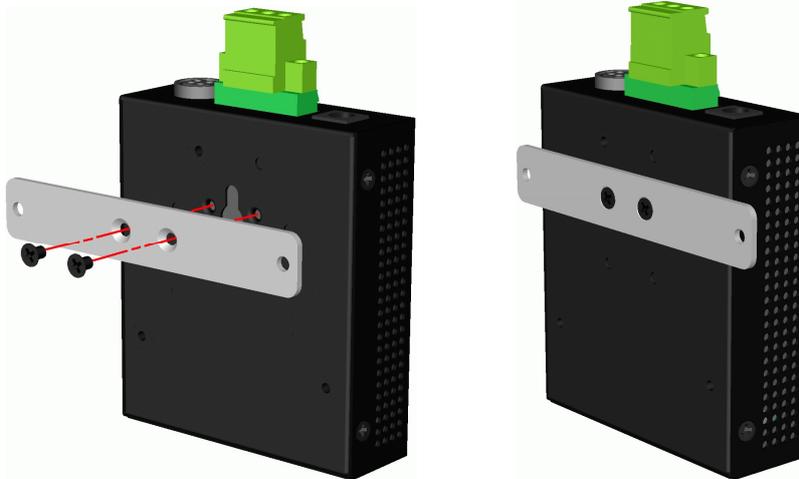

3. Screw the device on a panel and the locations for screws are shown below:

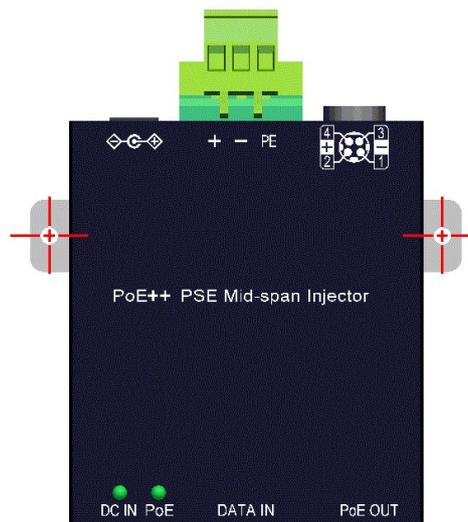


The final dimension is:

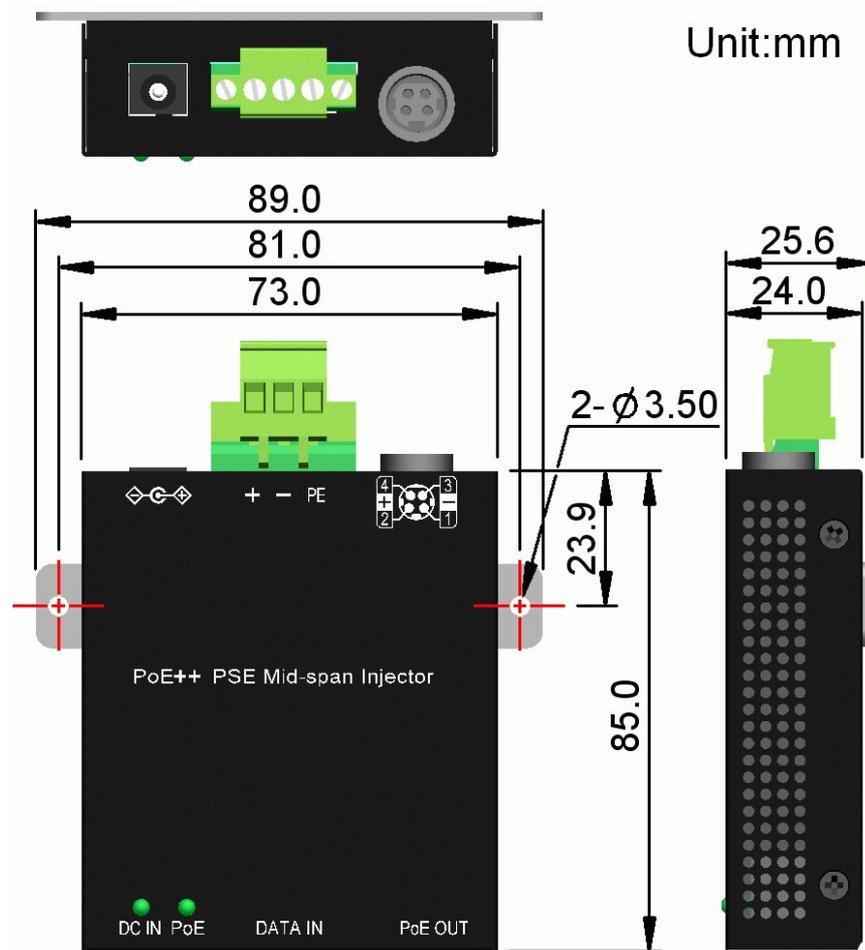

2.4 Applying DC Power

DC Power Connectors

The device is featured with three different DC power input connectors for supporting different types of external AC-DC power supply or AC-DC power adapters.

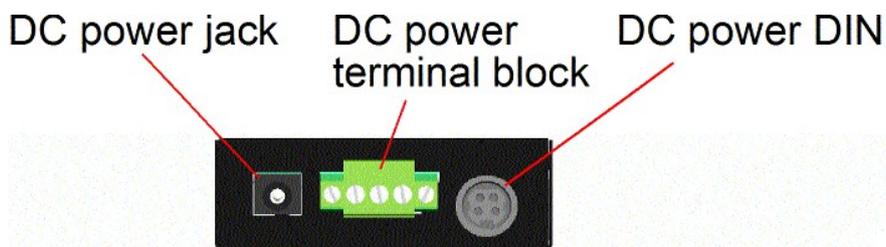

Connector	Marking	Power Supply
Terminal Block		General DC power supply with terminal contacts
DC Jack		AC-DC power adapters with DC plug
Female Power DIN		AC-DC power adapters with male power DIN

Selecting Voltage

Type	PD Class	DC power Working voltages	DC power Min. (*1)	PSE output Max.	PD input Min. (*2)
1	0	+45 ~ 57V	45V	15.4W	12.95W
1	1	+45 ~ 57V	45V	4W	3.84W
1	2	+45 ~ 57V	45V	7W	6.49W
1	3	+45 ~ 57V	45V	15.4W	12.95W
2	4	+45 ~ 57V	51V	32W	25.5W
3	5	+45 ~ 57V	55V	50W	38.7W
3	6	+45 ~ 57V	55V	74W	52.7W
4	7	+45 ~ 57V	55V	90W	70W
4	8	+45 ~ 57V	55V	128W	90W

*1: The minimum voltage to support the specified maximum PSE output.

*2: The minimum power received at the PD end in worst case with the specified maximum PSE output.


DC power input vs. PoE power output

Type	PD Class	Working V_{dc_in}	I_{poe} max.
1	0	+45 ~ 57V	0.375A
1	1	+45 ~ 57V	0.112A
1	2	+45 ~ 57V	0.208A
1	3	+45 ~ 57V	0.375A
2	4	+45 ~ 57V	0.636A
3	5	+45 ~ 57V	0.919A
3	6	+45 ~ 57V	1.35A
4	7	+45 ~ 57V	1.65A
4	8	+45 ~ 57V	2.32A

- PoE output voltage is about equal to DC IN voltage with a small voltage drop of 0.2V typically.
- PoE output current maximum can be treated as a threshold of over-current event.
- PSE output power max. \approx PoE output voltage x output current max.
- The PoE voltage measured at the PD end may be in the range of 36 ~ 57VDC.

Terminal Plug & Power Wire

A 3P flange terminal plug is provided together with the device as shown below:

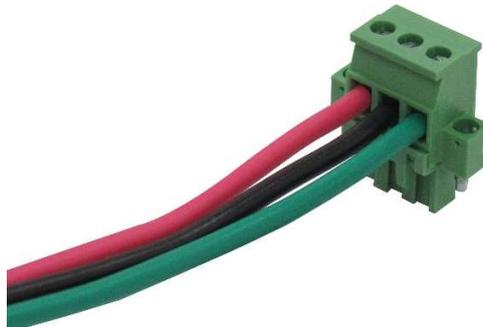

Power wires: 24 ~ 12AWG (IEC 0.5~2.5mm²)

Wire length: 1 meter max.

Pin	Marking	Power wire color	Remark
1	DC+	Red	DC power input (+), isolated to chassis ground in circuitry
2	DC-	Black	DC power input (-), isolated to chassis ground in circuitry
3	PE	Green	Protective earth, connected to chassis ground inside, applied if needed.

*Contacts, DC+ and DC- are isolated with PE contact.

2.4.1 Power Loss

The power voltage received at the PD end over Cat.5 is different from the voltage supplied at the device's DC power connector. The voltage drop is caused by the resistance inside the device and the Cat.5 LAN cable line resistance before the power arrives PD end. The voltage drop means power loss in the path of power delivery.

Here is some information for reference.

Device resistance	1 Ω
-------------------	------------

Voltage drop over standard Cat.5 (Wire: 24AWG, Length: 100m)

Current	Cable pair	Voltage drop
2A	4	2V
2A	2	8.3V
1A	4	1V
1A	2	4.1V

Note:

1. The device (PSE) delivers the power over 4 pairs for all PD classes.
2. However, some PDs might use 2 pairs only in receiving PoE power. Refer to each PD's documents for details.

3. Making LAN Connections

3.1 Data in Jack

The RJ-45 jack is used to connect a PoE-incapable Ethernet device that communicates with the remote powered device. The injector operates transparently to Ethernet port functions like auto MDI/MDI-X function and Auto-negotiation function. The network signal is forwarded to PoE OUT jack.

It supports:

Ethernet interfaces

10BASE-T, 100BASE-TX, 1000BASE-T

Network Cables

10BASE-T: 2-pair UTP Cat. 3, 4, 5 , EIA/TIA-568B 100-ohm

100BASE-TX: 2-pair UTP Cat. 5, EIA/TIA-568B 100-ohm

1000BASE-T: 4-pair UTP Cat. 5 or higher (Cat.5e is recommended), EIA/TIA-568B 100-ohm

3.2 PoE OUT Jack

The RJ-45 is enabled to deliver power together with network signal to a connected powered device via Ethernet cable. To make an IEEE standard PoE connection, the connected PoE PD must be IEEE 802.3at or IEEE 802.3af-compliant device for safety reason. For proprietary PoE++ PD classes, only the PDs in certified list are supported the injector.

Network cable for PD connection

4-pair Cat.5, 5e, 6 or better

No bundled cable for proprietary PoE++ classes

No 2-pair cable

Safety Features


The injector is equipped with the following capabilities for a safe and reliable connection:

1. Detection for an IEEE 802.3af /802.3at/Proprietary PoE++ compliant PD.
2. No power is supplied to a device which is classified incompliant PD.
3. No power is supplied when no connection exists on the port.
4. The power is cut off immediately from powering condition when a disconnection occurs.
5. The power is cut off immediately from powering condition when overload occurs.
6. The power is cut off immediately from powering condition when over-current occurs.
7. The power is cut off immediately from powering condition when short circuit condition occurs.

3.3 Connection Distance

Connecting standard PD


The following figure illustrates a typical application of the device connecting to a standard PD.

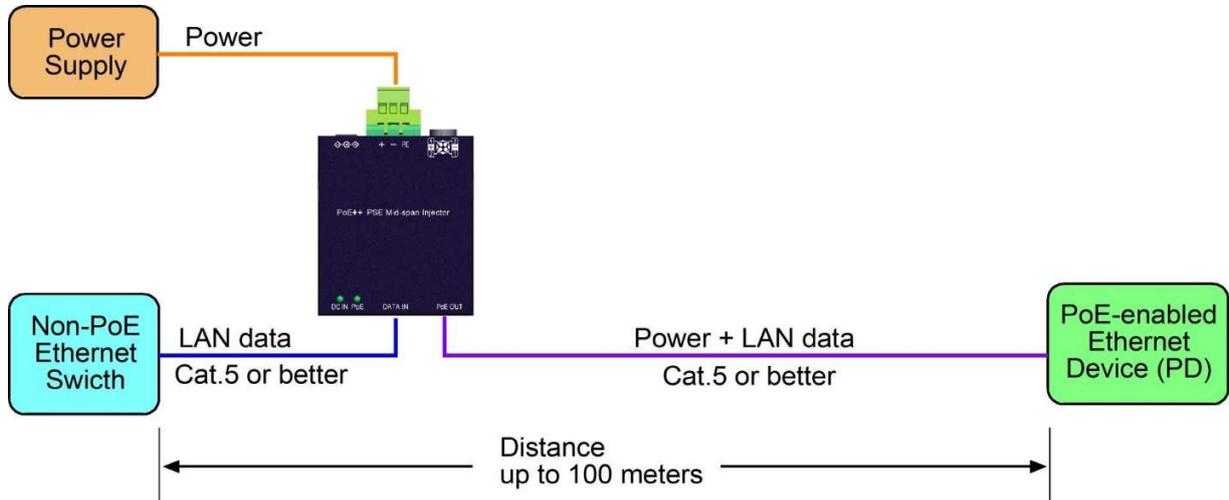

The cable distance including the segment from the injector to the Ethernet device and the segment to PD is no more than 100 meters.

Connecting PoE splitter

The figure below illustrates another example that the device connects to a PoE splitter for a non-PoE device. A PoE splitter operates as a PD that splits PoE input to pure power line and separated LAN interface.

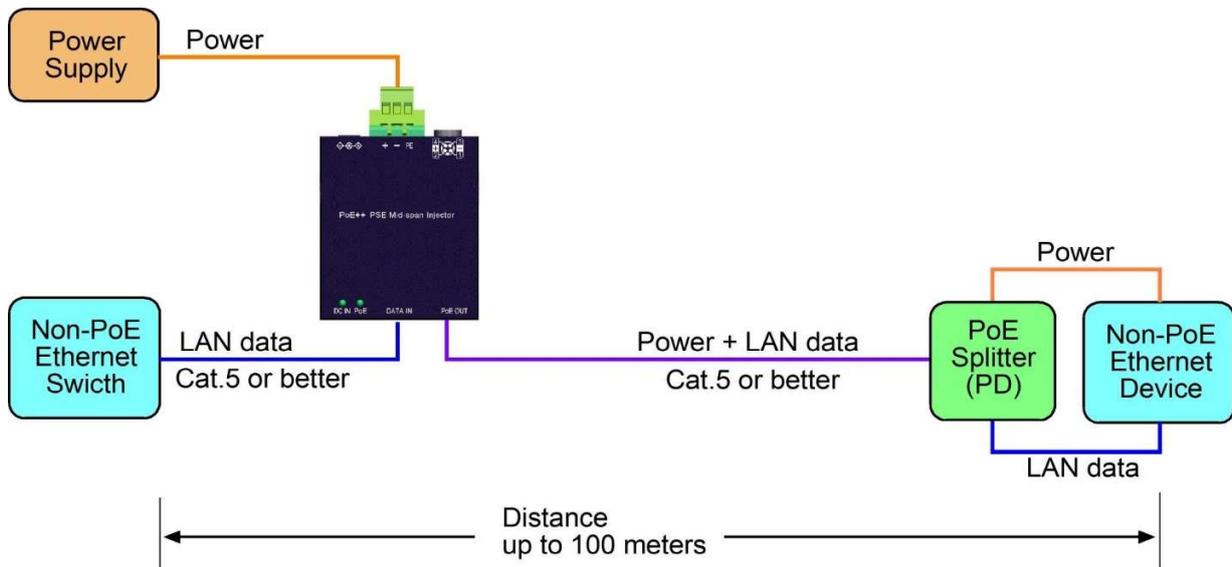

3.4 LED Indication

LED	State	Interpretation
DC IN	OFF	No power is supplied on DC power input.
	ON	DC power is supplied.
PoE	OFF	PoE output is shutdown.
	ON	PoE power is delivered.