


Pin Assignment

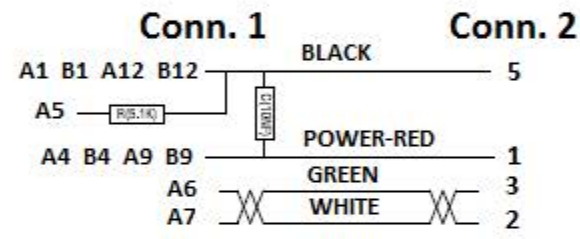

- Electrical Test:**
- 100% Test Open, Short, Miss-Wire
 - Contact Resistance: 3Ω Max.
 - Insulation Resistance: 5Ω Min.
 - Hi-Pot: 300V DC/10MS.

NUMBER	PRODUCT SPECIFICATIONS	Quantity	Unit
4	45P PVC Black		G
3	USB 2.0 Micro B5P Male Reversible (Black Insulator, Nickel Plated)	1	PCS
2	USB 2.0 Type C Male (Black Insulator, Nickel Plated)	1	PCS
1	UL 2725 #28*1P+#20*2C+AL, OD: 4.2mm, Black PCV Jacket	1	PCS

ROLINE USB 2.0 Cable, Type C - Micro B Reversible, M/M, 1.8m, black			
Item	11.02.8780		
Draw	<i>Kobe</i>	Date:	2017.12.20
Approval			
Duty	F16		
Sample NO.		Drawings of 1 (1)	Proportion: 1:1
		Unit(mm)	⊕

