



Datenblatt - Fiche technique - Data sheet

11.03.1556




ROLINE Internes HDD-Kabel SATA 3.0 Gbit/s, gewinkelt, 0,5m

ROLINE Câble SATA 3.0 Gbit/s pour disques durs, coudé, 0,5 m





ROLINE Internal SATA 3.0 Gbit/s Cable, angled, 0.5 m

ROHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE
Δ*4	C	ECR #070330-3 ADD ROHS SPEC.PACKING.COMM	04/03/07
Δ*2	D	ECR #090224-2 EDIT PACKING.ADD BAR CODE NO.	02/24/09



P2

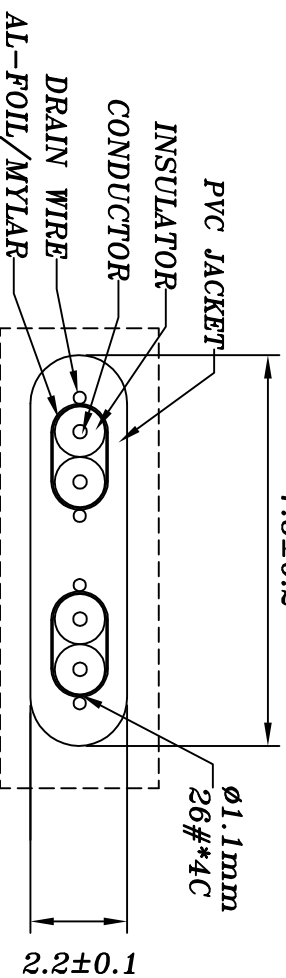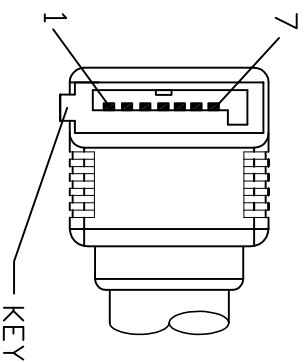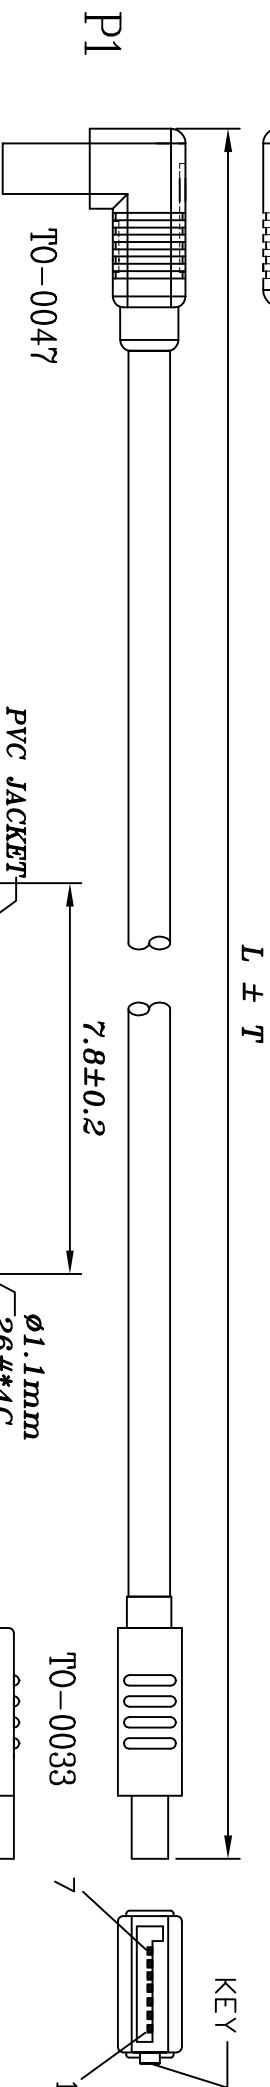

T0-0033



NOTE:

- CABLE:**
UL2725 80°C 30V [26AWG(1/0.404 T.C)*2F + AL/MY+DRAIN WIRE(1/0.32 T.C)*2]
INS: FOAM-PE OD: $\phi 1.1 \pm 0.05$ mm
PVC JACKET OD: $\phi(2.2 \pm 0.1) * (7.8 \pm 0.2)$ mm COLOR: RED (PANTONE 200C)
IMPEDANCE: 100±5 OHM
CONNECTOR: 2-1 MATERIAL:
HOUSING: HIGH TEMPERATURE POLYESTER & GLASS FIBER UL 94V-0
TERMINAL: COPPER ALLOY, CRIMP TYPE
2-1 PLATING: CONTACT AREA: G/F
- HOOD: MOULDED TYPE, PVC 45P, COLOR: BLACK(NK-K01)**
- CABLE ASSY ELECTRICAL TEST:** 4-1 100% OPEN SHORT & MIS WIRE TEST
4-2 CONTACT RESISTANCE 2 OHM MAX
4-3 INSULATION RESISTANCE 20M OHM MIN
- PACKING:** EACH PC / POLYBAG + HEADER CARD + P/N LABEL
Δ Δ 100 PCS / INNER CARTON, 2 INNER CARTON / MASTER CARTON

DWG	P/N	L (mm)	T (mm)	INNER CTN (mm)	MASTER CTN (mm)	BAR CODE NO.
140-1099-2	11.03.1561	1000	20	360*310*150	380*330*340	7611990160518
140-1099-1	11.03.1556	500	20	360*310*100	380*330*240	7611990160501

Tolerance	Inch	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

Title		Customer P/N	
SERIAL ATA SIGNAL CABLE		Customer P/N	
Check	App'd	Customer T-RAG	
Eng'r	Scale NONE	Units	Thrd Projection
Dwg No. 140-1099	REV: E	Sheet 1/1	

Rotronic Co., Ltd.