



Datenblatt - Fiche technique - Data sheet



**21.15.2598**



ROLINE Patchkabel Kat.6 UTP, Component Level, LSOH, pink, 15,0 m

Cordon ROLINE UTP Cat.6, LSOH, Component Level, pink, 15,0 m

ROLINE UTP Cable Cat.6 Component Level, LSOH, pink, 15.0 m

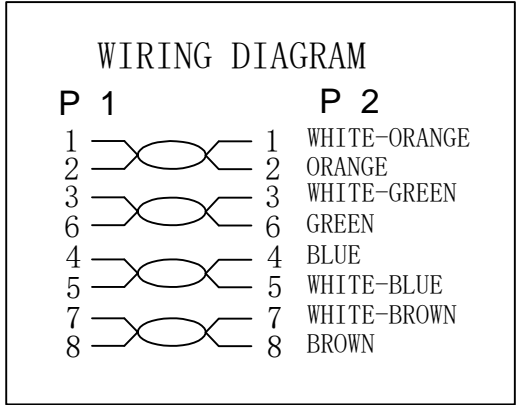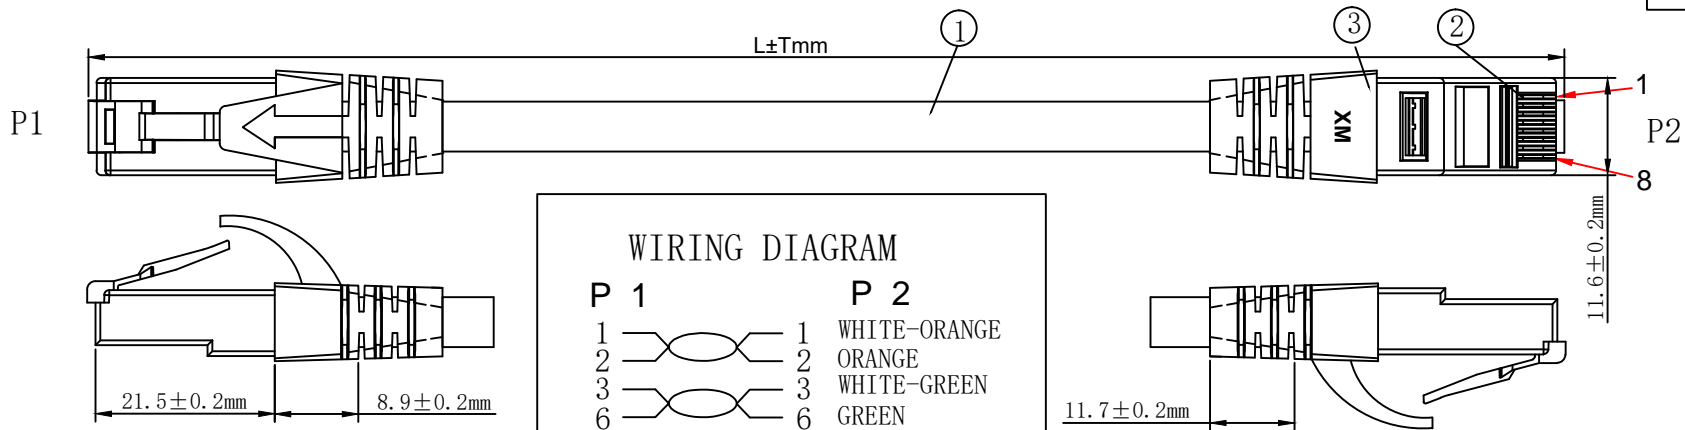

**1. ELECTRICAL TEST:**

- (1). 100% OPEN SHORT & MISS WIRE TEST;
- (2). INSULATION RESISTANCE:DC 250V 20M OHM MIN;
- (3). CONTACTOR RESISTANCE:30 OHM MAX

2. PRINTING:GHMT® roline CAT.6 U/UTP COMPONENT PATCH CORD LSZH 250MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2

3. 100% Component Patch cord Test PASS

4. Minimum bending radius:50mm

**MATERIAL LIST**

⑥	LABEL	NO DRY GLUE LABEL	1PCS	
⑤	MINI TIE	PE MINI TIE (POSSESS METAL)	2PCS	
④	POLYETHYLENE BAG	POLYETHYLENE BAG	1PCS	
③	OVER MOLD	88A PVC Pink	2PCS	
②	CONNECTOR	RJ45 8P8C' S UNSHIELDED PIN GOLD PLATED 3u", Transparent RED	2PCS	
①	CABLE	U/UTP CAT.6 24AWG (BC*1P)*4+CROSS + JACKET LSOH OD=6.0±0.2MM	1PCS	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

COLOUR:Pink (PANTONE:212C)

ITEM NO.	LENGTH (L)	TOLERANCE (T)
21. 15. 2949	300mm	±10mm
21. 15. 2590	500mm	±15mm
21. 15. 2591	1000mm	±30mm
21. 15. 2594	1500mm	±45mm
21. 15. 2592	2000mm	±60mm
21. 15. 2593	3000mm	±90mm
21. 15. 2595	5000mm	±150mm
21. 15. 2596	7500mm	±210mm
21. 15. 2597	10000mm	±300mm
21. 15. 2598	15000mm	±450mm
21. 15. 2599	20000mm	±600mm

ITEM NO.	21. 15. 2949	21. 15. 2590	21. 15. 2591	21. 15. 2592	21. 15. 2593
21. 15. 2594	21. 15. 2595	21. 15. 2596	21. 15. 2597	21. 15. 2598	21. 15. 2599
DESC.	ROLINE UTP PatchCord CAT. 6, LSOH, Comp. Level, Pink				

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

2016-10-20 A

**SECOMP**