



Datenblatt - Fiche technique - Data sheet


21.15.9950



ROLINE LWL-Kabel 50/125 μ m LC/ST, grau, 0,5m

ROLINE Câble patch FO 50/125 μ m LC/ST, gris, 0,5m

ROLINE Fibre Optic Jumper Cable 50/125 μ m LC/ST, grey, 0.5 m

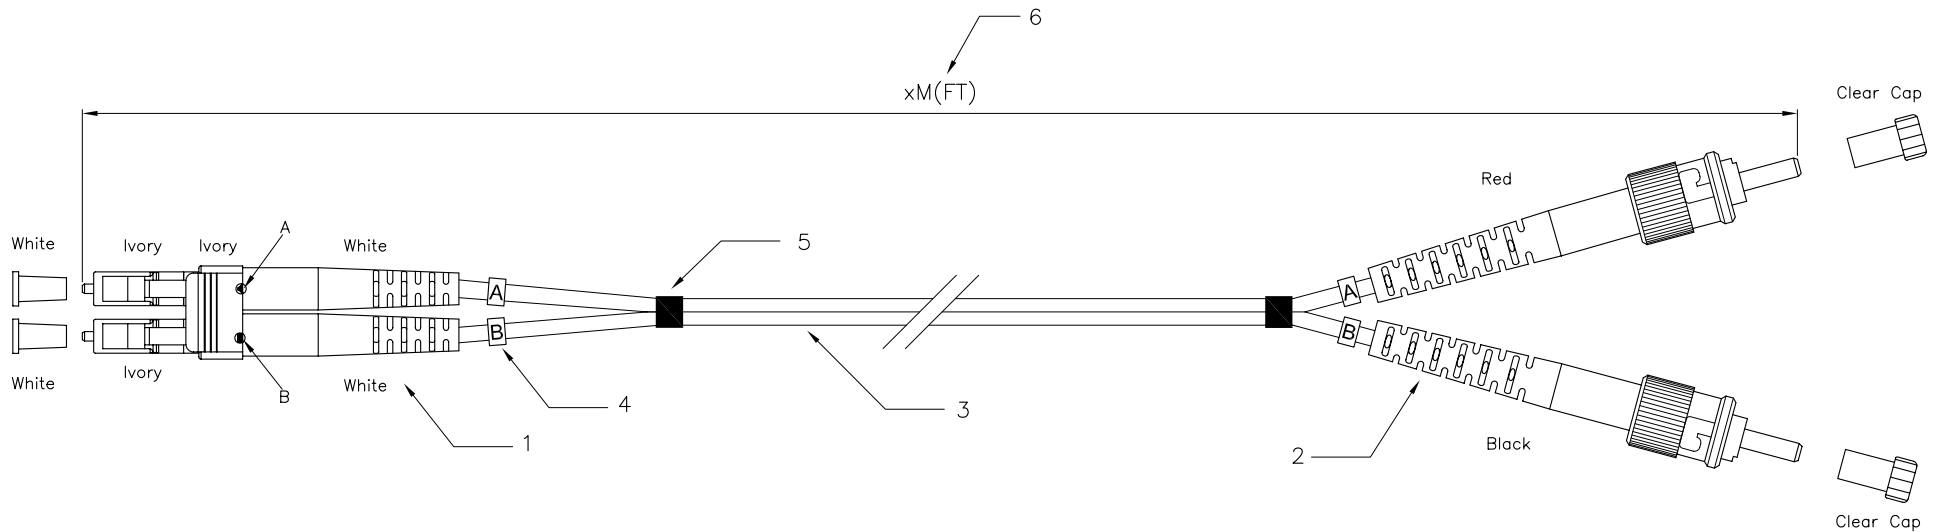

Specification:

1. Connector Type : LC Multimode
2. Connector Type : ST Multimode
3. Cable Type :
 - 3-1. Zipcord Cable, $\phi 3.0\text{mm}$, 50/125um Multimode.
 - 3-2. Cable Jacket : Gray Color, PVC Material.
4. Cable Marker
5. Shrink Tube
6. Length : xM(FT)

Performance:

- a. Insertion Loss : $< 0.5 \text{ dB}$
- b. Fiber Extention : $-0.05\mu\text{m} < H < +0.05\mu\text{m}$
- c. $\phi 1.25\text{mm}$ Ferrule End-face Radius : $7 < R < 25\text{mm}$
 $\phi 2.5\text{mm}$ Ferrule End-face Radius : $8 < R < 25\text{mm}$
- d. Apex Offset : $< 50\mu\text{m}$
- e. Increase in insertion loss after 500 mating : 0.2 dB Max
- f. Operating Temperature : -20° to $+70^\circ$
- g. Storage Temperature : -40° to $+80^\circ$

Remack#

21.15.9950	MultiMode, LC-ST, 50/125 um	0.5M
21.15.9951	MultiMode, LC-ST, 50/125 um	1M
21.15.9952	MultiMode, LC-ST, 50/125 um	2M
21.15.9953	MultiMode, LC-ST, 50/125 um	3M
21.15.9955	MultiMode, LC-ST, 50/125 um	5M
21.15.9960	MultiMode, LC-ST, 50/125 um	10M

GENERAL TOLERANCE OF DIMENSIONS X.XXX ± 0.005 X.XX ± 0.05 X.X ± 0.1	DRAWING	06.JAN.2011	Abby	Rotronic Co.,Ltd.
	CHECK	06.JAN.2011	MAER	
	APPROVAL	06.JAN.2011	YTY	
		DATE	NAME	ITEM NO.: 21.15.XXXX 有吊卡
SCALE	1/1 (A4)	UNIT	mm	DES.: ST to LC Duplex patch cord
	DRAWING NO.	SFBJB020831xxxx36001(SA1)		A1
	DRAWING CLASSIFICATION	S	SHEET 1 OF 1	