


更改 REV	出图日期 DATE	设变内容 MODIFICATION	修改 DRAWN
A	2018/07/02		

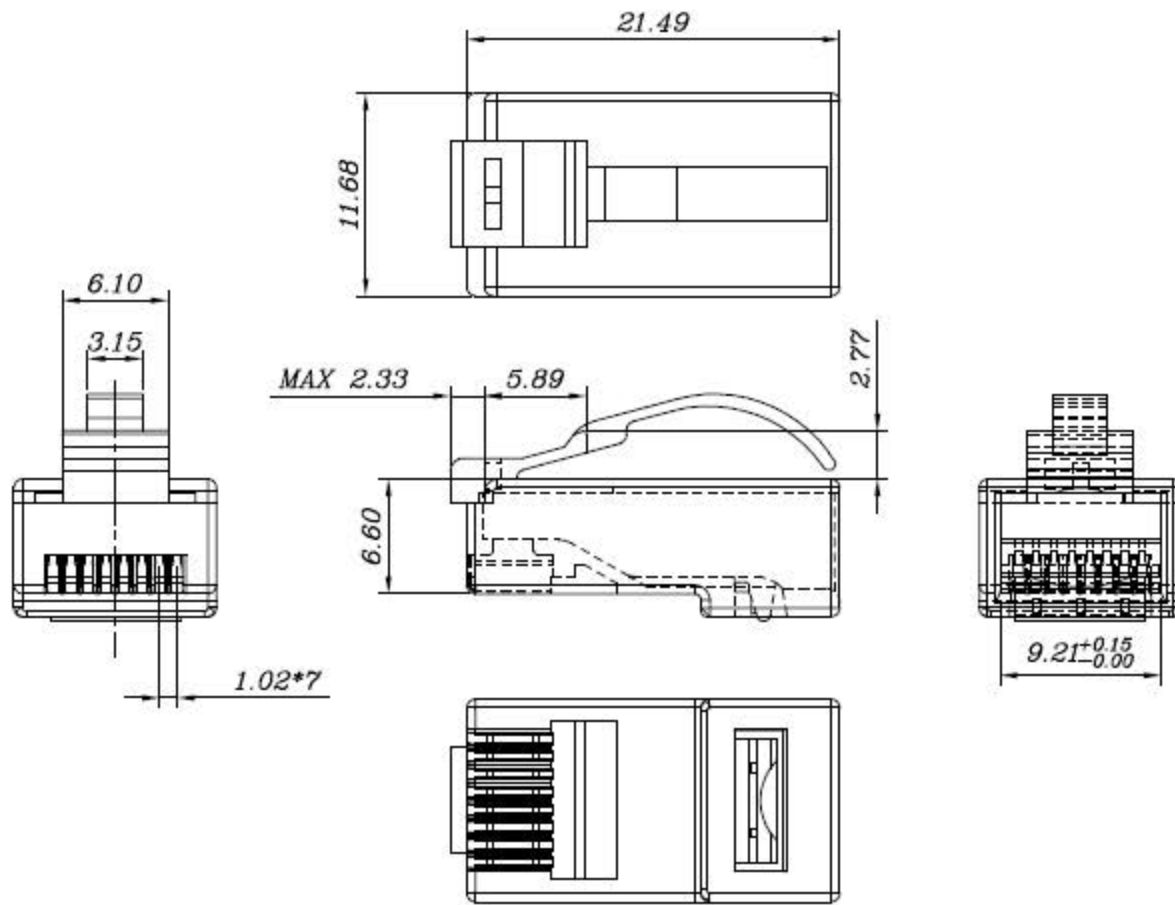

**SPECIFICATIONS**

**1. ELECTRICAL:**  
 UL APPLICATIONS: 250 VOLTS AC MAX. AT 2 AMPS.  
 DIELECTRIC WITHSTANDING VOLTAGE : 1000 VOLTS AC. 60 SEC.  
 INSULATION RESISTANCE: 500 MΩ.  
 CONTACT RESISTANCE: 20mΩ MAX.  
 OPERATING AMBIENT TEMPERATURE: -20°C ~ 75°C.

**2. MECHANICAL:**  
 STRAIN RELIEF: 20 POUND MIN.  
 DURABILITY: 1200 MATING CYCLES.

**3. MATERIAL:**  
 HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.  
 COLOR: TRANSPARENT OR OTHER COLOR ARE AVAILABLE.  
 CONTACT BLADE: COPPER ALLOY.  
 GOLD PLATING: 3u"~50u", ARE AVAILABLE.

**4. USAGE:**  
 SUITABLE FOR STRANDED & SOLID WIRE 23AWG ~ 26 AWG.

BLADE:	E	EB	Y	YB	Z	A	AE	AB	EC
Drawing									
Mark					✓				
GOLD PLATING	3Mu"	3u"	6u"	15u"	30u"	50u"	CABLE TYPE	ROUND	FLAT
Mark						✓	Mark	✓	

ITEM NO.	<b>21.17.3090</b>		
ROLINE Modular RJ45 Arch Latch Plug, Cat. 6, UTP			
DIMENSION IN mm (Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED		MATERIAL PC	<b>SECOMP</b>
.X±0.20	.X°±5°		
.XX±0.10	.XX°±2°		
审核 APPROVAL	核对 CHECKED	制图 DRAWN	SCALE 2/1 SHEET 1/1
<b>沈红波</b>	<b>钟均江</b>	Zach	角法 PBOJ
			更改 REV A