



3000+50/-0mm

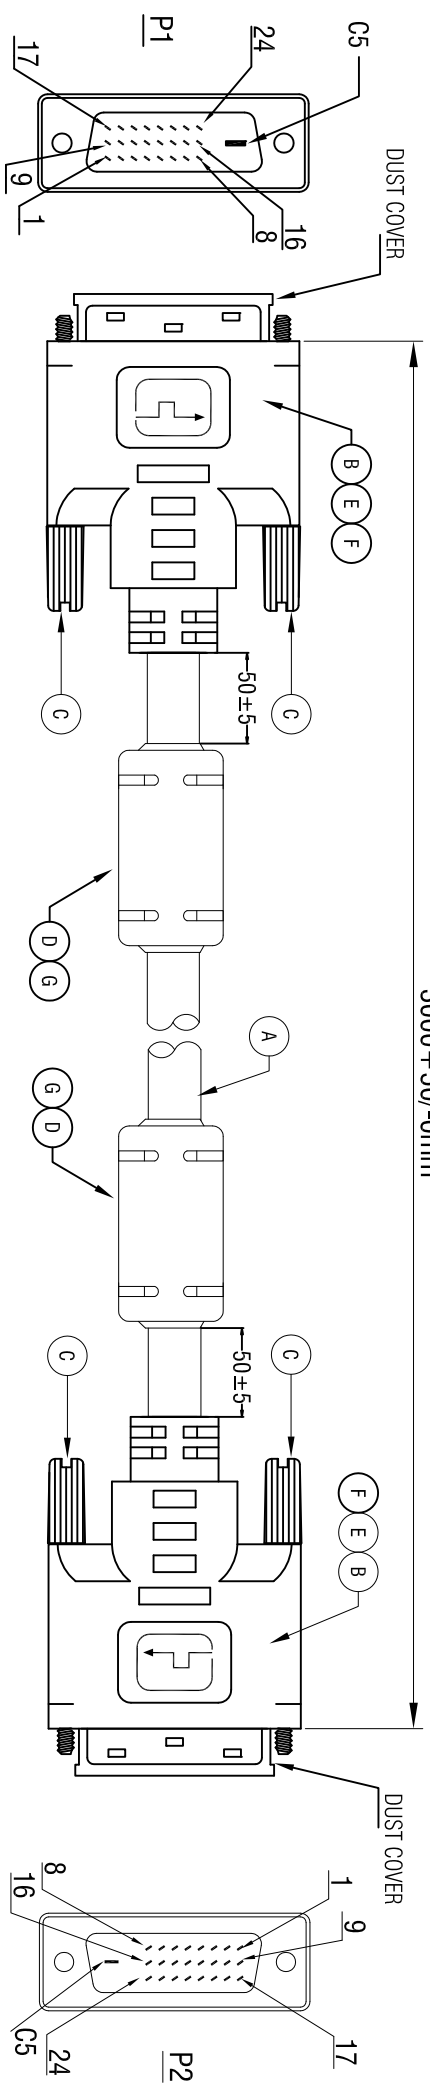

WIRE ADDRESS

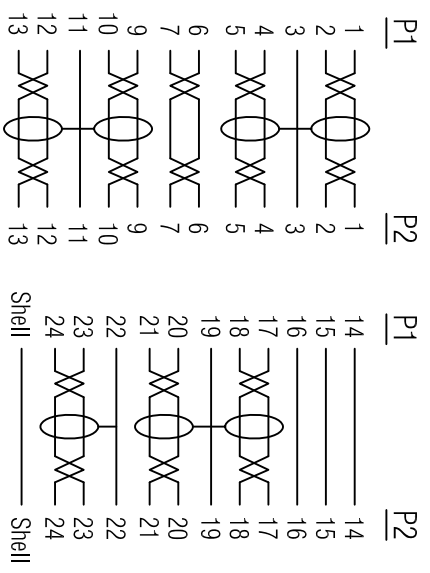

- Electrical Test:
- 1.100% TEST OPEN SHORT MIS-WIRE.
 - 2.CONTACT RESISTANCE:15Ω MAX.
 - 3.INSULATION RESISTANCE:5MΩ MIN.
 - 4.HI-POT:300V DC/10MS.
 - 5.Real Test Passed 2560*1600P 60HZ
 - 6.Real Test Not Twinkling, Double Vision and Decolor.

G	45P BLACK PVC		G
F	DVI SHELL (30P BLACK PVC)	2	PCS
E	DVI SPT	2	PCS
D	FERRITE (17.5*10.5*28.5mm)BLACK	2	PCS
C	Screw : #4-40UNC(Nickel Plated)BLACK MOLDING	4	PCS
B	DVI24 + 1 MALE (Black Insulator, Nickel Plated)	2	PCS
A	UI.20276(28#*1P(CS)+DAMI*7C+28#*1P(BG)+28#*2C(BG)+26#*1C(BG)+ADB.OP=8.5, BLACK PVC JACKET	1	PCS
NUMBER	PRODUCT SPECIFICATIONS	Quantity	Unit
1	2	4	
Sample NO.	F16	BOM.NO: 13853	Drawings of 1-(2) Proportion: 1:1 Unit(mm) A4



ROUTINE Monitor Cable, DVI M - DVI M, (24+1) dual link, 3.0m

Item 11.04.5535

Draw *Moko* Date: 2020.03.09

Approval

Duty F16 BOM.NO: 13853