


WIRE ADDRESS

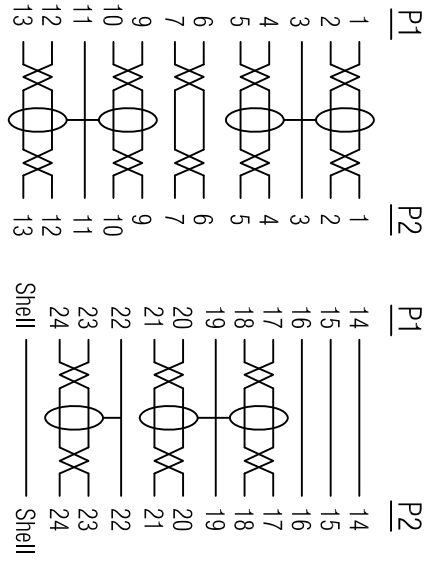

- Electrical Test:
- 1.100% TEST OPEN SHORT MIS-WIRE.
 - 2.CONTACT RESISTANCE:15Ω MAX.
 - 3.INSULATION RESISTANCE:5MΩ MIN.
 - 4.HI-POT:300V DC/10MS.
 - 5.Real Test Passed 2560*1600P 60HZ
 - 6.Real Test Not Twinking,Double Vision and Decolor.

G	45P PVC BLACK	G
F	DVI SHELL(30P BLACK PVC)	PCS
E	DVI SPT E	PCS
D	FERRITE(17.5*10.5*28.5mm)BLACK	PCS
C	Screw : #4-40UNC(Nickel Plated,BLACK MOLDING)	PCS
B	DVI24 + 1 MALE (Black Insulator, Nickel Plated)	PCS
A	UI.20276(D28#*1P(CCS)+DAM)*7C+28#*1P(BG)+28#*2C(BC)+26#*1C(BC)+ADB.OP=8.5, BLACK PVC JACKET	PCS
NUMBER	PRODUCT SPECIFICATIONS	Quantity Unit
1	2	4

ROLINE DVI Cable, DVI M-M , 10m

Item 11.04.5595

Draw *Moko* Date: 2020.03.09

Approval

Duty F16 BOM.NO: 13871

