


PIN OUT

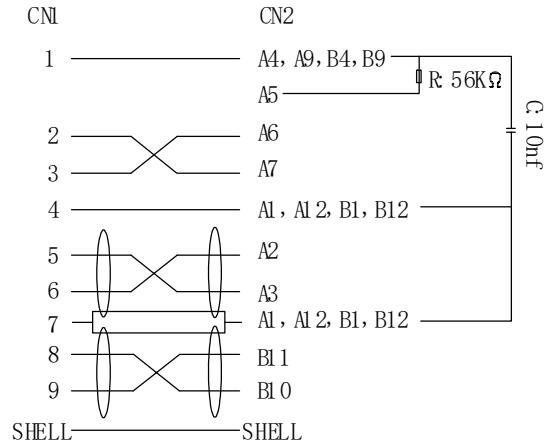

NOTE:

- Electrical test:
 - 100% open short & miss wire test;
 - Insulation resistance: 10MΩ;
 - Open resistance: 3Ω
 - Dielectric strength: 300V DC
- RoHS and Reach Compliant
- PRINTING: SUPER SPEED USB 3.2 CABLE AWM 2725 80°C 30V VW-1 RECYCLED
- Current Rate: 3A max
- Data Transfer: 10Gbps
- The proportion for the recycled material is more than 50%.

MATERIAL LIST:

⑤	OUTER MOLD	RECYCLED PVC color For black	2	
④	INNER MOLD	LD-PE	2	
③	USB TYPE A Male	USB TYPE A Male Type, The Pin Gold Plating, the shell for Nickel Plating	1	
②	USB TYPE C Male	USB TYPE C Male Solder Type, Black PBT Insulation, The Pin Gold Plating, the shell for Nickel Plating	1	
①	CABLE	[32AWG*1P+AEM]*2P+24AWG*2C+32AWG*1P+AL+D+B OD: 4.8±0.2MM Black/PVC RECYCLED	1	

11.45.9011	USB3.2 Gen2 Cable, A - C, M/M, 1m	1000±20
11.45.9010	USB3.2 Gen2 Cable, A - C, M/M, 0.5m	500±20
ITEM NO.	DESC.	LENGTH(mm)

NO.	PARTS NAME	SPECIFICATION STANDARD	QT'Y	REMARK
		NEW	2023-12-19	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

