



CONFIGURATION DETAILS OF
UNDIMENSIONED FEATURES
MAY VARY

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A0		2022/09/02	
A1	Change ITEM NO	2025/12/04	

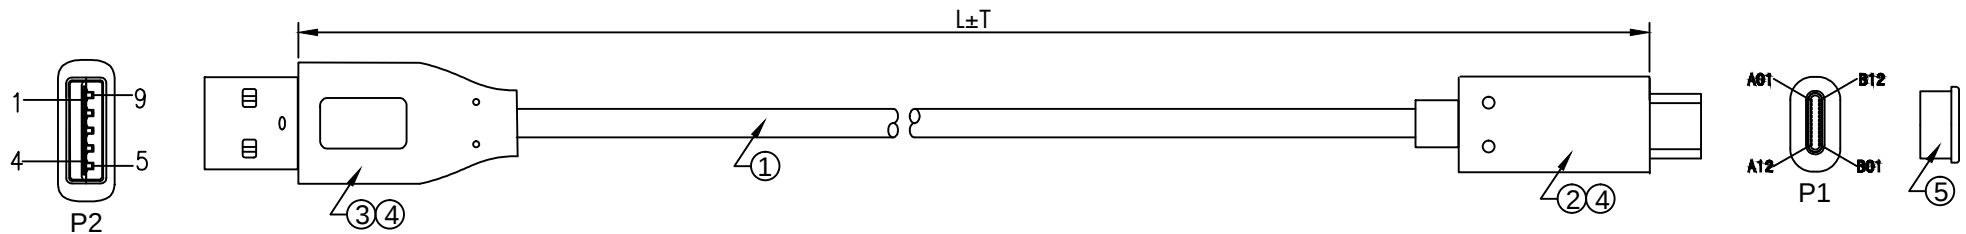

PIN ASSIGNMENT:

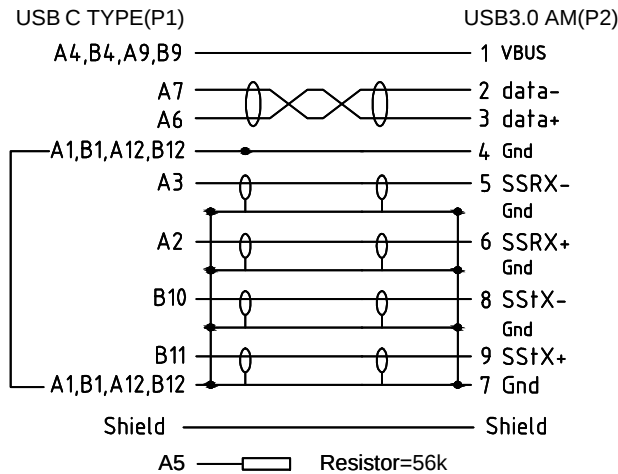

NOTE:
1.Electronic test
1.1 Open/short 100% test
1.2 Compliant with USB3.0 USB2.0 USB1.1
2.Printing:High Speed USB3.0 Cable AWM 2725 80℃ 30V VW-1
RoHS2.0(2011/65/EU) AND (2015/863/EU) WITH REACH COMPLIANT

ITEM NO.	LENGTH
11.55.3015	500±20
11.55.3016	1000±20

⑤	DUST COVER	TRANSPARENT PE	1	
④	OUTER MOLD	PVC/BLACK	2	
③	A MALE	USB TYPE A MALE ,GOLD PLATED PIN,NICKEL PLATED SHELL	1	
②	C MALE	USB TYPE C MALE W,GOLD PLATED PIN,NICKEL PLATED SHELL	1	
①	CABLE	32AWG(1/0.20 BC*1P+E+AM)*2P+32AWG(1/0.20 BC)*1P+8/0.20BC*2C+AM+E BRAID+JACKET,PVC/BLACK,OD4.5±0.2MM	1	
NO.	PART NAME	DESCRIPTION	QUANTITY	REMARKS

NAME	STANDARD USB 3.2 Gen1 Cable, A-C, M/M, (5V/3A),		
ITEM NO.	SEE THE CHART		
SECOMP		MAPE	TOLERANCE
			X. ±1.00 X.X ±0.50
		DRAW BY	SCALE MM
			PAGE 1/1