

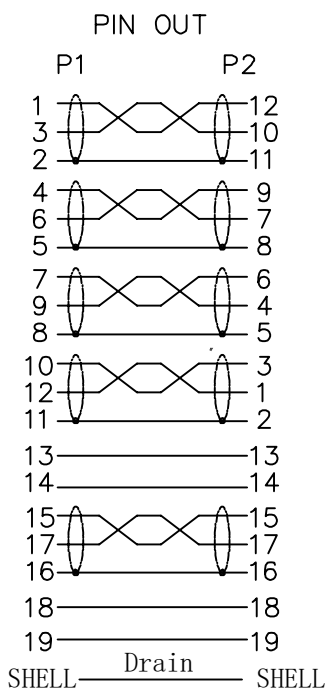


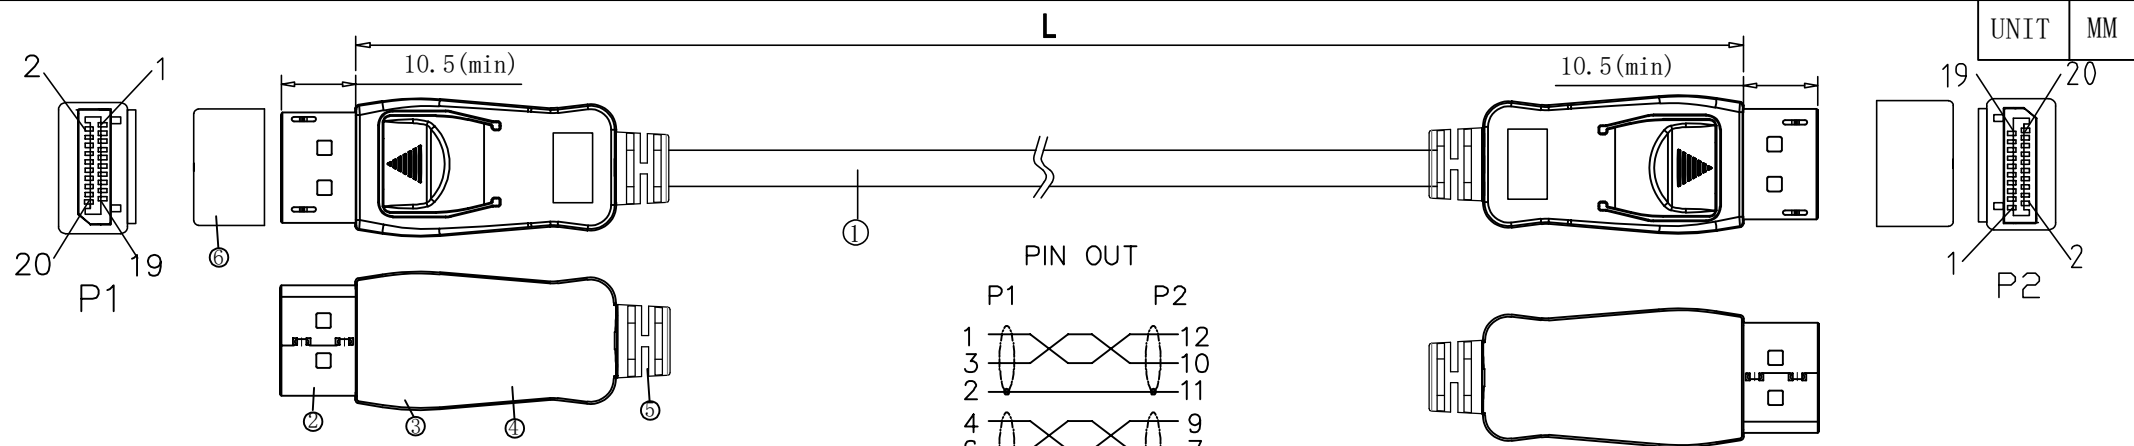

NOTE:

- 1. Electrical test:
 - (1). 100% open short & miss wire test;
 - (2). Insulation resistance: DC 300V 0.01s 10M ohm min;
 - (3). Contact resistance: 5 ohm max;
- 2. Computer + Monitor test
 - (1). Resolution: 3840*2160@120Hz
- 3. Marking: Display Port Cable AWM STYLE 20276 80°C 30V VW-1
- 4. RoHS2.0 and REACH Compliant

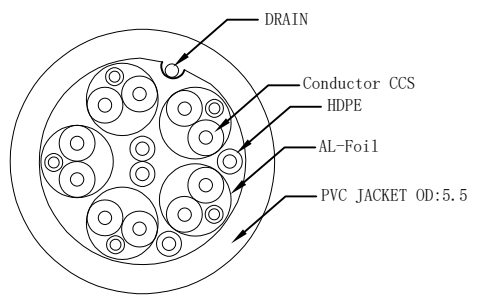

MATERIAL LIST:

⑥	Dust Cap	LD PE	2	
⑤	TUBE END	BLACK PVC 45P	2	
④	INNER COVER	LD PE	2	
③	OUTER COVER	DP 20PIN MALE BLACK ABS ASSEMBLY TYPE	2	
②	CONNECTOR	DP 20P/M WITH LATCHING SOLDER TYPE, BLACK INSULATION, THE PIN GOLD PLATED, THE SHELL FOR Gold PLATED	2	
①	CABEL	[(30AWG CCS)*1P+D+FAM]*5+(30AWG CCS)+HDPE*4C+AD PVC/BLACK JACKET, OD: 5.5±0.2MM	1	
NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT'Y	REMARK
Gao	Arvin	CHANGE THE ITEM NO. ①	2025-12-09	A1
		NEW	2022-09-29	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.



ITEM NO.	LENGTH
11.55.3695	1000±20mm
11.55.3696	2000±30mm
11.55.3697	3000±50mm

DESC.	STANDARD DisplayPort, v1.4 Cable, 8K60Hz, M/M, black
-------	--

SECOMP