



Datenblatt - Fiche technique - Data sheet

11.99.5501




VALUE KVM-Kabel (USB) für 14.99.3222/.3223, 3,0m

VALUE Câble KVM (USB), p. 14.99.3222/.3223, 3.0m

VALUE KVM Cable (USB) for 14.99.3222/.3223, black, 3.0 m

LIR	REV.	DESCRIPTION	DATE

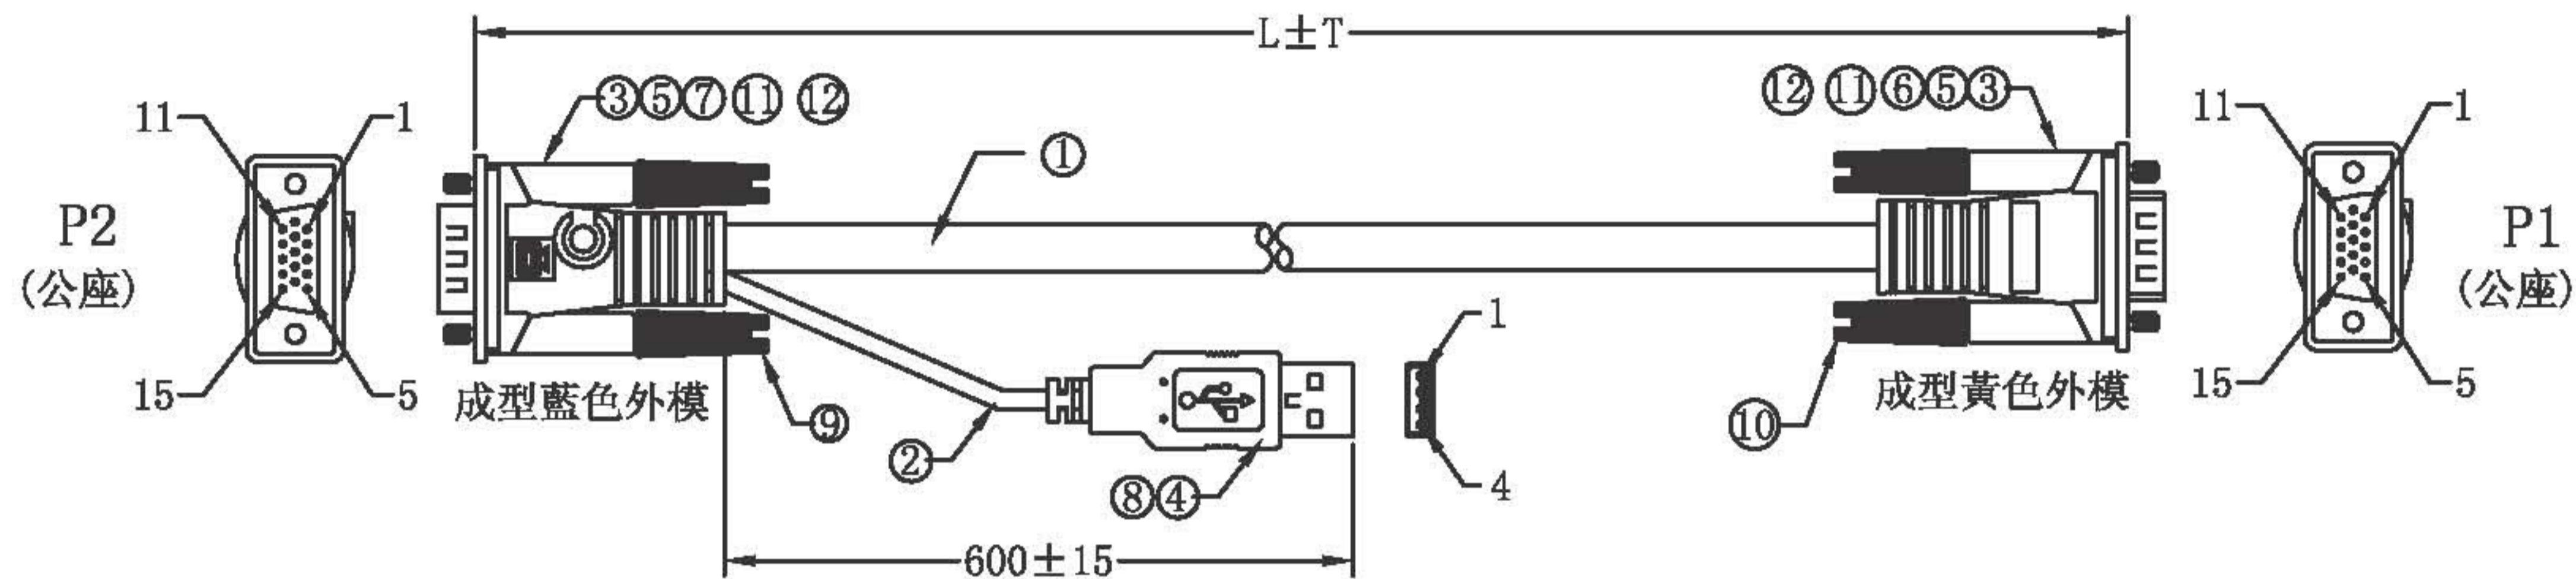


测试要求:

1. 每条线都必须100%做短断路测试.
2. 绝缘阻抗:10兆欧 最小值.
3. 导通阻抗:5 欧姆 最大值.
4. 导通电压:DC 300V.

Item No.	L (MM)	T (MM)
CVU-030	3000	50

接點

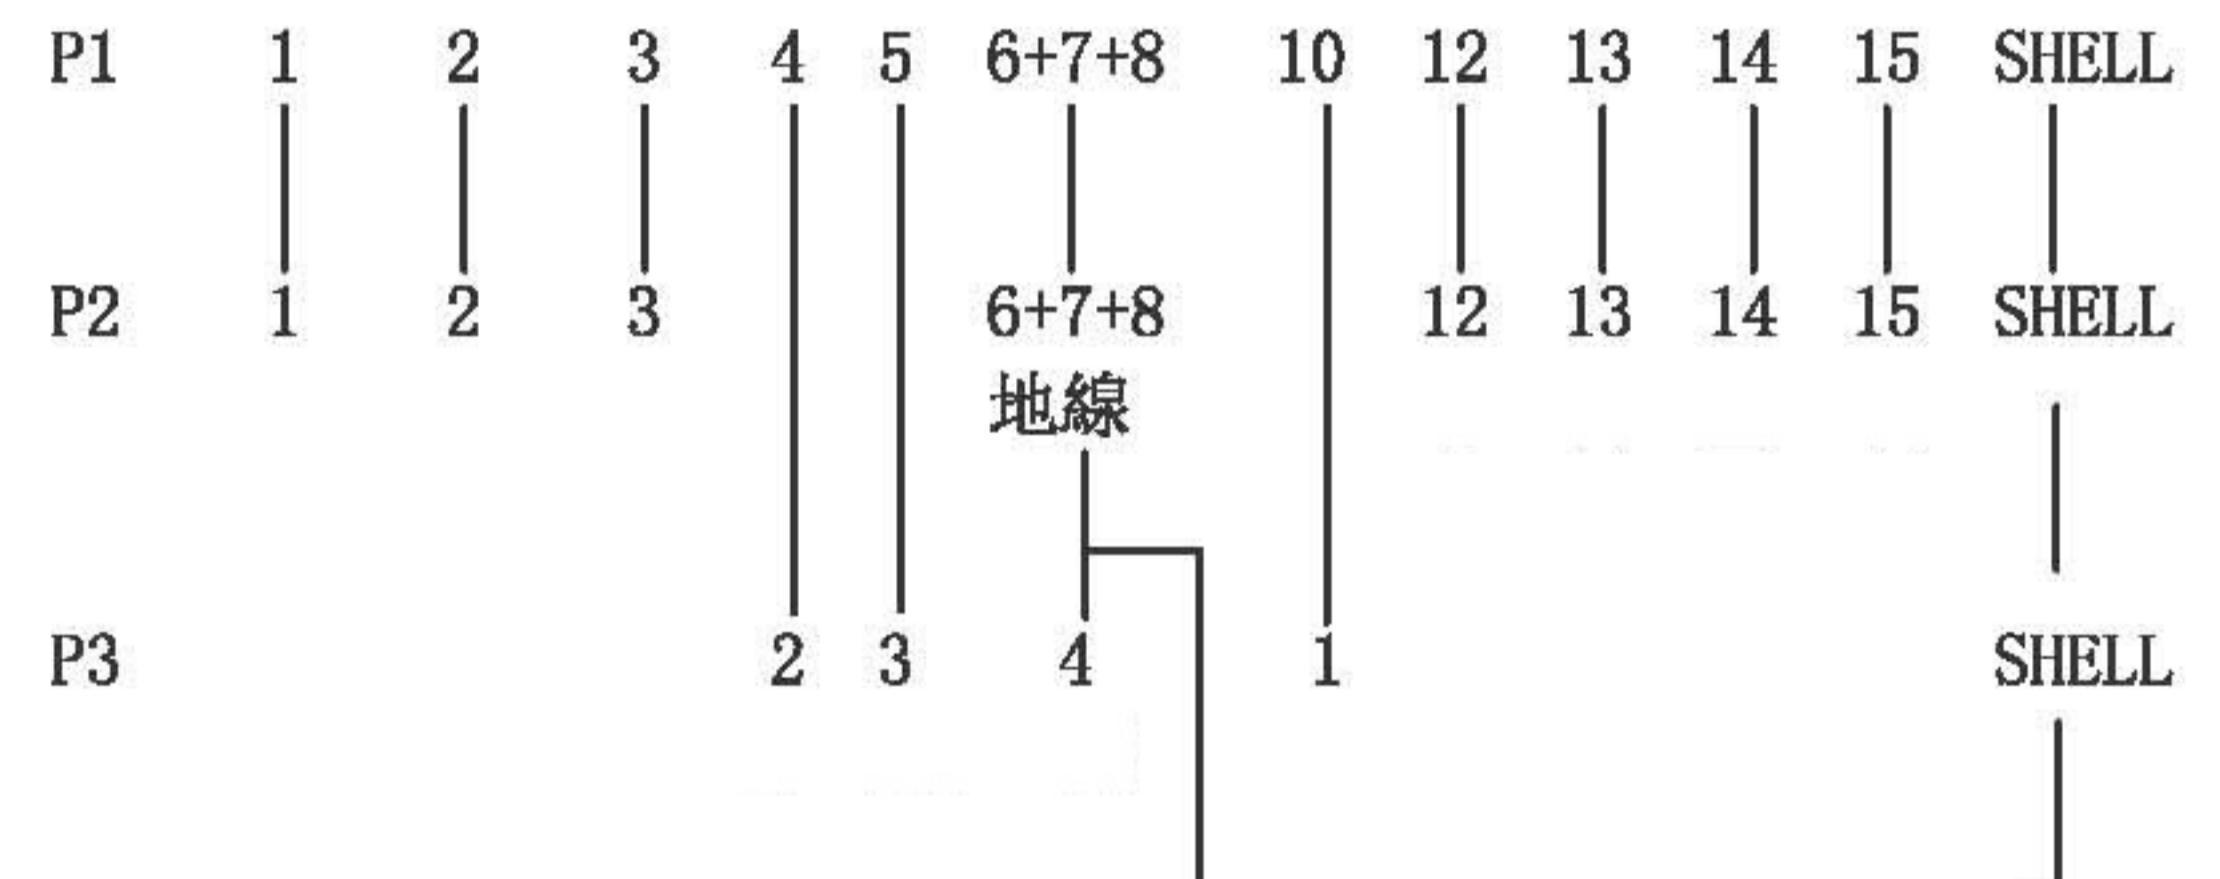

注:1.所有材料都需符合ROHS要求.

NO.	PART NO.	SPECIFICATION STANDARD	UNIT	QT' Y
12	CRD10T01BA01	熱縮套管,黑色,直徑1.0,L=12mm	PCS	2
11	CRD10T01BA01	熱縮套管,黑色,直徑1.0,L=18mm	PCS	2
10	CL4U40M5203	非標螺絲,4*47,鐵鍍鎳,成型黃色	PCS	2
9	CL4U40M5204	非標螺絲,4*47,鐵鍍鎳,成型藍色	PCS	2
8	CMPVC45BA01	PVC,45P,黑色	G	15
7	CMPVC45BL01	PVC,45P,藍色	G	20
6	CMPVC45YE01	PVC,45P,黃色	G	20
5	CMLDPEWH01	LD-PE內模料	G	25
4	CCUSBAM001	USB A/M,公端,白膠,殼鍍鎳,PIN針鍍金,焊綫式.	PCS	1
3	CCDB15M001	HDB15P,公端,藍膠,殼鍍鎳,焊綫式.	PCS	2
2	CNOUGB28104	NON-UL #28*4C+D OD:3.0 灰黑色	MM	620
1	CU2919GB28207	UL 2919 [(#28*1C+D+AL/MY)*3COAX+#28*7C+AEB] OD:8.0 灰黑色	MM	L

Tolerance	Inch	m/m
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

Drawing:

TOMMY

Check:

WAN

Approved:

OUYANG

Rotronic Co., Ltd.

Title:

KVM HDB15P/M+USB A/M TO HDB15P/M CABLE

Third Angle Projection



Item No. 11.99.5501

Customer P/N: CVU-XXX

Customer:

Dwg No. WSP-P-U1004

Date: 2011/7/7

RoHS

Scale: free

Units: mm

Rev. A. 0

Sheet 1/2