

Portable VGA Video Splitter, 2-way, 250 MHz

14.99.3523

User Manual

I. Description:

Video splitters enhance and duplicate video signals for long distance broadcasting (up to 50m) to at least 2 video outputs. Additionally, units can be daisy chained to handle as many monitors as the installation requires.


II. Features:

- Supports VGA, SVGA, XGA, UXGA and Mult-Sync monitors.
- Supports 250 MHz video bandwidth (model related).
- DDC and DDC2 support at Port1
- Daisy-chainable
- Supports two power ways: USB Port connected to the PC & DC adapter
9V/300mA (Optional)
- High resolution: 1920 ×1440

III. Specifications:

Model	Video Splitter with 250 MHz
Cable distance (device to monitor)	Max. 50m
Signal types	VGA, SVGA, XGA, UXGA and Multisync
Video Input Connectors	1x HDB-15 Male
Video Output Connectors	2x HDB-15 Female
Housing	Plastic
DC Power Adapter	DC 9V/300mA (optional)
Max. resolution	1920 x 1440

IV. Installation:

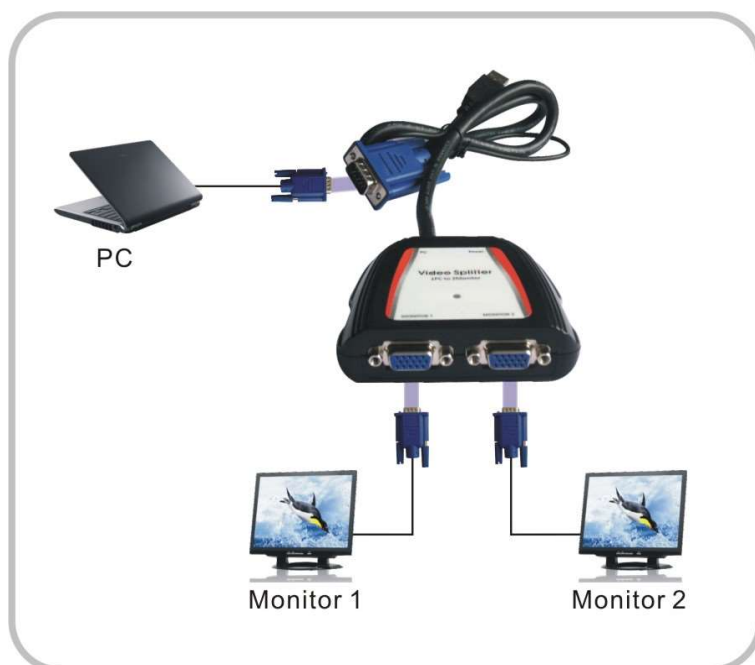

V. Limited Warranty:

In no event the direct vendor's liability exceed the price paid for the product from direct, indirect, special, incidental, or consequential damages resulting from the use of the product, dist, or its documentation. The direct vendor makes no warranty or representation, expressed, or statutory with respect to the contents or use of this Documentation, and specially disclaims its quality, performance, Merchantability. or fitness for any particular purpose. The direct vendor also reserves the right to revise to update. For further inquires please contact your direct vendor.