


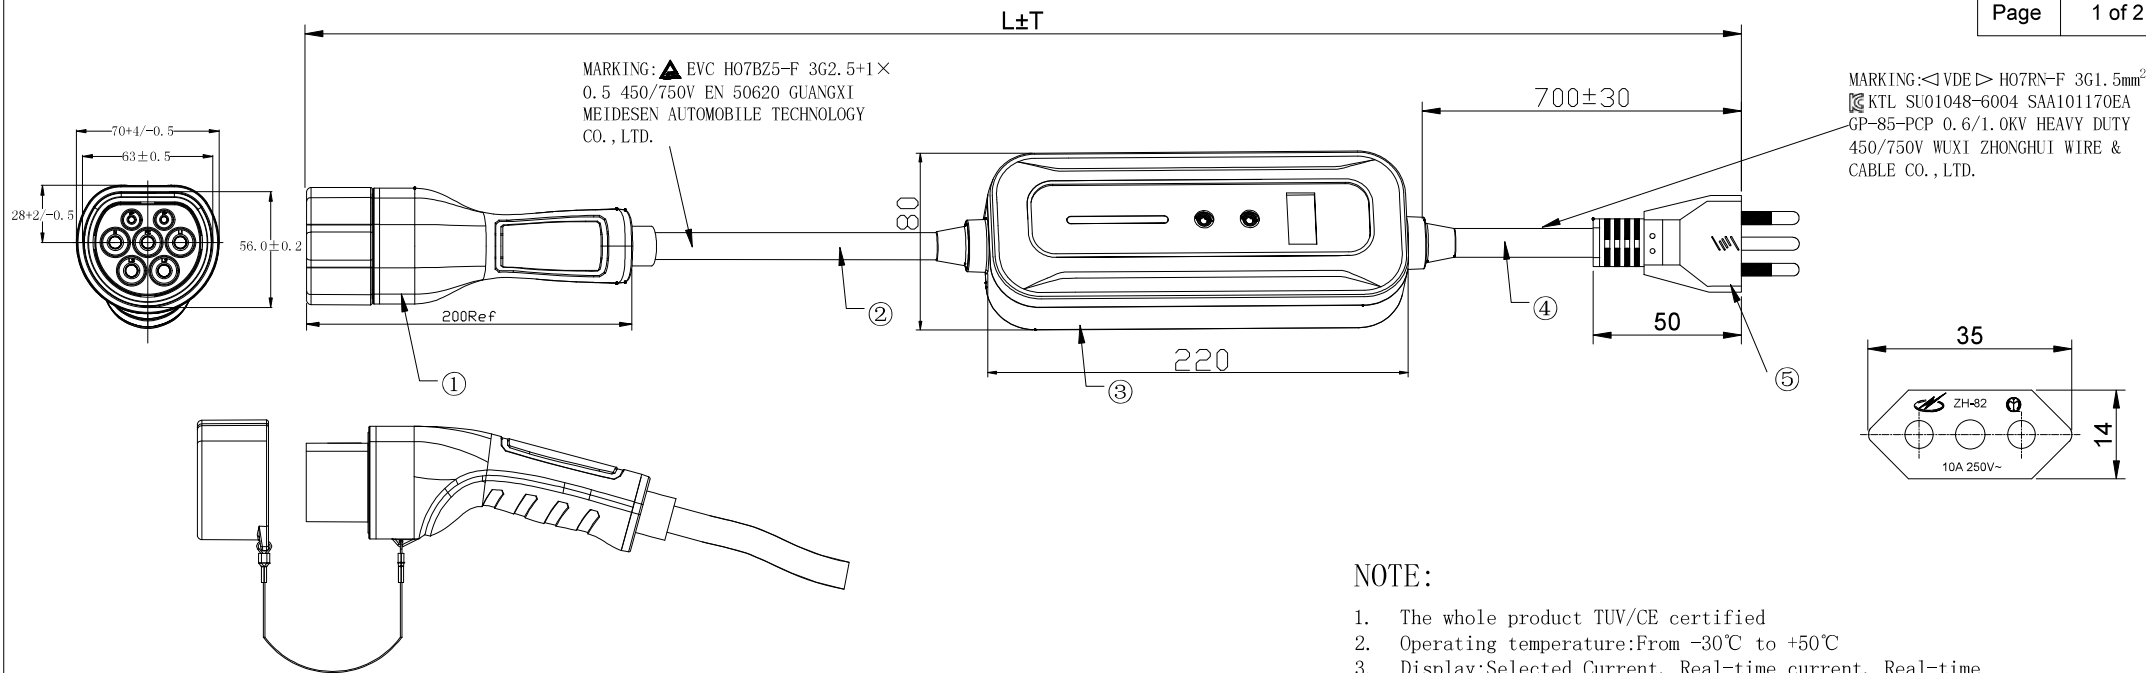

MATERIAL LIST:

⑤	Plug	TUV Certified, Type L Plug, IP20, 250V AC, 10A, CEI 23-50, IEC60884	1	
④	AC CABLE	VDE Certified, 3*1.5mm ² BC, BLACK, Rubber, OD:10.2±0.3mm	0.7m	
③	IC-CPD	TUV/CE Certified, In-cable control and protection device(with 0.6inch Screen), IP67	1	
②	EV cable	TUV certified, 3*2.5mm ² BC+1*0.5mm ² BC+F, BLACK TPU OD:11.7±0.3mm Flame retardant(IEC60332-1) Halogen free(IEC 60754-1/2) OIL resistant(IEC 60811-404) UV resistant(IEC 50289-4-17) Acid-proof alkaline(IEC 60811-404) Low-temperature impact(EN 60811-506) Water absorption (IEC60811-402) Hydrolysis resistant(IEC60811-2-1)	L±T	
①	EV Connector	TUV/CE certified, Vehicle end plug with Dust Cup , 16A European standard Single-phase, IP65 mated, IP54 Unmated	1	
NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT'Y	REMARK
		NEW	2023/9/15	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.



NOTE:

- The whole product TUV/CE certified
- Operating temperature:From -30℃ to +50℃
- Display:Selected Current, Real-time current, Real-time voltage, Real-time power,Charging electricity, Charged time/Reservation time, Temperature etc.
- Eleven protection measures: ①Over-Voltage protection ② Under-Voltage protection③Over-Current protection ④Temperature protection ⑤PCB mainboard overheat protection⑥Ground protection ⑦ Leakage protection ⑧Lighting protection ⑨Vehicle diode protection ⑩Relay protection ⑪Short circuit protection
- Mechanical life:>10000 times
- Insertion force:<100N
- Rated voltage :250V AC
- Rated current:6/8/10A
- Leakage protection:TypeB, 30mA (AC), 6mA (DC)
- RoHS and REACH Compliant
- Packing:1pc/PE bag/ carry-bag (roline Logo) /brown box + Roline label

ITEM NO.	LENGTH
19.08.0123	3000±75mm
19.08.0125	5000±100mm
19.08.0127	7500±150mm

DESC.	ROLINE EV Port. Charger (2.3kW, IP65 mate, IP54 unmated, 1Ph.) 3P ITA & Type2
-------	---


SECOMP

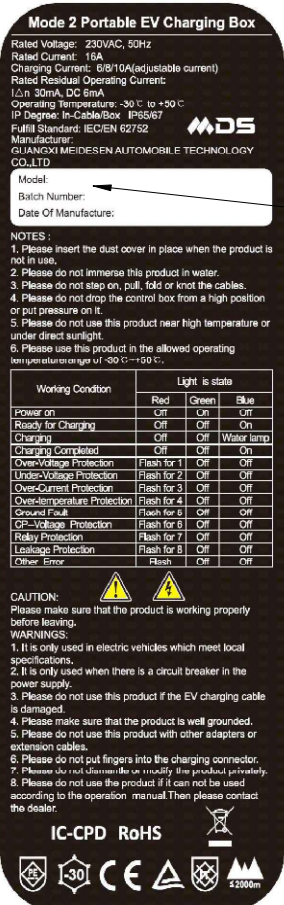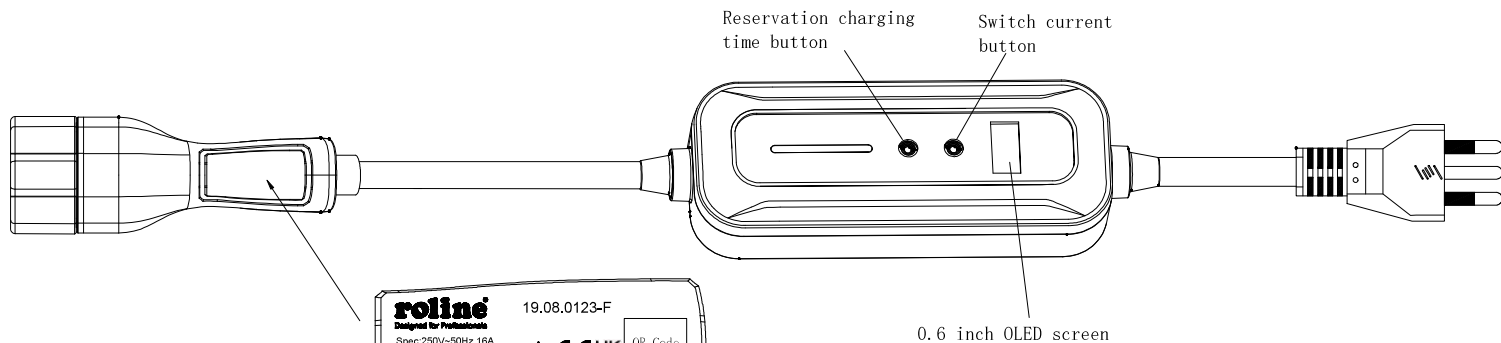

Fill in the blank space:
Model: SECOMP item No
Italy/ max.10A/ meter
Order No.
Product manufacturing date

ITEM NO.
countries/currents/meters

Font:Arial 6.5pt



Front



Back

DESC.	ROLINE EV Port. Charger (2.3kW, IP65 mate, IP54 unmated, 1Ph.) 3P ITA & Type2
-------	---

SECOMP

		NEW	2023/9/15	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.