MOLDING:
SF-04
SF-300K

DATE	REV.	REVISION	DRAFTING	CHECKED
2025.05.23	A/1	1 add the size specification	JHY	
2025.06.05	A/2	2 Change Length	LSY	

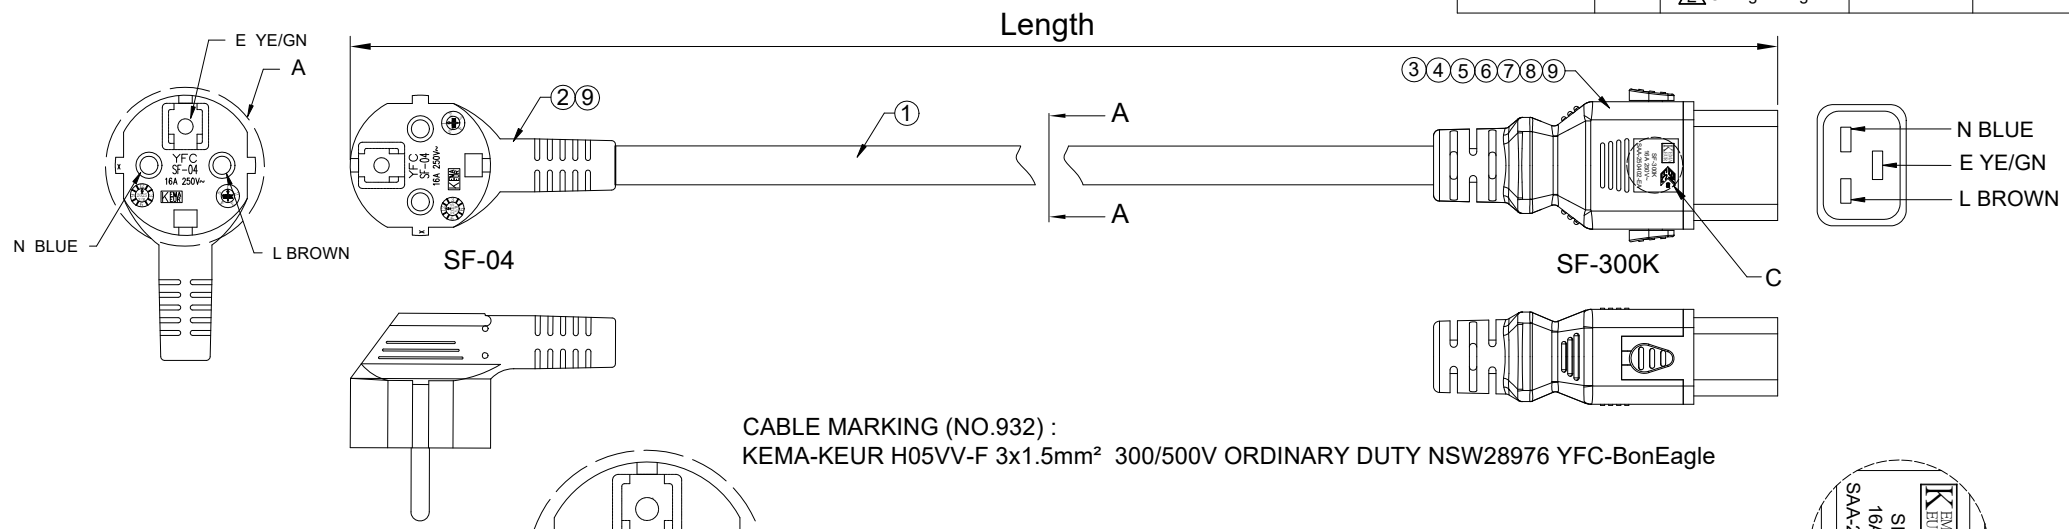

CABLE MARKING (NO.932) :
KEMA-KEUR H05VV-F 3x1.5mm² 300/500V ORDINARY DUTY NSW28976 YFC-BonEagle



A
1.5:1

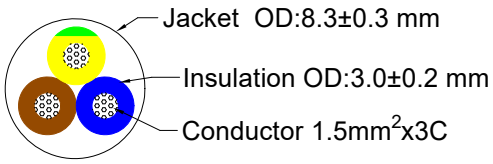

A-A

C
3:1

Polarity and Conduction and PunctureTest	
Dielectric Voltage Withstand Test : 2000V / 1 Sec	
Electrical Performance (20°C)	
Item	Parameter
Conductor Resistance	≤ 13.3Ω/1000m
Voltage Rating	AC 300/500V

Customer Item NO.	Pantone Cable Color	YFC Cable Color	Pantone Molding Color	YFC Molding Color	Length (mm)
19.08.1038	Black 6 C	BK012	Black 6 C	BK012	800±15
19.08.1039	Black 6 C	BK012	Black 6 C	BK012	1800±30
19.08.1040	Black 6 C	BK012	Black 6 C	BK012	3000±30

2

PINOUT			
SF-04		SF-300K	WIRE
E		E	YE/GN
L		L	BROWN
N		N	BLUE

No.	TITLE	DESCRIPTION	Q'TY
⑨	Molding	Molding 40P PVC	AR
⑧	Metalwork	SF-300K Metal lock	1PC
⑦	Housing	SF-300K Black pull rod	1PC
⑥	Housing	SF-300K Black top cover	1PC
⑤	Housing	SF-300K Black outer shell	1PC
④	Housing	SF-300K One piece of inner frame C19 Three plug BK	1PC
③	Terminal	SF-300K IEC C19 Female Three Plug Straight Insert Of Common Terminal Brassy Yellow 1.5mm²	3PCS
②	Terminal	SF-04 One piece of inner frame Nickel plated 1.5mm² Black	1PC
①	Cable	H05VV-F 1.5mm² 3C PVC 300/500V	1PC

Unless specified on the drawing, tolerances are per the follows:

X.	±0.20	X°	±3
.X	±0.10	.X°	±0.3
.XX	±0.05		

SECOMP

DRAW. NO	GFAC-S250075	TITLE	H05VV-F 1.5mm² 3C SF-04 TO SF-300K CABLE ASS'Y		
CUSTOMER	矽肯				
CUST'R P/N	--	DRAW	LSY	DATE	2025.06.05
SCALE	1:1	CHECK		DATE	
UNIT	mm	APPROVED		SHEET	1 of 1

Cable Spec NO.	GFDY-C240131	Part Number	--	Note	■ RoHS2.0	■ Reach	□ GP	□ HF	□ Other