
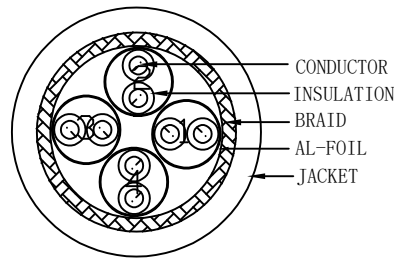


WIRING DIAGRAM

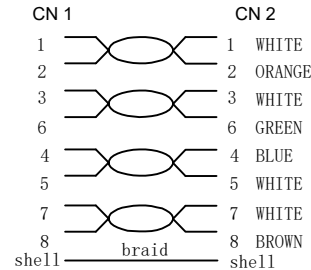

- NOTE:
- ELECTRICAL TEST:100% OPEN SHORT, MISS WIRE TEST
 - FLUKE Channel LINK TEST:
TEST LIMIT:ISO11801 Channel Class EA
 - Storage temperature:-10°C~+60°C
Working temperature:-20°C~+75°C
 - RoHS2.0 AND REACH compliant
 - Spray WORD:CAT6A S/FTP 4x2x28AWG/7 LSZH ISO11801 &EN50173 & ANSI/TIA 568.2-D
 - Support PoE per IEEE 802.3af, PoE+ per IEEE 802.3at, PoE++ per IEEE 802.3bt
 - Minimum of the bending radius is 6*ODmm(Suitable for all meters)

MATERIAL LIST:

③	OVER MOLD	75A PVC Green (Pantone 3278C)	2	
②	PLUG	RJ45 8P8C SHIELDED Plug PIN GOLD PLATED 3U", THE SHELL PLATED NICKEL, COLOUR: TRANSPARENT BLUE	2	
①	CABLE	S/FTP CAT. 6A 28AWG (BC+AL-FOIL)*4P+BRAID (AL-MG) JACKET: Green (Pantone 3278C) LSZH OD: 4.5 ± 0.2mm	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

21. 15. 4338	ROLINE PatchCord S/FTP (PiMF) Cat. 6A Slim, DATACENTER, LSOH, tangle free, 0.3m	300 ± 10
21. 15. 4330	ROLINE PatchCord S/FTP (PiMF) Cat. 6A Slim, DATACENTER, LSOH, tangle free, 0.5m	500 ± 15
21. 15. 4331	ROLINE PatchCord S/FTP (PiMF) Cat. 6A Slim, DATACENTER, LSOH, tangle free, 1m	1000 ± 20
21. 15. 4334	ROLINE PatchCord S/FTP (PiMF) Cat. 6A Slim, DATACENTER, LSOH, tangle free, 1.5m	1500 ± 30
21. 15. 4332	ROLINE PatchCord S/FTP (PiMF) Cat. 6A Slim, DATACENTER, LSOH, tangle free, 2m	2000 ± 30
21. 15. 4333	ROLINE PatchCord S/FTP (PiMF) Cat. 6A Slim, DATACENTER, LSOH, tangle free, 3m	3000 ± 50
21. 15. 4335	ROLINE PatchCord S/FTP (PiMF) Cat. 6A Slim, DATACENTER, LSOH, tangle free, 5m	5000 ± 100
21. 15. 4336	ROLINE PatchCord S/FTP (PiMF) Cat. 6A Slim, DATACENTER, LSOH, tangle free, 7m	7000 ± 200
21. 15. 4337	ROLINE PatchCord S/FTP (PiMF) Cat. 6A Slim, DATACENTER, LSOH, tangle free, 10m	10000 ± 200
ITEM NO.	DESC.	LENGTH



		NEW	2024-06-25	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.