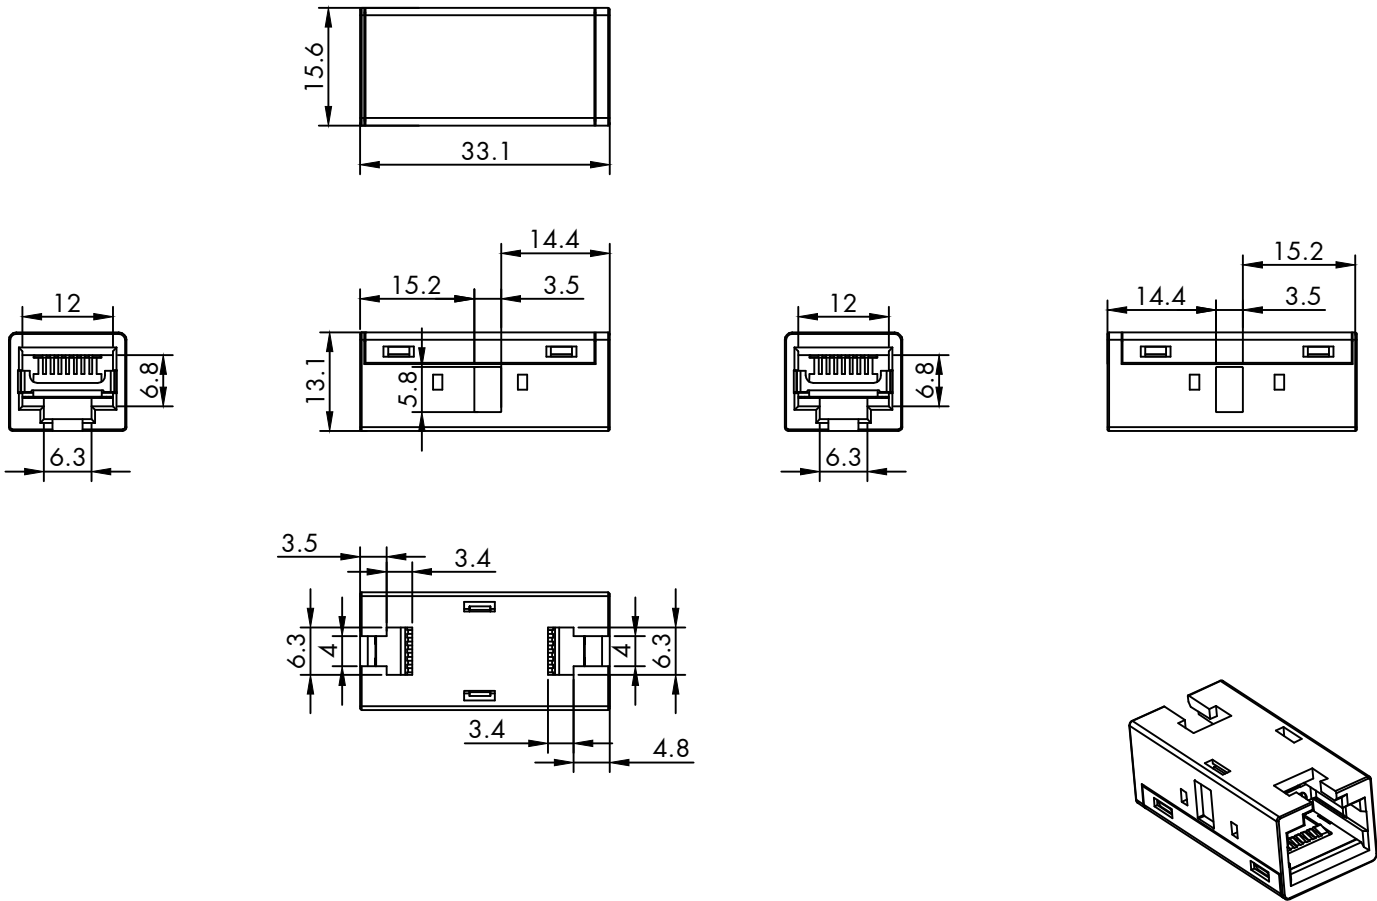


CONFIGURATION DETAILS OF  
UNDIMENSIONED FEATURES  
MAY VARY

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A0	INITIAL RELEASE	2024.04.09	





NTOE  
ELECTRICAL:  
1.VOLTAGE RATING:125 VAC RMS  
2.CURRENT RATING:1.5AMP  
3.CONTACT RESISTANCE:100MILLIOHMS MAX  
4.INSULATION RESISTANCE:1000 MEGOHMS MIN@500 VDC  
5.DIELECTRIC STRENGTH:750 VAC RMS 60HZ,1 MIN

ENVIRONMENTAL  
1.STORAGE:-40 °C~85°C  
2.OPERATION:0 °C~70°C

MECHANICAL:  
1.SHELL:ZINC ALLOY WITH STEEL PLATE  
2.PLASTIC: PC/WHITE  
3.PCB MATERIAL:FR-4 T=1.2mm  
4.TERMINAL PINS:PHOSPHOR BRONZE,GOLD PLATED  
5.RJ45 CONTACT LIFE:750 TIMES MIN

RoHS2.0[2011/65/EU] AND [2015/863/EU] WITH REACH COMPLIANT

NAME	ROLINE In-line Coupler RJ45-RJ45 Cat6A Shielded Metal Housing		
ITEM NO.	21.17.3097		
		MAPE	TOLERANCE
			X. ±1.00 X.X ±0.50
		DRAW BY	SCALE MM
			PAGE