




FRONT

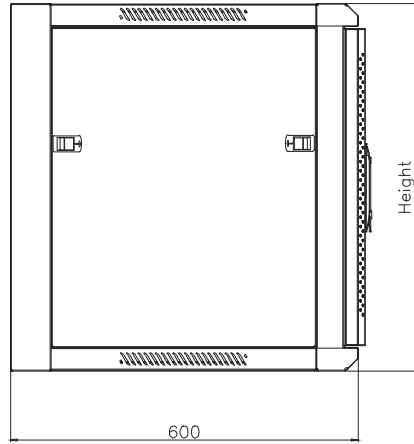


SIDE

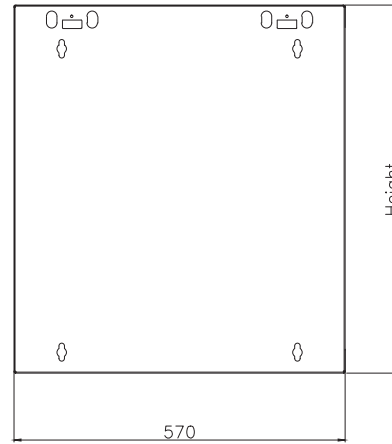


BACK

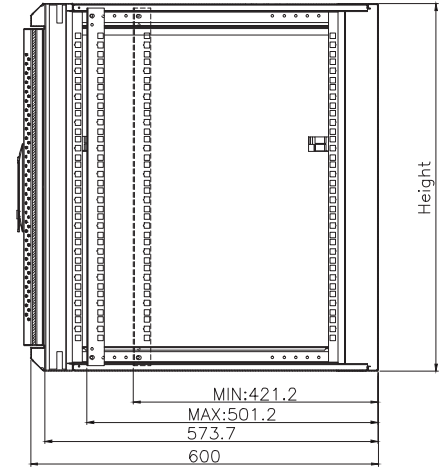

A-A

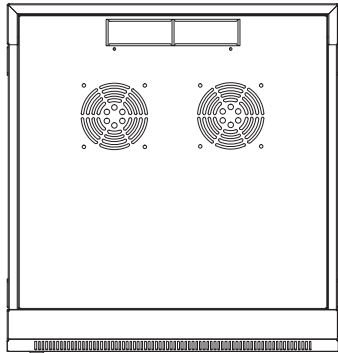

TOP

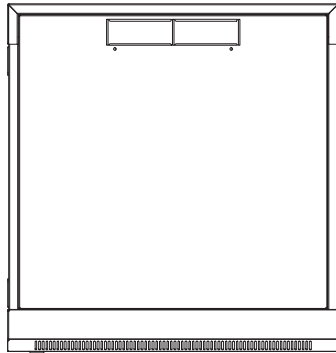

BOTTOM

Model No.	Capacity(U)	Height (mm)
SE5606■00	6	370
SE5609■00	9	500
SE5612■00	12	635
SE5618■00	18	900

**Standard:**

Comply with ANSI/EIA  
RS-310-D、IEC60297-2、DIN41494;PART1 ;  
DIN41494;PART7

**Material:**

SPCC Cold Rolled Steel ;  
rails: 1.2mm, others: 1.0mm

**Loading capacity:**

Static loading: 60KG

**Feature:**

- **Flat packing and patent frame , packing time is less than 5 minutes , around 1/3~1/4 assembled original volume when flat pack**
- Cable entry on both of top cover and bottom panel
- Steel front door , opening direction of door can be changed , turning angle of front door is over 180 degrees
- Different optional style of doors
- Wall mounted panel, convenience for installation , locked from inside with screw , avoiding to be stolen or accidentally dropped
- Flat side panel, easy installation
- Installation depth of mounting profile can be available changed
- 19"standard installation ;