




FRONT

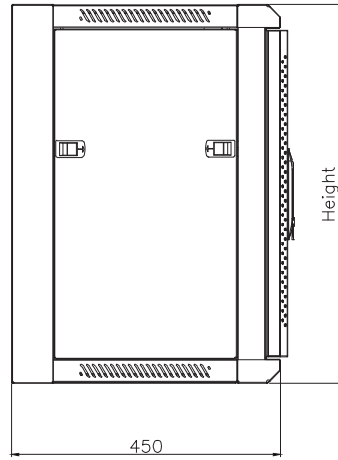


SIDE

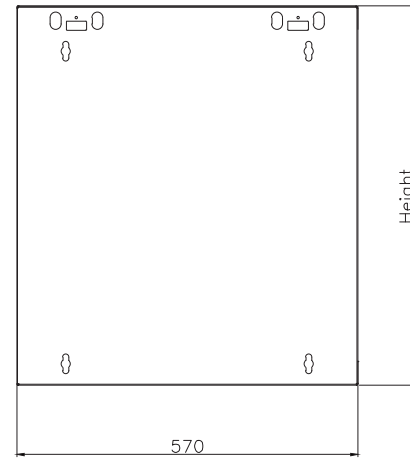


BACK

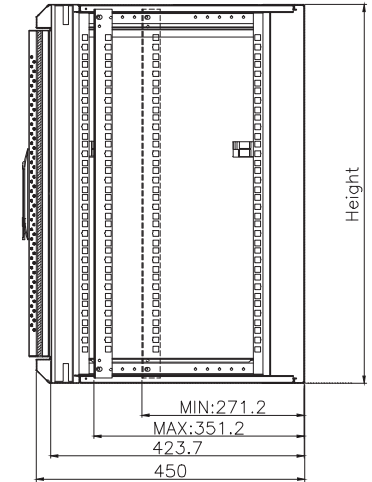

A-A



TOP



BOTTOM

| Model No. | Capacity(U) | Height (mm) |
|-----------|-------------|-------------|
| SE5406■00 | 6 | 370 |
| SE5409■00 | 9 | 500 |
| SE5412■00 | 12 | 635 |
| SE5415■00 | 15 | 770 |
| SE5418■00 | 18 | 900 |

Standard:

Comply with ANSI/EIA RS-310-D、IEC60297-2、DIN41494;PART1; DIN41494;PART7

Material:

SPCC Cold Rolled Steel; rails: 1.2mm, others: 1.0mm

Loading capacity:

Static loading: 60KG

Feature:

- Flat packing and patent frame , packing time is less than 5 minutes , around 1/3~1/4 assembled original volume when flat pack
- Cable entry on both of top cover and bottom panel
- Steel front door , opening direction of door can be changed , turning angle of front door is over 180 degrees
- Different optional style of doors
- Wall mounted panel, convenience for installation , locked from inside with screw , avoiding to be stolen or accidentally dropped
- Flat side panel, easy installation
- Installation depth of mounting profile can be available changed
- 19"standard installation ;