



UNIT MM

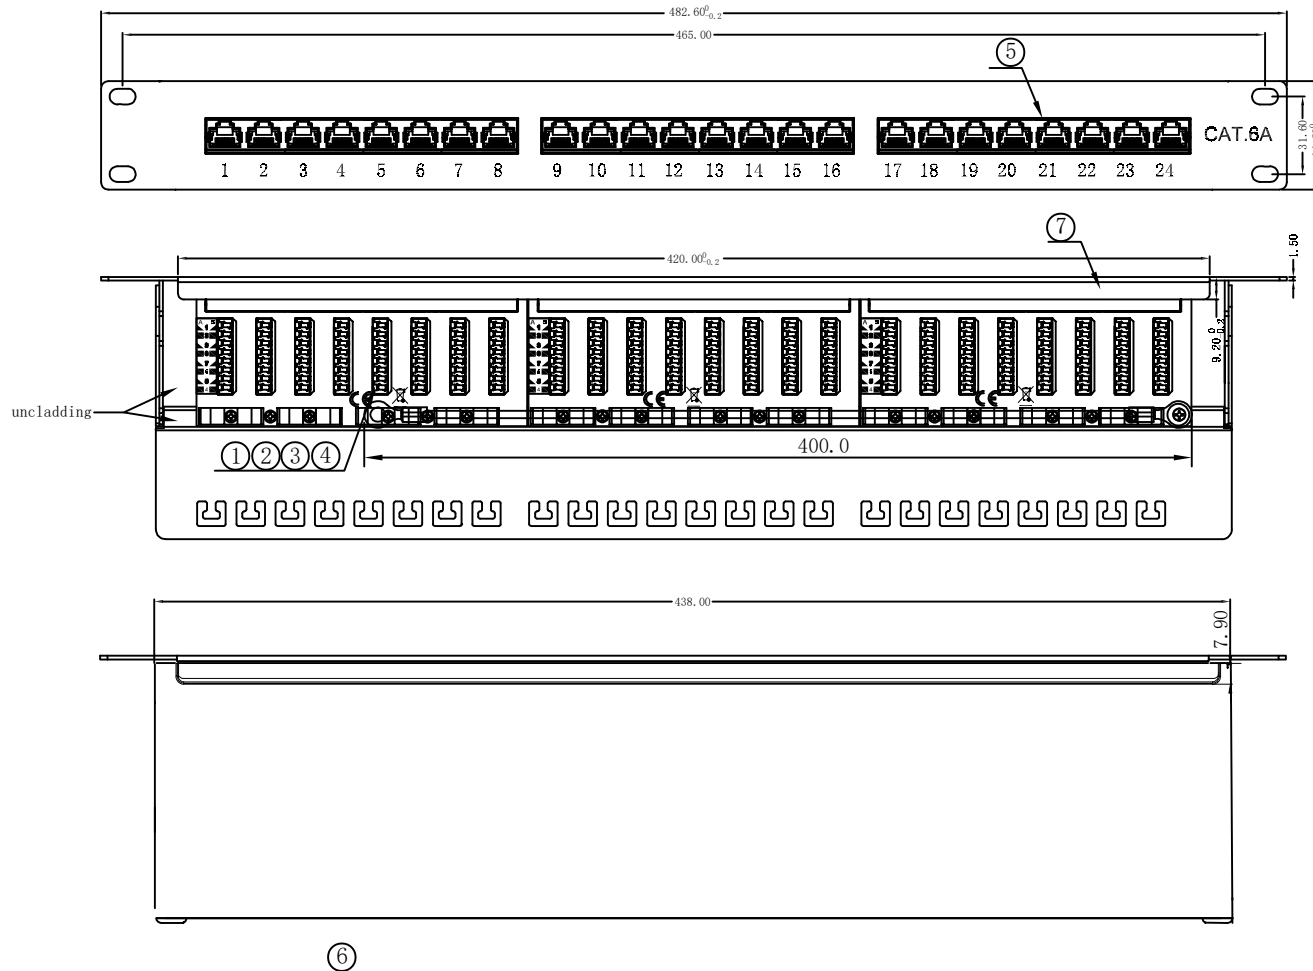

- NOTES:
- ELECTRICAL:**
- VOLTAGE RATING : 125V AC RMS
 - CURRENT RATING : 1.5A mp
 - CONTACT RESISTANCE : 100 MILLI OHMS MAX
 - INSULATION RESISTANCE : 1000M OHMS MIN @ 500V DC
 - DIELECTRIC STRENGTH : 750V AC RMS 60Hz, 1MIN
 - CAT. 6A PERMANENT LINK : CONFORM TO ANSI/TIA/EIA-568.2-D ISO/IEC 11801:2010 CLASS EA

- ENVIRONMENTAL:**
- STORAGE: -40°C TO +70°C
 - OPERATION: -10°C TO +60°C
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68 RJ45 JACK COMPLY TO REQUIREMENTS OF IEC-60603-7-5

- MECHANICAL**
- SHIELD MATERIAL BRASS C2680 T=0.25MM
 - HOUSING MATERIAL PBT+15%GF
 - CONTACT MATERIAL PHOSHOR BRONZE PLATING GOLD
 - PANEL FRAME ZN PLATING
 - IDC MATERIAL: PC TERMINAL:PHOSPHOR BRONZE, TIN PLATING
 - RJ45 JACK LIFE: 750 TIMES MIN
 - IDC LIFE : 200 TIMES MIN
 - RETENTIVENESS OF INSERTION STRUCTURE: 50N 60±5s

PoE per IEEE 802.3af, PoE+ per IEEE 802.3at, PoE++ per IEEE 802.3bt

Accessory:

- Cable Tie(75X3mm) ×24Pcs
- Instruction Sheet
- Screw and Nut M6*18mm x 4set

RoHS2.0 & REACH COMPLIANT

⑦	Bottom Panel	1.5mm thickness Metall Panel with plastic powder cladding Full shield	1	
⑥	Upper Panel Cover	1.0mm thickness Metall Panel with plastic powder cladding Full shield	1	
⑤	RJ45 Jack	Housing PBT Pin-8P8C gold plated	24	
④	PCB	1.6mm/With T568A/B label	3	26.99.0365
③	IDC Body	PC/ABS With Coded Printing T568A/B	24	26.99.0364
②	IDC Pin	Phosphor Bronze & Tinned	192	ITEM NO.
①	IDC Terminal	For 22-26 AWG Cable	24	DESC.
NO.	PARTS NAME	SPECIFICATION STANDARD	QT'Y	REMARK
		ADD THE ITEM	2024-06-20	A1
		NEW	2023-07-03	A0
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

