

STANDARD UTP Patch Cord Cat.5e (Class D), beige, 20 m

Product No.

11.55.1419


SECOMP®

Manufacturer

SECOMP

Manufacturer No.

11.55.1419

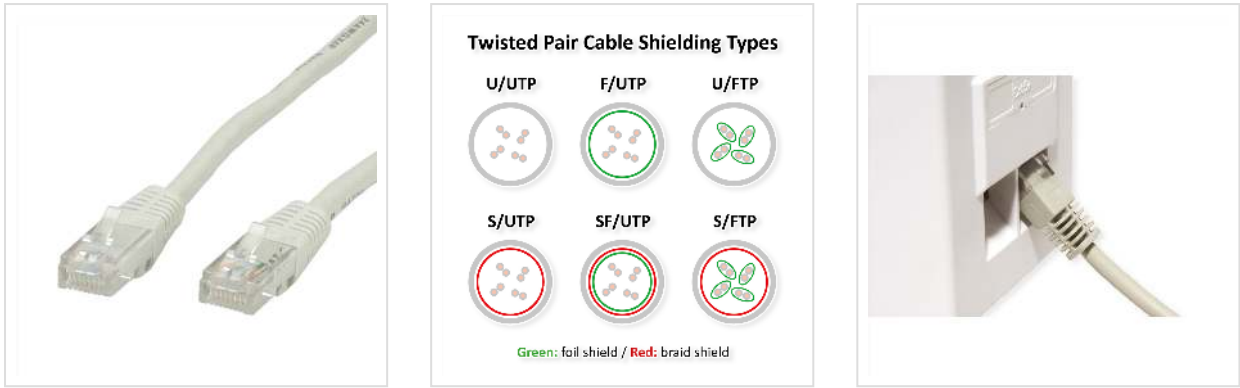

Pre-assembled Cat.5e (Class E) U/UTP Patch Cord with RJ-45 connectors and kink protection - ideal for LAN environments, patch panels, and to connectend-user devices like computers.

- Patch Cord for networking connections between devices.
- Prepared unshielded Twisted Pair cable with RJ-45 connectors on both ends.
- Durable due to moulded kink protection.
- Flexible cable, suitable for narrow bending.
- Contact settings 1:1, in accordance with the EIA/TIA 568 standard.
- Construction: 4-pair stranded wire.

Technical specifications	
Manufacturer	SECOMP
Product group	Twisted Pair Cable
Product type	U/UTP patch cord
Colour	beige
Length	20 m
Scope of delivery	Patch Cord

Shield type	U/UTP
Transfer quality	Cat5e / Class D
Impedance	100 Ohm
Quantity of wires	8
Conductor cross section (AWG)	AWG 26
Inner conductor material	CCA (Copper Clad Aluminum)
Conductor type	Stranded
Crossed	no
Bend radius	36,8 mm
Assignment	1:1
Locking lever	no
Anti-kink sleeve	Moulded-on
Colour (Spout)	beige
External cable diameter	4,6 mm +/- 0,3 mm
Cable LSOH	no
Material (external cable mantle)	PVC
Side 1 Connector Type	RJ-45
Side 1 Connector Gender	Male
Side 2 Connector Type	RJ-45
Side 2 Connector Gender	Male
Connector Type RJ45	Standard
Height of packaging (single piece)	40 mm
Width of packaging (single piece)	100 mm
Depth of packaging (single piece)	100 mm

Package weight (single piece)	0.05 kg
-------------------------------	---------