


ROLINE Cable USB4 2.0, Flat, Straight-90° Angled, with Emark, C-C, M/M, 8K UHD-2, 80Gbit/s, 240W, black, 0.8 m

Product No.	11.02.9098
Manufacturer	ROLINE
Manufacturer No.	11.02.9098
EAN (single piece)	7630049641051

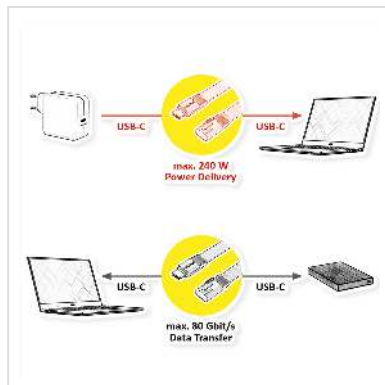

High-quality full-featured USB4 2.0 Cable with the reversible USB Type-C connector on both ends for data transfer rates of up to 80 Gbit/s and USB Power Delivery up to 240 W (48V / 5A).

- Full-featured USB4 2.0 Cable
- Very flexible thanks to the TPE cable jacket
- With the reversible Type-C connector at both ends
- Resolution up to single 8K@60Hz or dual 4K@60Hz
- Suitable for data transfer rates of up to 80 Gbit/s
- Supports USB Power Delivery up to 240 W (48V / 5A)
- Flat design
- Straight-90° Angled

The major benefits of the USB4 includes faster transfer speeds (up to 40 Gbit/s), a better management of video bandwidth (using a process called "protocol tunneling" that sends DisplayPort, PCIe and USB packets at the same time while allocating bandwidth accordingly) and optional compatibility with Thunderbolt 3 products.

Technical specifications

Manufacturer	ROLINE
Product group	Cable

Product type	USB4 Cable
Colour	black
Length	0.8 m
Scope of delivery	USB4 cable
Transfer quality	USB4 2.0 80 Gbit/s
Connection ports	USB Type C (USB-C) Male / USB Type C (USB-C) Male
Side 1 Connector Type	USB Type C (USB-C)
Side 1 Connector Gender	Male
Side 2 Connector Type	USB Type C (USB-C)
Side 2 Connector Gender	Male
Colour (Cable)	black
Max. resolution	7680 x 4320 @60Hz (8K, UHD-2)
Maximum data transfer rate	80 Gbit/s
Area of application	External
Supported charging technology	USB-PD - USB Power Delivery Power Delivery 3.1
Power (max.)	240 W
Material (external cable mantle)	TPE
Operating temperature min.	0 °C
Height	9.5 mm
Width	12.2 mm
Depth	800 mm
Height of packaging (single piece)	20 mm
Width of packaging (single piece)	70 mm

Depth of packaging (single piece)	70 mm
--------------------------------------	-------

Package weight (single piece)	0.05 kg
----------------------------------	---------