


# ROLINE HDMI 8K Audio Extractor, LPCM 7.1

<b>Product No.</b>	14.01.3444
<b>Manufacturer</b>	ROLINE
<b>Manufacturer No.</b>	14.01.3444
<b>EAN (single piece)</b>	7630049632653

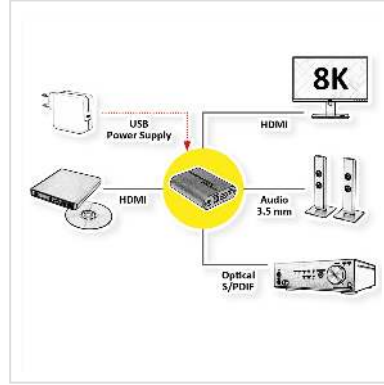

**This ROLINE HDMI 8K@60Hz Audio Extractor allows you to uncouple the audio signal from the HDMI signal. Not all monitors have good speakers. With this extractor you can redirect the audio signal via S/PDIF (optical) or analog via the 3.5mm port to a speaker system and the pure image signal goes to the screen.**

This ROLINE HDMI 8K@60Hz Audio Extractor allows you to uncouple the audio signal from the HDMI signal.

- Maximum resolution: 8K@60Hz
- Maximum bandwidth: 40Gbps
- Supports HDMI 2.1
- Supports HDCP 2.3
- Audio output supports 4 EDID selection modes (2CH/5.1CH/7.1CH/TV)
- HDMI frequency support: LPCM up to 7.1 192 KHz 24Bit
- S/PDIF TOSLINK output: LPCM up to 5.1 96KHz 24 Bit
- Stereo RCA output format: PCM 2.0 CH
- Contents: extractor, USB cable (A-C), user manual

## Technical specifications

Manufacturer	ROLINE
Product group	Adapters, Terminators, Converters

Product type	HDMI Audio Extractor
Colour	black
Scope of delivery	Extractor, USB cable (A-C), user manual
Max. resolution	7680 x 4320 @60Hz (8K, UHD-2)
Side 1 connection (PC)	HDMI
Side 2 connection (Peripherals)	HDMI, Optical S/PDIF, 3.5mm
Side 1 Connector Type	HDMI Type A
Side 1 Connector Gender	Female
Side 2 Connector Type	HDMI Type A Mini Phone Stereo 3.5 mm, 3-pin Toslink
Side 2 Connector Gender	Female
Area of application	External
Dimensions (HxWxD)	24 x 70 x 90 mm
Operating temperature min.	0 °C
Operating temperature max.	40 °C
Storage temperature min.	-20 °C
Storage temperature max.	60 °C
Height	24 mm
Width	70 mm
Depth	90 mm
Weight	106 g
Height of packaging (single piece)	30 mm
Width of packaging (single piece)	190 mm

---

Depth of packaging (single piece)	150 mm
--------------------------------------	--------

Package weight (single piece)	0.15 kg
----------------------------------	---------