
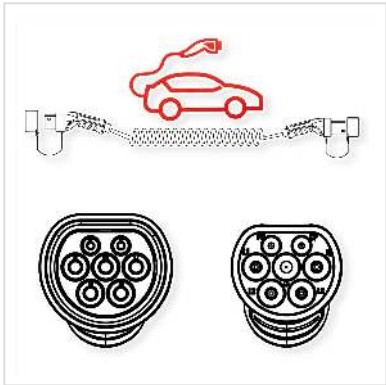


ROLINE EV Charging Cable Assembly Type2, 3-Phase, 480VAC (3P+N+E), 32 A, 22 kW, spiral, 5 m

| | | |
|--------------------|---------------|--|
| Product No. | 19.08.0055 |  Designed for Professionals |
| Manufacturer | ROLINE | |
| Manufacturer No. | 19.08.0055 | |
| EAN (single piece) | 7630049628229 | |



Type2 charging cable for electric and hybrid cars with 22 kW, 3-phase, 480 V AC

- Enables easy / fast charging at public charging stations and private wall boxes (wallbox)
- Suitable for charging electric and hybrid vehicles
- Mode 3 / Type 2 car charging cable
- Connections: Type 2 on both sides
- For all electric cars with type 2 connection
- Ergonomically shaped plug and coupler
- Moisture protection (IP65 - connected state, IP54 - unconnected cable with protective caps attached)
- Spiral, max. usable length 3 m
- 32 A / 3- phase (480 VAC)
- Max. Charging power: 22 kW

| Technical specifications | |
|--------------------------|-----------------------------|
| Manufacturer | ROLINE |
| Product group | Power Cables |
| Product type | Electric car charging cable |
| Colour | black |
| Length | 5 m |

| | |
|------------------------------------|--|
| Scope of delivery | E-car charging cable, carrying bag |
| Charging power | 22 kW |
| Current | 32 A |
| Number of phases | 3-phase |
| Supported charging technology | Mode-3 |
| Side 1 Connector Type | IEC 62196-2 Type 2 (VDE-AR-E 2623-2-2) |
| Side 1 Connector Gender | Male |
| Side 2 Connector Type | IEC 62196-2 Type 2 (VDE-AR-E 2623-2-2) |
| Side 2 Connector Gender | Female |
| Cable LSOH | flame retardant |
| Protection class (IP Code) | IP65 IP54 |
| Technical particularity | spiral, max. usable length 3 m |
| Mains connection | IEC 62196-2 Type 2 plug, 3Ph. |
| Operating temperature min. | -30 °C |
| Operating temperature max. | 50 °C |
| Storage temperature min. | -40 °C |
| Storage temperature max. | 85 °C |
| Height | 40 mm |
| Width | 390 mm |
| Depth | 390 mm |
| Weight | 2.6 kg |
| Height of packaging (single piece) | 100 mm |

| | |
|--------------------------------------|--------|
| Width of packaging (single piece) | 370 mm |
| Depth of packaging (single piece) | 370 mm |
| Package weight (single piece) | 3 kg |