


ROLINE Outdoor S/FTP Patch Cord Cat.6A / Class EA, Stranded, TPE, LSOH, black, 1 m

Product No.	21.15.0751
Manufacturer	ROLINE
Manufacturer No.	21.15.0751
EAN (single piece)	7630049627468

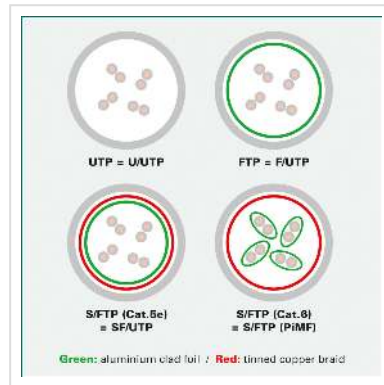

Assembled double shielded (PiMF) twisted pair cable category 6A with shielded RJ-45 connectors on both sides. For outdoor use (cable routing), e.g. for connecting an IP camera.

Patch cord for networking connections between devices in combination with outdoor application (e.g. connection to outdoor surveillance cameras)

- Prepared double shielded Twisted Pair cable with screened RJ-45 connectors on both ends
- Durable due to moulded kink protection
- Suitable for PoE applications and multimedia applications where the extension is working over TP
- High quality plugs with gold plated contacts
- UV - resistant (Ultraviolet resistance - ability of the material to withstand the degradation that can be caused by exposure to ultraviolet light)
- Contact settings 1:1, in accordance with the EIA/TIA 568 standard
- Construction: 4-pair stranded copper wire, complete braid shielding, pairs shielded with aluminium foil

REMARK: NOT suitable for underground installation / application

Technical specifications

Manufacturer	ROLINE
Product group	Twisted Pair Cable
Product type	S/FTP patch cord (PiMF)
Colour	black
Length	1 m
Shield type	S/FTP (PiMF)
Transfer quality	Cat6A / Class EA
Quantity of wires	8
Conductor cross section (AWG)	AWG 26
Power over Ethernet (PoE)	yes
Conductor type	Stranded
Crossed	no
Bend radius	Min. 25mm
Locking lever	yes
Anti-kink sleeve	Moulded-on
External cable diameter	6.0 +/-0.2mm
Cable LSOH	yes
Material (external cable mantle)	TPE
Side 1 Connector Type	RJ-45
Side 1 Connector Gender	Male
Side 2 Connector Type	RJ-45
Side 2 Connector Gender	Male
Connector Type RJ45	Standard
Operating temperature min.	-40 °C

Operating temperature max.	60 °C
-------------------------------	-------

Storage temperature min.	-40 °C
-----------------------------	--------

Storage temperature max.	75 °C
-----------------------------	-------

Weight	36.8 g
--------	--------

Height of packaging (single piece)	10 mm
---------------------------------------	-------

Width of packaging (single piece)	110 mm
--------------------------------------	--------

Depth of packaging (single piece)	110 mm
--------------------------------------	--------

Package weight (single piece)	0.045 kg
----------------------------------	----------