
ROLINE UTP Cable Cat.6 Component Level, LSOH, white, 0.3 m

| Product No. | |
|--------------------|--|
| Manufacturer | |
| Manufacturer No. | |
| EAN (single piece) | |

21.15.2946 ROLINE 21.15.2946 7611990171002



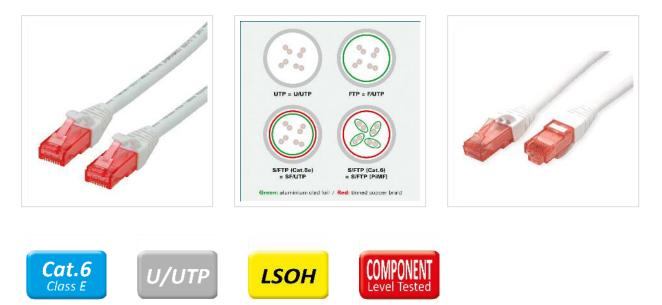

Patch cable for networking connections between devices. Prepared unshielded Twisted Pair cable with RJ-45 connectors on both ends. Durable due to moulded kink protection. Flexible cable, suitable for narrow bending. High quality plugs with gold plated contacts. Contact settings 1:1, in accordance with the EIA/TIA 568 standard. Construction: 4-pair stranded copper wire. Halogen-free, flame retardant, low smoke.

100 % Component level testing

| Technical specifications | | |
|--------------------------|--------------------|--|
| Manufacturer | ROLINE | |
| Product group | Twisted Pair Cable | |
| Product type | UTP Patch Cables | |
| Colour | white | |
| Length | 0.3 m | |
| Shield type | UTP | |
| Transfer quality | Cat6 / Class E | |

| Component-Level certified | yes |
|---------------------------------------|------------|
| Impedance | 100 Ohm |
| Conductor cross section (AWG) | AWG 24 |
| Conductor type | Stranded |
| Crossed | no |
| Locking lever | yes |
| Anti-kink sleeve | Moulded-on |
| Colour (Spout) | white |
| Cable LSOH | yes |
| Side 1 Connector Type | RJ-45 |
| Side 1 Connector Gender | Male |
| Side 2 Connector Type | RJ-45 |
| Side 2 Connector Gender | Male |
| Connector Type RJ45 | Standard |
| Weight | 19.4 g |
| Height of packaging (single piece) | 20 mm |
| Width of packaging (single piece) | 140 mm |
| Depth of packaging (single piece) | 170 mm |
| Package weight (single piece) | 0.04 kg |
| | |