


ROLINE S/FTP Patch Cord Cat. 8.1 (Class I), LSOH, Slim, PoE, green, 0.5 m

Product No.	21.15.3430
Manufacturer	ROLINE
Manufacturer No.	21.15.3430
EAN (single piece)	7630049638693

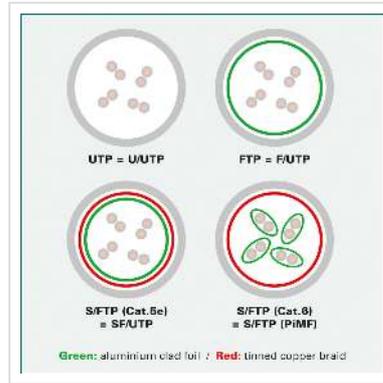

High-quality, slim and double shielded Category 8.1 (Class I) Patch Cord with screened RJ-45 connectors on both ends - for data rates of up to 40 gigabits per second. Moreover, this patch cord is halogen-free, flame-retardant and low-smoke (LSOH) and also suitable for PoE.

- Double shielded Cat. 8.1 (Class I) patch cord with screened RJ-45 connectors on both ends
- Bare copper wires
- Supports PoE
- Suitable for 40 Gigabit Ethernet networks
- High-quality gold-plated contacts
- Halogen-free, flame-retardant and low-smoke (LSOH)
- Durable thanks to molded kink protection
- Contact settings 1:1, in accordance with the EIA/TIA 568 standard
- Construction: 8-wire stranded cable, pairs foil-shielded, overall shielding braid
- Slim thanks to a small outer cable diameter of only $4.5 \pm 0.2\text{mm}$

Technical specifications

Manufacturer	ROLINE
Product group	Twisted Pair Cable

Product type	S/FTP patch cord (PiMF)
Colour	green
Length	0.5 m
Scope of delivery	Patchcord
Shield type	S/FTP (PiMF)
Transfer quality	Cat8.1 / Class I
Impedance	100 Ohm
Quantity of wires	8
Conductor cross section (AWG)	AWG 28
Power over Ethernet (PoE)	yes
Conductor type	Stranded
Crossed	no
Slim cable	yes
Bend radius	27 mm
Assignment	EIA/TIA 568B
Locking lever	yes
Anti-kink sleeve	Moulded-on
External cable diameter	4.5 mm +/- 0.2 mm
Cable LSOH	yes
Material (external cable mantle)	TPE
Side 1 Connector Type	RJ-45
Side 1 Connector Gender	Male
Side 2 Connector Type	RJ-45
Side 2 Connector Gender	Male
Connector Type RJ45	Standard

Operating temperature min.	-10 °C
-------------------------------	--------

Operating temperature max.	60 °C
-------------------------------	-------

Storage temperature min.	-20 °C
-----------------------------	--------

Storage temperature max.	75 °C
-----------------------------	-------

Weight	15.1 g
--------	--------

Height of packaging (single piece)	10 mm
---------------------------------------	-------

Width of packaging (single piece)	60 mm
--------------------------------------	-------

Depth of packaging (single piece)	60 mm
--------------------------------------	-------

Package weight (single piece)	0.02 kg
----------------------------------	---------