


# ROLINE S/FTP Patch Cord Cat.6A / Class EA, LSOH, Slim, PoE, red, 10 m

|                    |               |                                                                                                                  |
|--------------------|---------------|------------------------------------------------------------------------------------------------------------------|
| Product No.        | 21.15.4307    | <br>Designed for Professionals |
| Manufacturer       | ROLINE        |                                                                                                                  |
| Manufacturer No.   | 21.15.4307    |                                                                                                                  |
| EAN (single piece) | 7630049638006 |                                                                                                                  |

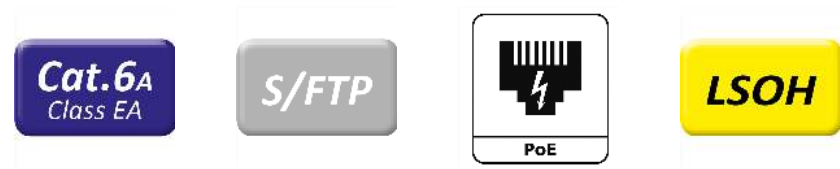

**S/FTP (PiMF) Cat. 6A LSOH Patch Cord with shielded RJ-45 connectors on both sides. PoE-capable although it is slim, flexible and tangle-free.**

- S/FTP (PiMF) LSOH Cat. 6A Patch Cord
- For use in 10-Gigabit Ethernet networks, especially for connecting devices (e.g. IP cameras)
- Slim, flexible and tangle-free
- Suitable for PoE applications and multimedia applications where the extension is working over TP
- High quality plugs with gold plated contacts
- Durable due to moulded kink protection
- Contact settings 1:1, in accordance with the EIA/TIA 568 standard
- Construction: 4-pair stranded copper wire, complete braid shielding, pairs shielded with aluminium foil

| Technical specifications |                         |
|--------------------------|-------------------------|
| Manufacturer             | ROLINE                  |
| Product group            | Twisted Pair Cable      |
| Product type             | S/FTP patch cord (PiMF) |

|                               |                  |
|-------------------------------|------------------|
| Colour                        | red              |
| Length                        | 10 m             |
| Scope of delivery             | Patch Cord       |
| Shield type                   | S/FTP (PiMF)     |
| Transfer quality              | Cat6A / Class EA |
| Quantity of wires             | 8                |
| Conductor cross section (AWG) | AWG 28           |
| Power over Ethernet (PoE)     | yes              |
| Conductor type                | Stranded         |
| Slim cable                    | yes              |
| Bend radius                   | Min. 27 mm       |
| Locking lever                 | yes              |
| Anti-kink sleeve              | Moulded-on       |
| Colour (Spout)                | red              |
| External cable diameter       | 4.5 +/-0.2mm     |
| Cable LSOH                    | yes              |
| Side 1 Connector Type         | RJ-45            |
| Side 1 Connector Gender       | Male             |
| Side 2 Connector Type         | RJ-45            |
| Side 2 Connector Gender       | Male             |
| Connector Type RJ45           | Standard         |
| Operating temperature min.    | -10 °C           |
| Operating temperature max.    | 60 °C            |
| Storage temperature min.      | -20 °C           |

|                                    |         |
|------------------------------------|---------|
| Storage temperature max.           | 75 °C   |
| Weight                             | 201 g   |
| Height of packaging (single piece) | 30 mm   |
| Width of packaging (single piece)  | 200 mm  |
| Depth of packaging (single piece)  | 200 mm  |
| Package weight (single piece)      | 0.25 kg |