


ROLINE S/FTP Patch Cord Cat.6A / Class EA, LSOH, Slim, PoE, blue, 0.3 m

Product No.	21.15.4348
Manufacturer	ROLINE
Manufacturer No.	21.15.4348
EAN (single piece)	7630049638198

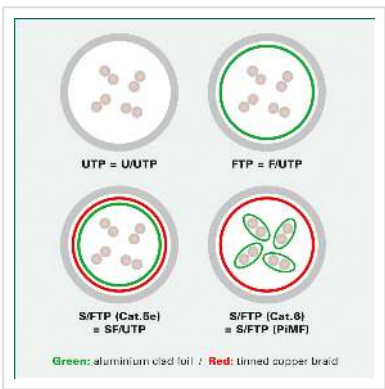

Cat.6A
Class EA

S/FTP

PoE

LSOH

S/FTP (PiMF) Cat. 6A LSOH Patch Cord with shielded RJ-45 connectors on both sides. PoE-capable although it is slim, flexible and tangle-free.

- S/FTP (PiMF) LSOH Cat. 6A Patch Cord
- For use in 10-Gigabit Ethernet networks, especially for connecting devices (e.g. IP cameras)
- Slim, flexible and tangle-free
- Suitable for PoE applications and multimedia applications where the extension is working over TP
- High quality plugs with gold plated contacts
- Durable due to moulded kink protection
- Contact settings 1:1, in accordance with the EIA/TIA 568 standard
- Construction: 4-pair stranded copper wire, complete braid shielding, pairs shielded with aluminium foil

Technical specifications	
Manufacturer	ROLINE
Product group	Twisted Pair Cable
Product type	S/FTP patch cord (PiMF)

Colour	blue
Length	0.3 m
Scope of delivery	Patch Cord
Shield type	S/FTP (PiMF)
Transfer quality	Cat6A / Class EA
Quantity of wires	8
Conductor cross section (AWG)	AWG 28
Power over Ethernet (PoE)	yes
Conductor type	Stranded
Slim cable	yes
Bend radius	Min. 27 mm
Locking lever	yes
Anti-kink sleeve	Moulded-on
Colour (Spout)	blue
External cable diameter	4.5 +/-0.2mm
Cable LSOH	yes
Side 1 Connector Type	RJ-45
Side 1 Connector Gender	Male
Side 2 Connector Type	RJ-45
Side 2 Connector Gender	Male
Connector Type RJ45	Standard
Operating temperature min.	-10 °C
Operating temperature max.	60 °C
Storage temperature min.	-20 °C

Storage temperature max.	75 °C
Weight	11.9 g
Height of packaging (single piece)	10 mm
Width of packaging (single piece)	200 mm
Depth of packaging (single piece)	200 mm
Package weight (single piece)	0.015 kg