


# VALUE Dockingstation Type C, 1x HDMI 4K30, 1x VGA 1080p, 1x Gigabit Ethernet, 3x USB 3.2 Gen1 (A), 1x USB 2.0 (C), 1x SD/TF, 1x Audio, 1x Type C PD (Power Delivery)

<b>Product No.</b>	12.99.1143
<b>Manufacturer</b>	VALUE
<b>Manufacturer No.</b>	12.99.1143
<b>EAN (single piece)</b>	7630049640771

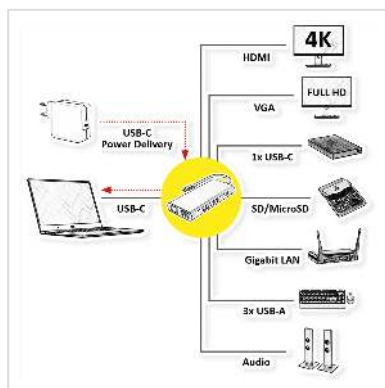

**Connect your Macbook, Ultrabook, Notebook/Laptop or PC with USB Type C interface to HDMI (3840x2160@30Hz) or VGA (1080p) displays/monitor or projectors. Also, you can connect USB devices to the additional 4 USB Ports (3x A, 1x C), while charging your device simultaneously over the Type C PD port!**

- Connect your device with USB Type C port to a HDMI or VGA display/monitor or projector
- 1x HDMI (3840x2160 @30Hz) and 1x VGA (1920x1080 @60Hz)
- 1x Gigabit Ethernet (GbE - 1000MBit/s)
- 3x USB-A 3.2 Gen 1 (5Gbit/s) + 1x USB-C 2.0 (480Mbit/s)
- SD/Micro SD (TF) Card Reader (cannot be supported at the same time)
- 1x 3.5mm Audio Out
- USB Type C PD (Power Delivery) up to 100 Watts
- No power adapter required

**Remark: Support of "Alternate Mode (DP Alt Mode)" required**

Note: According to the current specifications of USB.org we have adapted the technical data of our USB 3 products. The new designation for the already known USB specifications has been changed to USB 3.2 Gen 1 (formerly USB 3.0 / USB 3.1 Gen 1) and USB 3.2 Gen 2 (formerly USB 3.1 / USB 3.1 Gen 2).

## Technical specifications

Manufacturer	VALUE
Product group	Adapters, Terminators, Converters
Product type	Notebook-Docking-Station
Colour	grey
Length	0.1 m
Scope of delivery	Docking Station
Max. resolution	3840 x 2160 @30Hz (4K, Full HD)
Side 1 connection (PC)	USB Type C
Side 2 connection (Peripherals)	1x HDMI 4K30, 1x VGA 1080p, 1x Gigabit Ethernet, 3x USB 3.2 Gen1 (A), 1x USB 2.0 (C), 1x SD/MicroSD (TF), 1x Audio Out, 1x Type C PD (Power Delivery)
Side 1 Connector Type	USB Type C (USB-C)
Side 1 Connector Gender	Male
Side 2 Connector Type	HDMI Type A HD D-Sub 15-pin (HD-15), VGA USB 3 Type A USB Type C (USB-C) USB Type C PD (Power Delivery) RJ-45 SD-Card-Slot MicroSD-Card-Slot
Side 2 Connector Gender	Female
Area of application	External
Dimensions (HxWxD)	17 x 56 x 119 mm
Technical particularity	Power Delivery Function (100W)
Height	17 mm
Width	56 mm
Depth	119 mm
Weight	91 g

---

Height of packaging (single piece)	10 mm
---------------------------------------	-------

Width of packaging (single piece)	120 mm
--------------------------------------	--------

Depth of packaging (single piece)	170 mm
--------------------------------------	--------

Package weight (single piece)	0.1 kg
----------------------------------	--------