


VALUE HDMI Splitter, 1x4, 4K60Hz

Product No.	14.99.3584
Manufacturer	VALUE
Manufacturer No.	14.99.3584
EAN (single piece)	7630049633308

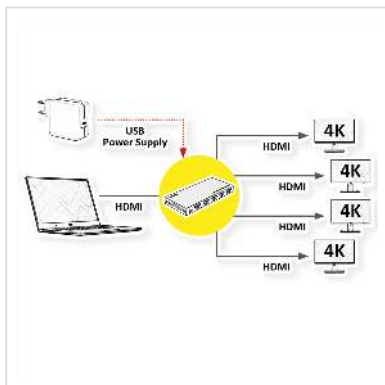

2160p
UHD-1

4K

3D
capable

This 4K@60Hz HDMI Splitter 1x4 allows you to share up to four HDMI displays or projectors with an HDMI-enabled audio/video source device. It is backwards compatible with previous HDMI revisions and therefore also supports HDMI devices with 1080p / 720p video resolution. It has three different EDID modes: Auto/Copy/Downscaler.

- Outputs a HDMI video signal to up to four HDMI video signals with a resolution of up to 4K@60Hz
- Connectors: 1 HDMI Input (e.g. DVD-player) and 4 HDMI outputs
- Supports max. 3840 x 2160 @60Hz
- Plug & play, easy to install and simple to operate
- No software installation required

**High resolution up to 4K@60Hz YUV 4:4:4 and full 3D video format
HDCP 2.2 and HDCP 1.4 / High Dynamic Range (HDR) video.**

600MHz/6Gbps per channel (18Gbps all channels) bandwidth / 12bit per channel (36bit all channels) deep color.

Uncompressed audio such as LPCM.

Compressed audio such as DTS, Dolby Digital (including DTS-HD Master Audio™ and Dolby Tru

3 different EDID modes - Auto/Copy/Downscaler.

1. Normal Auto EDID Mode:
Retrieves the lower resolution and audio format of both outputs for the input device to output that signal to both outputs.
2. Copy EDID Mode:
Copies the resolution and audio format of output 1 for the input device to output that signal to both outputs.
3. Downscaler EDID Mode:
Mixed resolutions are supported. For two screens with same refresh rates, but different resolutions, one of the two output signals can be downscaled from 4K to 1080p.

Technical specifications	
Manufacturer	VALUE
Product group	Splitters and selectors
Product type	HDMI-Video-Splitter
Colour	black
Scope of delivery	Splitter, Manual, USB power supply cable
Interface	HDMI
Inputs	1
Outputs	4
Video input	1x HDMI Female
Video output	4x HDMI Female
Max. resolution (nom.)	3840 x 2160 @60Hz
Max. resolution	3840 x 2160 @60Hz (4K, UHD-1)
Dimensions (HxWxD)	14 x 136 x 61 mm
Operating temperature min.	0 °C
Operating temperature max.	70 °C
Height	14 mm
Width	136 mm
Depth	61 mm

Weight	180 g
Height of packaging (single piece)	50 mm
Width of packaging (single piece)	120 mm
Depth of packaging (single piece)	180 mm
Package weight (single piece)	0.3 kg