


# VALUE FTP Cable Cat.5e (Class D), Solid Wire, grey, 300 m

<b>Product No.</b>	21.99.0196
<b>Manufacturer</b>	VALUE
<b>Manufacturer No.</b>	21.99.0196
<b>EAN (single piece)</b>	7611990148431

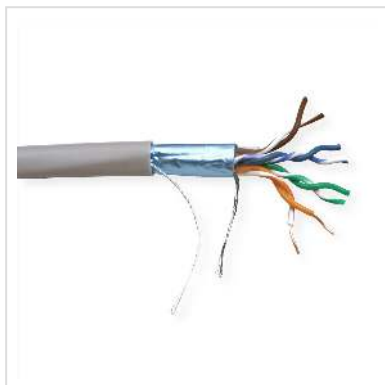

- Structured building wiring
- Impedance: 100 Ohm
- Length: 300 m
- Colour: Grey
- Construction: 8 lines, copper, solid wire, complete shielding with aluminium clad polyester foil

For a structured cabling system we recommend to use the following components:

VALUE Cat.5e FTP Cable, Solid Wire, 300 m: 21.99.0196

ROLINE Cat.5e Flush/Surface Mount Wall Jack, shielded: 25.16.8487 (white),  
25.16.8486(ivory)/25.16.8387 (white), 25.16.8386 (ivory)

VALUE Cat.5e 19" Patch Panel, 24 Ports, shielded: 26.99.0328 (black), 26.99.0329 (light grey)

VALUE Cat.5e FTP Patch Cord, grey, 5 m: 21.99.0105

Our in-house laboratory has tested this cable-plug combination, in a Channel of 100 meters, in compliance with Class D specifications.

## Technical specifications

Manufacturer	VALUE
Product group	Twisted Pair Cable
Product type	Installation cable
Colour	grey
Length	300 m
Contents	300 m
Shield type	FTP
Transfer quality	Cat5e / Class D
Impedance	100 Ohm
Quantity of wires	8
Conductor type	Solid wire
Cable LSOH	no
Material (external cable mantle)	PVC
Fire protection class	Eca
Weight	10494 g
Height of packaging (single piece)	250 mm
Width of packaging (single piece)	410 mm
Depth of packaging (single piece)	420 mm
Package weight (single piece)	12.7 kg