


VALUE S/FTP Patch Cord Cat.6A (Class EA), black, 7 m

| | |
|--------------------|---------------|
| Product No. | 21.99.1966 |
| Manufacturer | VALUE |
| Manufacturer No. | 21.99.1966 |
| EAN (single piece) | 7611990123964 |

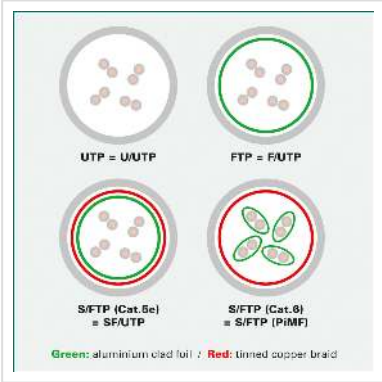

The cheap solution for data transfer rates of up to 10 Gbit/s and a bandwidth of 500 MHz. Patch cable for networking connections between devices. Prepared shielded Twisted Pair cable (PiMF) with RJ-45 connectors on both ends. Durable due to moulded kink protection. Flexible cable, suitable for narrow bending. Impedance: 100 Ohm. Contact settings 1:1, in accordance with the EIA/TIA 568 standard. Construction: 8 lines, pairs shielded with aluminium foil, complete braided shielding.

For a structured shielded Cat.6a cabling system we recommend to use the following components:

- VALUE Cat.6a S/FTP Cable, Solid Wire, 100 m: 21.99.0881.
- Flush Mount Wall Jack for Keystones: 25.16.8579.
- Surface Wall Mount Frame: 25.16.8484.
- VALUE Cat.6a Keystone, RJ-45, shielded: 26.99.0366.
- 19" Keystone Patch Panel: 26.11.0359.
- VALUE Cat.6a S/FTP Patch Cord, 5 m: 21.99.0865.

| Technical specifications | |
|--------------------------|--------------------|
| Manufacturer | VALUE |
| Product group | Twisted Pair Cable |

| | |
|------------------------------------|------------------|
| Product type | S/FTP Patchcord |
| Colour | black |
| Length | 7 m |
| Shield type | SFTP |
| Transfer quality | Cat6A / Class EA |
| Quantity of wires | 8 |
| Conductor cross section (AWG) | AWG 27 |
| Conductor type | Stranded |
| Crossed | no |
| Locking lever | yes |
| Anti-kink sleeve | Moulded-on |
| Colour (Spout) | black |
| Cable LSOH | yes |
| Side 1 Connector Type | RJ-45 |
| Side 1 Connector Gender | Male |
| Side 2 Connector Type | RJ-45 |
| Side 2 Connector Gender | Male |
| Connector Type RJ45 | Standard |
| Weight | 204 g |
| Height of packaging (single piece) | 40 mm |
| Width of packaging (single piece) | 140 mm |
| Depth of packaging (single piece) | 190 mm |
| Package weight (single piece) | 0.24 kg |