


# VALUE FO Jumper Cable 50/125µm OM3, LC/LC, Low-Loss-Connector, turquoise, 5 m

Product No.	21.99.8824
Manufacturer	VALUE
Manufacturer No.	21.99.8824
EAN (single piece)	7630049616813

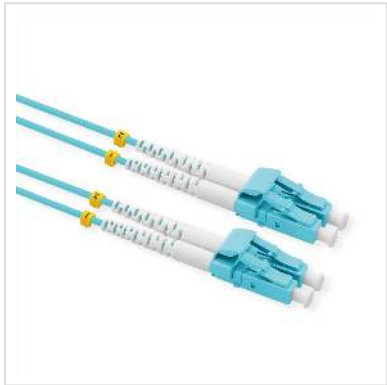

## VALUE fiber optic low-loss patch cord in OM3 quality for high-performance fiber optic cabling

- Security for the future! The OM3 fiber and connector quality with very low insertion loss ensure an excellent quality at very high bandwidths.
- The cable assembled with "low-loss" connectors achieve very good values for insertion loss and reflection. In comparison:
  - Typical attenuation of a standard LC connector: 0.5 dB
  - Typical attenuation of a low-loss LC connector: 0.15 dB
- Duplex cables with fiber type Multi-mode 50/125µm, OM3
- Color: turquoise

Technical specifications	
Manufacturer	VALUE
Product group	Fibre optic cable
Product type	Fibre Optic Jumper Cables OM3
Colour	turquoise
Length	5 m

Quantity of fibre	2
Conductor composition	Compact conductor
Cable type	Duplex Cable
External cable	no
Fibre section	Multi mode 50/125µm OM3
Connection ports	LC / LC
Side 1 Connector Type	LC
Side 2 Connector Type	LC
Min. Bending radius, static	20 mm
Min. Bending radius, dynamic	40 mm
Colour (Cable)	turquoise
Aramid strain relief	yes
External cable diameter	2 x 4 mm
Mantle of external cable	LSOH
Cable LSOH	yes
Flame retardant according to IEC 60332- 1-2	yes
Low smoke according to IEC 61034-2	yes
Halogen free according to IEC 60754-2	yes
Max. insertion loss	0.15 dB
Min. return loss	30 dB
Weight	42.1 g
Height of packaging (single piece)	10 mm
Width of packaging (single piece)	80 mm

Depth of packaging (single piece)	80 mm
--------------------------------------	-------

Package weight (single piece)	0.02 kg
----------------------------------	---------