


# ROLINE RM S/FTP (PiMF) Patch Cord Cat.6A, red, 7 m

|                    |                          |
|--------------------|--------------------------|
| Product No.        | 21.45.3216               |
| Manufacturer       | ROLINE RECYCLED MATERIAL |
| Manufacturer No.   | 21.45.3216               |
| EAN (single piece) | 7630049631342            |

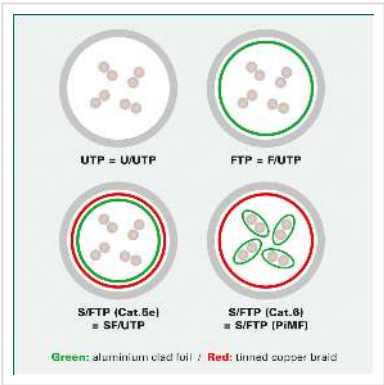

The patch cables in the **ROLINE RECYCLED MATERIAL** product line with shielded **RJ-45** connectors are ideal for **10 Gigabit Ethernet** networks. **Gold-plated contacts** and **moulded bend protection** ensure **durability** and **reliable performance**.

- Patch cable for networking connections between devices
- Prepared double shielded Twisted Pair cable with screened RJ-45 connectors on both ends
- Durable due to moulded kink protection
- Flexible cable, suitable for narrow bending
- High quality plugs with gold plated contacts
- Contact settings 1:1, in accordance with the EIA/TIA 568 standard
- Construction: 4-pair stranded copper wire
- Complete braid shielding. Pairs shielded with aluminium clad polyester foil

**ROLINE RECYCLED MATERIAL** products consist of more than **50% recycled materials**. The packaging is even made from **100% recycled material**.

| Technical specifications |                          |
|--------------------------|--------------------------|
| Manufacturer             | ROLINE RECYCLED MATERIAL |
| Product group            | Twisted Pair Cable       |
| Product type             | S/FTP Patchcord          |

|                                    |                  |
|------------------------------------|------------------|
| Colour                             | red              |
| Length                             | 7 m              |
| Shield type                        | SFTP             |
| Transfer quality                   | Cat6A / Class EA |
| Quantity of wires                  | 8                |
| Conductor cross section (AWG)      | AWG 26           |
| Conductor type                     | Stranded         |
| Crossed                            | no               |
| Locking lever                      | yes              |
| Anti-kink sleeve                   | Moulded-on       |
| Side 1 Connector Type              | RJ-45            |
| Side 1 Connector Gender            | Male             |
| Side 2 Connector Type              | RJ-45            |
| Side 2 Connector Gender            | Male             |
| Connector Type RJ45                | Standard         |
| Operating temperature min.         | -20 °C           |
| Operating temperature max.         | 75 °C            |
| Storage temperature min.           | -20 °C           |
| Storage temperature max.           | 80 °C            |
| Weight                             | 208.2 g          |
| Height of packaging (single piece) | 30 mm            |
| Width of packaging (single piece)  | 150 mm           |

|                                      |         |
|--------------------------------------|---------|
| Depth of packaging<br>(single piece) | 150 mm  |
| Package weight (single<br>piece)     | 0.23 kg |