


ROLINE RM S/FTP (PiMF) Patch Cord Cat.6A, white, 2m

| | |
|--------------------|--------------------------|
| Product No. | 21.45.3262 |
| Manufacturer | ROLINE RECYCLED MATERIAL |
| Manufacturer No. | 21.45.3262 |
| EAN (single piece) | 7630049631861 |

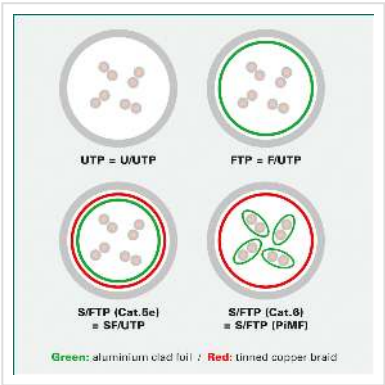

Cat.6A
Class EA

S/FTP

The patch cables in the **ROLINE RECYCLED MATERIAL** product line with shielded RJ-45 connectors are ideal for 10 Gigabit Ethernet networks. Gold-plated contacts and moulded bend protection ensure durability and reliable performance.

- Patch cable for networking connections between devices
- Prepared double shielded Twisted Pair cable with screened RJ-45 connectors on both ends
- Durable due to moulded kink protection
- Flexible cable, suitable for narrow bending
- High quality plugs with gold plated contacts
- Contact settings 1:1, in accordance with the EIA/TIA 568 standard
- Construction: 4-pair stranded copper wire
- Complete braid shielding. Pairs shielded with aluminium clad polyester foil

ROLINE RECYCLED MATERIAL products consist of more than 50% recycled materials. The packaging is even made from 100% recycled material.

| Technical specifications | |
|--------------------------|--------------------------|
| Manufacturer | ROLINE RECYCLED MATERIAL |
| Product group | Twisted Pair Cable |

| | |
|------------------------------------|------------------|
| Product type | S/FTP Patchcord |
| Colour | white |
| Length | 2 m |
| Shield type | SFTP |
| Transfer quality | Cat6A / Class EA |
| Quantity of wires | 8 |
| Conductor cross section (AWG) | AWG 26 |
| Conductor type | Stranded |
| Crossed | no |
| Locking lever | yes |
| Anti-kink sleeve | Moulded-on |
| Side 1 Connector Type | RJ-45 |
| Side 1 Connector Gender | Male |
| Side 2 Connector Type | RJ-45 |
| Side 2 Connector Gender | Male |
| Connector Type RJ45 | Standard |
| Operating temperature min. | -20 °C |
| Operating temperature max. | 75 °C |
| Storage temperature min. | -20 °C |
| Storage temperature max. | 80 °C |
| Weight | 66.5 g |
| Height of packaging (single piece) | 20 mm |
| Width of packaging (single piece) | 100 mm |

| | |
|--------------------------------------|----------|
| Depth of packaging (single piece) | 100 mm |
| Package weight (single piece) | 0.075 kg |