


# ROLINE RM U/FTP DataCenter Patch Cord Cat.6A (Class EA), slim, blue, 0.5 m

|                    |                          |
|--------------------|--------------------------|
| Product No.        | 21.45.3342               |
| Manufacturer       | ROLINE RECYCLED MATERIAL |
| Manufacturer No.   | 21.45.3342               |
| EAN (single piece) | 7630049630178            |

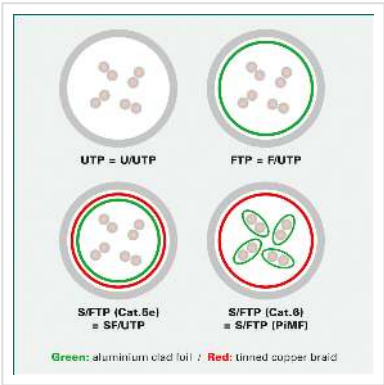

**Category 6a twisted-pair patch cable with shielded RJ-45 connectors on both sides. Particularly thin and flexible cable from our ROLINE Recycled Material product line with individual pairs of wires in aluminium-laminated foil for use in confined spaces, such as in data centres.**

- Durable thanks to moulded-on kink protection
- Suitable as patch cable in patch panels or as device connection cable and intended for use in the LAN
- Contact assignment: 1:1 according to EIA/TIA568, 8 cores
- Structure: 8 cores stranded wire, pairs shielded with alu-laminated foil

**ROLINE RECYCLED MATERIAL products consist of more than 50% recycled materials. The packaging is even made from 100% recycled material.**

| Technical specifications |                          |
|--------------------------|--------------------------|
| Manufacturer             | ROLINE RECYCLED MATERIAL |
| Product group            | Twisted Pair Cable       |
| Product type             | FTP Patch Cord           |

|                                    |                  |
|------------------------------------|------------------|
| Colour                             | blue             |
| Length                             | 0.5 m            |
| Shield type                        | FTP              |
| Transfer quality                   | Cat6A / Class EA |
| Quantity of wires                  | 8                |
| Conductor cross section (AWG)      | AWG 32           |
| Conductor type                     | Stranded         |
| Crossed                            | no               |
| Slim cable                         | yes              |
| Locking lever                      | yes              |
| Anti-kink sleeve                   | Moulded-on       |
| Side 1 Connector Type              | RJ-45            |
| Side 1 Connector Gender            | Male             |
| Side 2 Connector Type              | RJ-45            |
| Side 2 Connector Gender            | Male             |
| Connector Type RJ45                | Standard         |
| Operating temperature min.         | -20 °C           |
| Operating temperature max.         | 75 °C            |
| Storage temperature min.           | -20 °C           |
| Storage temperature max.           | 80 °C            |
| Weight                             | 12.8 g           |
| Height of packaging (single piece) | 10 mm            |
| Width of packaging (single piece)  | 20 mm            |

|                                      |       |
|--------------------------------------|-------|
| Depth of packaging<br>(single piece) | 50 mm |
|--------------------------------------|-------|

|                                  |         |
|----------------------------------|---------|
| Package weight (single<br>piece) | 0.02 kg |
|----------------------------------|---------|