



Datenblatt - Fiche technique - Data sheet

11.04.5599




ROLINE Monitorkabel DVI, ST-ST, (24+1) dual link, 20m

ROLINE Câble DVI pour écran, M-M, (24+1) dual link, 20m

ROLINE Monitor Cable, DVI (24+1), Dual Link, M/M, 20 m

ROHS-COMPLIANT

| REV. | DESCRIPTION | DATE |
|------|-----------------------------|-----------|
| C | ECR #111226-5 ADD LENGTH | 12/26/11' |

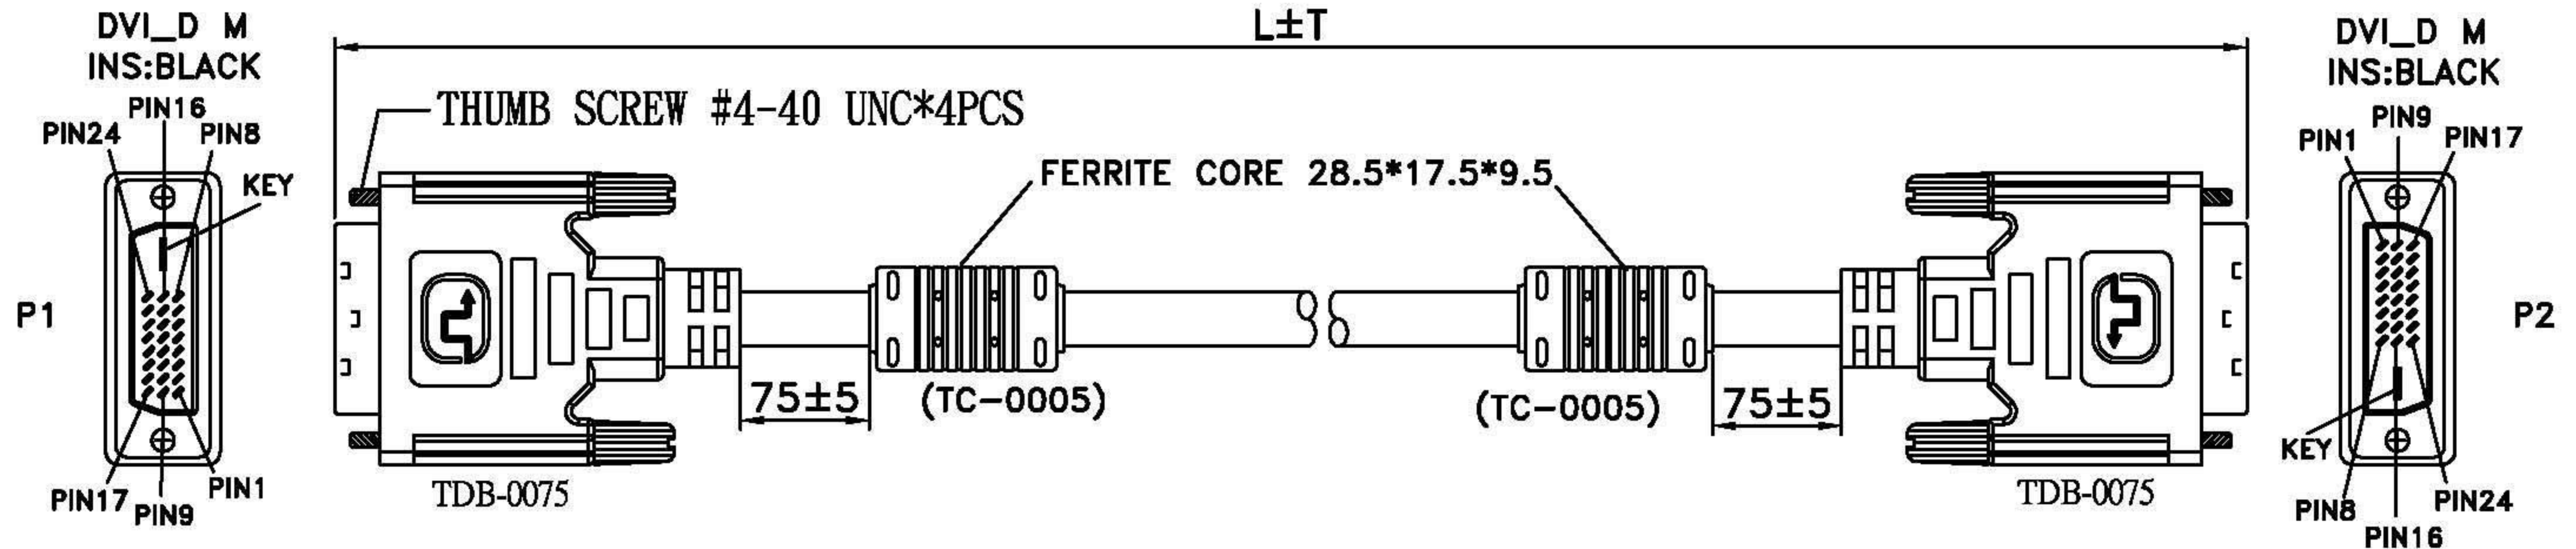

WIRE CONNECTION

| P1 | WIRE COLOR | P2 |
|-------|---------------|-------|
| 1 | | 1 |
| 2 | | 2 |
| 3 | | 3 |
| 3 | | 3 |
| 4 | | 4 |
| 5 | | 5 |
| 6 | | 6 |
| 7 | | 7 |
| 9 | | 9 |
| 10 | | 10 |
| 11 | | 11 |
| 11 | | 11 |
| 12 | | 12 |
| 13 | | 13 |
| 14 | | 14 |
| 15 | | 15 |
| 16 | | 16 |
| 17 | | 17 |
| 18 | | 18 |
| 19 | | 19 |
| 19 | | 19 |
| 20 | | 20 |
| 21 | | 21 |
| 22 | | 22 |
| 23 | | 23 |
| 24 | | 24 |
| SHELL | BRAID SHIELDS | SHELL |

REMARK:

- CABLE: UL-20276 [28AWG(7/0.127 T.C)*1P+DRAIN WIRE+AL/MY+MYLAR]*7C+28AWG(7/0.127 T.C)*1P+28AWG(7/0.127 T.C)*3C+AL/MYLAR+BRAID SHIELDS(85% T.C) PVC JACKET, OD: 8.6±0.15mm, COLOR:BLACK(NK-K01).
- CONNECTOR:
P1&P2:DVI_D 25P: 24P+KEY MALE, GOLD FLASH CONTACT, NICKEL PLATED SHELL.
- SHIELD: P1&P2 COPPER FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE SHIELDING
- HOOD:
P1&P2:MOLDED TYPE, PVC 45P, COLOR:BLACK(NK-K01)
- FERRITE CORE: (28.5*17.5*9.5) x 2
- TEST REQUEST:
(1) 100% SHORT OPEN & MIS WIRE TEST.
(2) CONTACT RESISTANCE 3 OHMS MAX.
(3) INSULATION RESISTANCE 10M OHMS MIN.
- PACKING: EACH PC / POLY BAG + HEADER CARD(ROLINE, SIZE:205*84mm) + P/N LABEL

| Tolerance | Inch | M/M |
|-----------|------|-----|
| .X | .015 | .30 |
| .XX | .010 | .10 |
| .XXX | .005 | .05 |

Draw
FANNIE 12/26/11'
Check
Engr

Rotronic Co., Ltd.

ROLINE DVI Cable, DVI M-M, dual link, 1m, black

Item No.: see the chart

Scale NONE Units m/m Third Angle Projection

REV:C Sheet 1/1

| | | | | |
|------------|-------|-------|----------|---------------|
| 11.04.5521 | 1000 | 20 | 25 | 7611990198108 |
| 11.04.5555 | 5000 | 50 | 10 | 7611990146062 |
| 11.04.5535 | 3000 | 30 | 20 | 7611990146055 |
| 11.04.5525 | 2000 | 30 | 25 | 7611990146048 |
| P/N | L(mm) | T(mm) | PCS /CTN | BAR CODE NO. |