



Datenblatt - Fiche technique - Data sheet

11.99.4385




VALUE Fiber-Kabel Toslink ST / ST, 5m

VALUE Câble Toslink M/M, 5m

VALUE Fiber Cable Toslink M - M, 5 m

5000±50mm

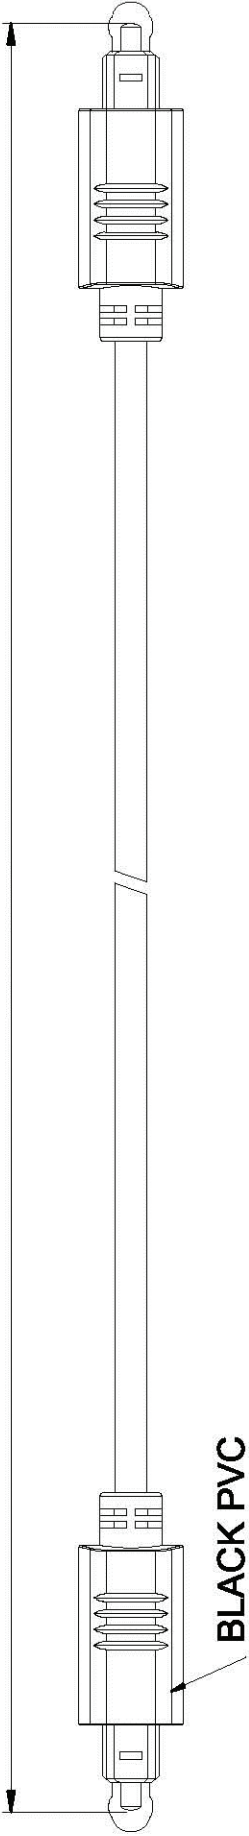

1. PLASTIC FIBER CORB (PMMA):OD=0.98mm
2. CLAD (FLUORD POLYMER) :OD=1.0mm
3. PRIMARY JACKET PE,OD=2.2 mm (BLACK)
4. OUTER JACKET PVC, BLACK IN COLOR, OD=4.0 mm




Chart A

NOTES:

1. Marking: Bewired Toslink Plastic Fiber 4.0mm PVC Black
2. CABLE: 4.0mm PLASTIC OPTICAL FIBER CABLE
3. CONNECTORS: TOSLINK TO TOSLINK
4. PACKING: 1PC PER PE BAG+ 1PC TAG
5. PERFORMANCE:
 - L ≤ 2M: ATTENUATION SHOULD BE 2.0dB OR LESS
 - L > 2M: ADD 0.2dB/M
 (TEST BY 650±30nm LED LIGHT SOURCE / POWER METER)

REV.	TOLERANCE INCHES	TOLERANCE M/M	DESCRIPTION	DATE
⊕				
.X	.015	.30		
.XX	.010	.10		
.XXX	.005	.05		
DRAWN BY	joe		CUSTOMER P/N :	11.99.4385
CHECK BY			SCALE	NONE
APPD BY			UNIT	MM
			DATE	12.05.30
			DRAWING NO.:	CA1790098
			REV. A	1/2

Rotronic Co., Ltd.

TITLE:

VALUE Toslink Cable M-M, 5.0m

CUSTOMER :

11.99.4385

SCALE

UNIT

DATE

DRAWING NO.:

REV. A

NO	DESCRIPTION	QTY	UNIT
1	4.0mm PLASTIC OPTICAL FIBER CABLE		M