


FILE AMEND NOTE	DATE	REV.
ORIGINAL EDITION	AUG.20 .2018	B/0

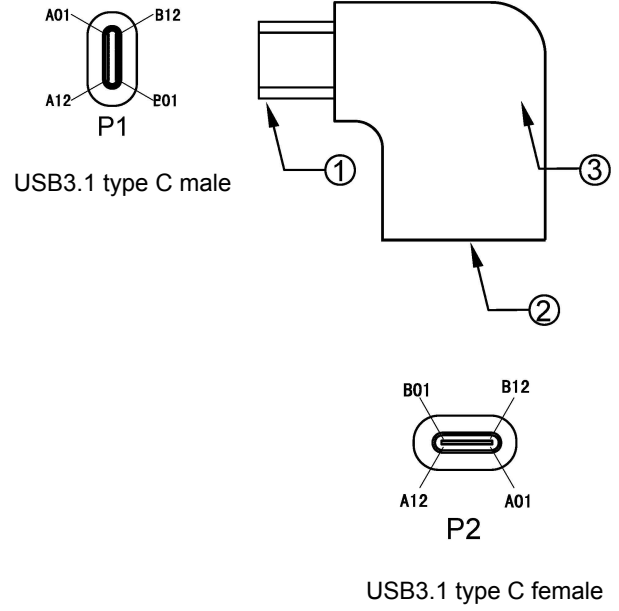

**PIN ASSIGNMENT:**

USB C TYPE M(P1)	USB C TYPE FM(P2)
A1,A12,B1,B12	A1,A12,B1,B12
A2	A2
A3	A3
A4,A9,B4,B9	A4,A9,B4,B9
A5	A5
A6	A6
A7	A7
A8	A8
A10	A10
A11	A11
B2	B2
B3	B3
B5	B5
B6	B6
B7	B7
B8	B8
B10	B10
B11	B11
SHELL	SHELL

**NOTE:**

1. Electrical properties:
  1. ALL COMPONENTS ARE RoHS COMPLIANT.
  2. 100% OPEN AND SHORT TEST.
  3. CONDUCTOR RESISTANCE: 3 OHMS
  4. INSULATION RESISTANCE: 10 MEGOHMS.
  5. HI-POT: DC200V/0.01S
2. ROHS 2.0 and REACH

**MATERIAL LIST**

No.	PART NAME	DESCRIPTION	QTY
③	OUTER MOLD	PVC CLOLR:WHITE	1
②	CONNECTOR	USB3.1 TYPE C FEMALE ,NICKEL PLATED SHELL	1
①	CONNECTOR	USB3.1 TYPE C MALE ,NICKEL PLATED SHELL	1

Name	ROLINE USB 3.1 Type C Adapter, C-C, M/F, 90° Angled, white		
DRAW No.		NAME	12.03.2996
<b>SECOMP</b>		MAPE	TOLERANCE
			X. ±1.00 X.X ±0.50
		DRAW BY	SCALE MM
		PAGE	1/1