




FRONT

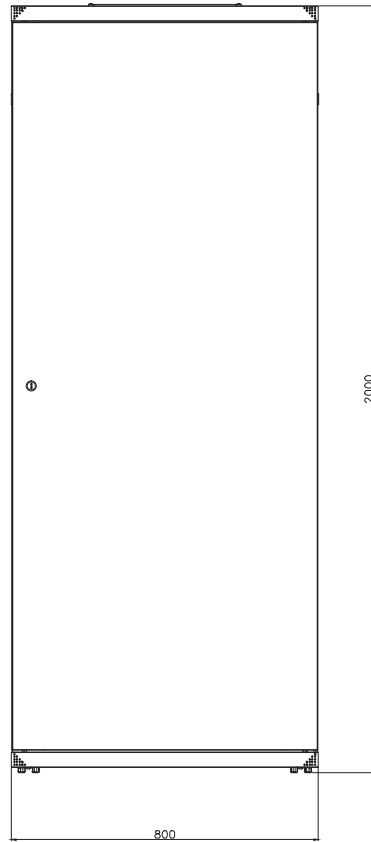


BACK

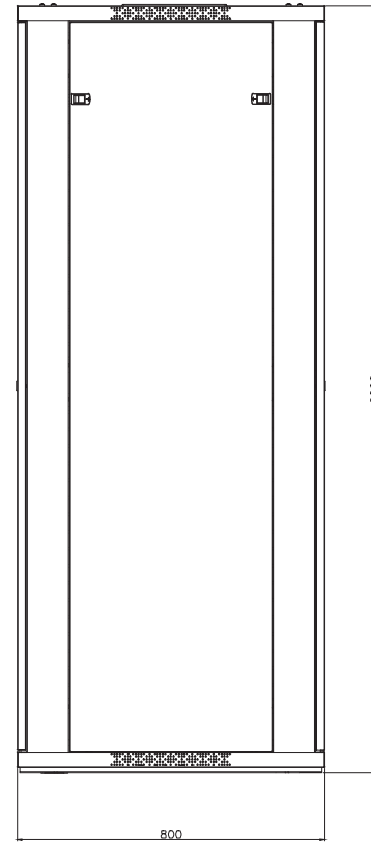


SIDE

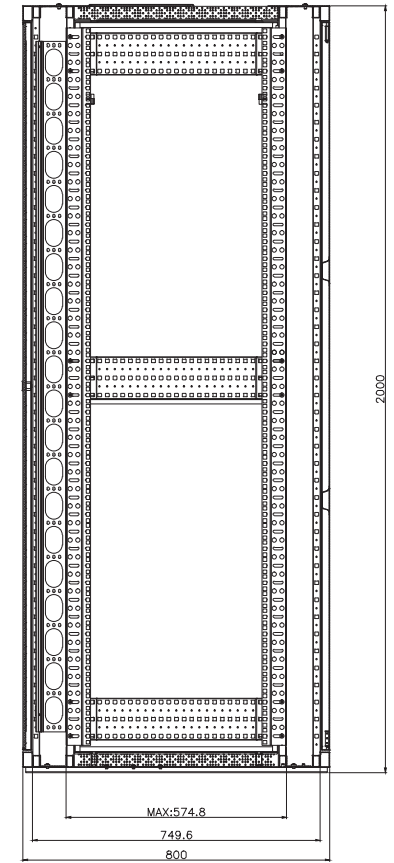

A-A



TOP



BOTTOM



**Standard:**

Comply with ANSI/EIA  
RS-310-D、IEC60297-2、DIN41494;PART1;  
DIN41494;PART7

**Material:**

SPCC Cold Rolled Steel;  
19" rails: 2.0mm, others: 1.2mm

**Loading capacity:**

Static loading: 800KG

**Feature:**

- *Flat packing and patent frame, packing time is less than 20 minutes,*
- Exquisite design with precise dimension and craftsmanship;
- Adjustable feet and heavy duty castors are available simultaneously;
- Cable entry on the top cover and bottom panel with adjustable sizes ;
- Optional installation of plinth to enable cabinets fixation, under-base cable entry/ventilation;
- Efficient and reliable cabinet connection by buying kit;
- Removable side panels to ease maintain;

**26.99.0810 VALUE Network Cabinet 42U, 2000x800x800 mm**

EAN 7611990133642