

## Tone Generator & Probe Kit


The Tone Generator is a highly practical network installation and trouble-shooting tool, which features a single or multi-tone signal, two test leads and a 4-conductor modular cable. The signal, emitted by the Tone Generator can be easily traced by the Probe, even when cables are in a bundle or hidden in a mess of punch down blocks or wall plates. The Tone Generator & Probe can be used to verify cable continuity, identify wiring faults, determine line polarity and voltage in network and modular telephone line.

The Probe is equipped with a tone amplifier and an LED indicator that detects audible frequency tones for accurate tracing and identification of wires. It's plastic conductive tip prevents shorting of expensive telecom and network equipment.

### Features

- 2 position button for single tone or dual-tone signal
- Toggle switch to control 3 modes of operation
- 3 color LED indicator display for telephone line polarity, continuity and voltage testing
- Black and red Alligator clips and standard RJ11 plug to test individual wire or RJ11 jack
- Special inductive plastic tip, which prevents accidental shorts when using near high voltage devices
- Traces and identifies wires or cable in a bundle or group without damaging cable insulation
- Adjustable volume level for various work environments
- Compatible with all existing tone generators in the market
- Power switch to prevent battery drain



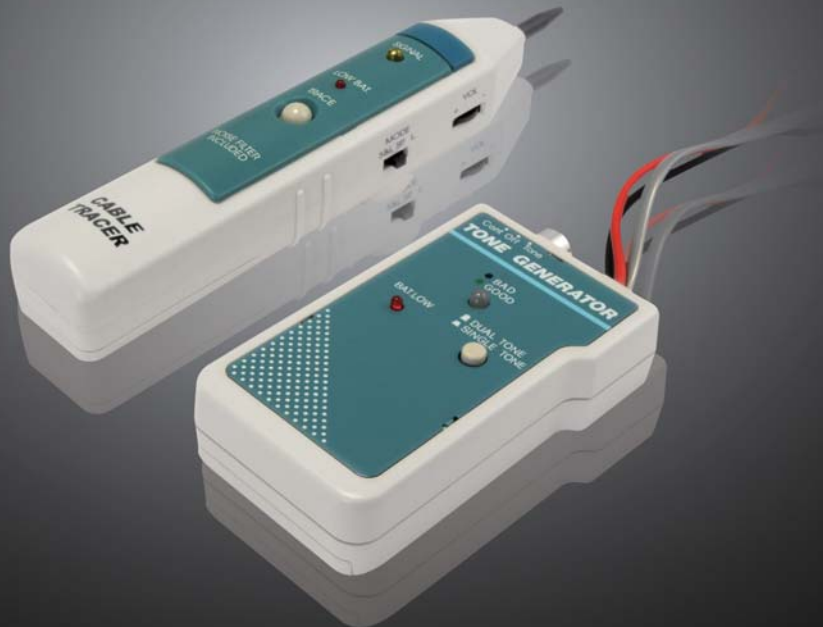

### Specifications

- Model No.: 256711A
- 1 ft. each of red and black test lead
- 1 ft. of 4 pin Modular cord and plug
- One 3 position toggle switch for operation modes control
- One 3 color LED display for line polarity, continuity and voltage test
- Power source: 9 Volt DC power battery
- Dimensions: 115 x 63 x 26mm
- Weight: 190g

### Order Information

**256711A** Tone Generator

**256712A** Probe

**256712F** Probe with filter

**256713A** Tone Generator & Probe Kit

**256713F** Tone Generator & Probe Kit (with filter)