



Datenblatt - Fiche technique - Data sheet



**21.15.2679**



ROLINE Patchkabel Kat.6 S/FTP (PiMF), Component Level, LSOH, orange, 20 m

Cordon ROLINE S/FTP(PiMF) Cat.6, LSOH, Component Level, orange, 20 m

ROLINE S/FTP Patch Cord Cat.6 Component Level, LSOH, orange, 20.0 m

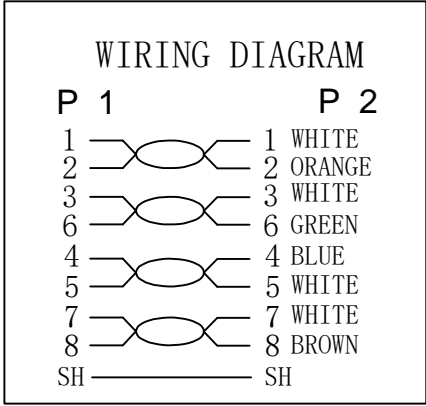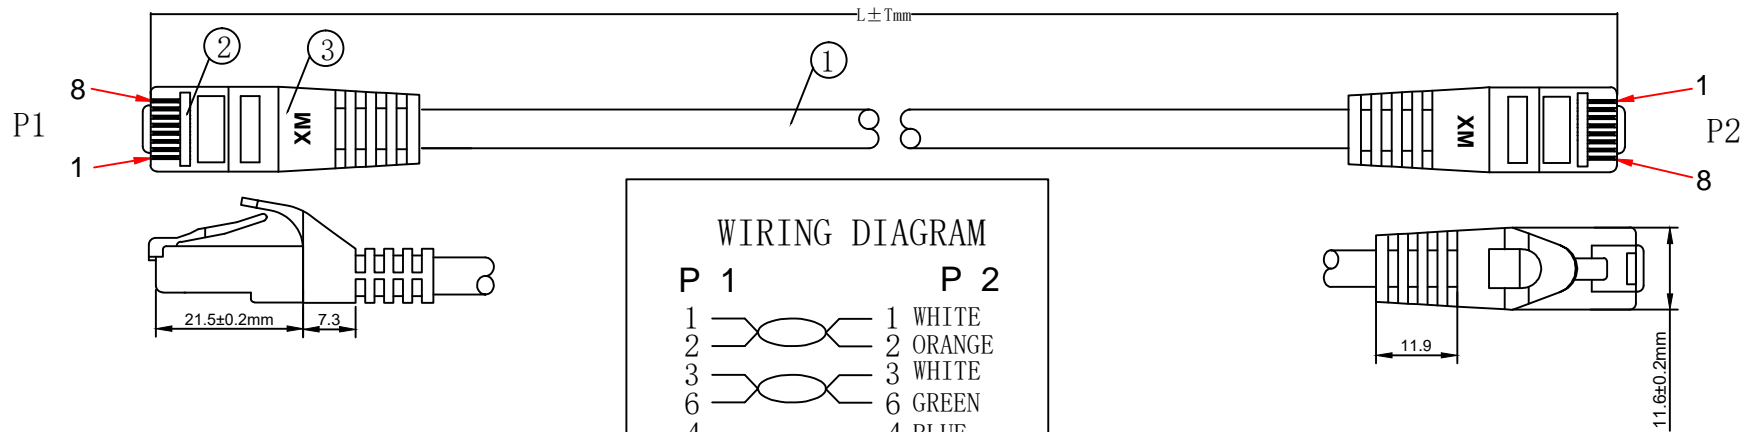

**1. ELECTRICAL TEST:**

- (1). 100% OPEN SHORT & MISS WIRE TEST;
- (2). INSULATION RESISTANCE:DC 250V 20M OHM MIN;
- (3). CONTACTOR RESISTANCE:30 OHM MAX

2. PRINTING:GHMT® roline CAT.6 S/FTP COMPONENT PATCH CORD LSZH 250MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2

- 3. 100% Component Patch cord Test PASS
- 4. Minimum bending radius:60mm

**MATERIAL LIST**

|     |                  |                                                                               |       |        |
|-----|------------------|-------------------------------------------------------------------------------|-------|--------|
| ⑥   | LABEL            | NO DRY GLUE LABEL                                                             | 1PCS  |        |
| ⑤   | MINI TIE         | PE MINI TIE (POSSESS METAL)                                                   | 2PCS  |        |
| ④   | POLYETHYLENE BAG | POLYETHYLENE BAG                                                              | 1PCS  |        |
| ③   | OVER MOLD        | 88A PVC Orange                                                                | 2PCS  |        |
| ②   | CONNECTOR        | RJ45 8P8C'S SHIELDED PIN GOLD PLATED 3u", SHELL PLATED NICKEL Transparent RED | 2PCS  |        |
| ①   | CABLE            | S/FTP CAT.6 26AWG (BC*1P+AL-FOIL)*4P+BRAID CABLE JACKET LSOH OD=6.2 ± 0.2MM   | 1PCS  |        |
| NO. | PARTS NAME       | SPECIFICATION STANDARD                                                        | QT' Y | REMARK |

| COLOUR:Orange (PANTONE:1575C) |            |               |
|-------------------------------|------------|---------------|
| ITEM NO.                      | LENGTH (L) | TOLERANCE (T) |
| 21. 15. 2958                  | 300mm      | ±10mm         |
| 21. 15. 2670                  | 500mm      | ±15mm         |
| 21. 15. 2671                  | 1000mm     | ±30mm         |
| 21. 15. 2674                  | 1500mm     | ±45mm         |
| 21. 15. 2672                  | 2000mm     | ±60mm         |
| 21. 15. 2673                  | 3000mm     | ±90mm         |
| 21. 15. 2675                  | 5000mm     | ±150mm        |
| 21. 15. 2676                  | 7500mm     | ±210mm        |
| 21. 15. 2677                  | 10000mm    | ±300mm        |
| 21. 15. 2678                  | 15000mm    | ±450mm        |
| 21. 15. 2679                  | 20000mm    | ±600mm        |

|              |                                                           |              |              |              |              |
|--------------|-----------------------------------------------------------|--------------|--------------|--------------|--------------|
| ITEM NO.     | 21. 15. 2958                                              | 21. 15. 2670 | 21. 15. 2671 | 21. 15. 2672 | 21. 15. 2673 |
| 21. 15. 2674 | 21. 15. 2675                                              | 21. 15. 2676 | 21. 15. 2677 | 21. 15. 2678 | 21. 15. 2679 |
| DESC.        | ROLINE S/FTP PatchCord CAT. 6, LSOH, Comp. Level1, Orange |              |              |              |              |

**SECOMP**

|    |     |                               |      |      |
|----|-----|-------------------------------|------|------|
|    |     |                               |      |      |
|    |     |                               |      |      |
|    |     |                               |      |      |
|    |     |                               |      |      |
| BY | CHK | REVISION RECORD MODIFICATIONS | DATE | REV. |

2016-10-20 A