



Datenblatt - Fiche technique - Data sheet



21.99.0301



VALUE S/FTP-Patchkabel konf. Kat. 5e, grau, 1,0 m

Cordon VALUE Cat.5e S/FTP confectionné, gris, 1,0 m

VALUE S/FTP Patch Cord Cat.5e, grey, 1.0 m

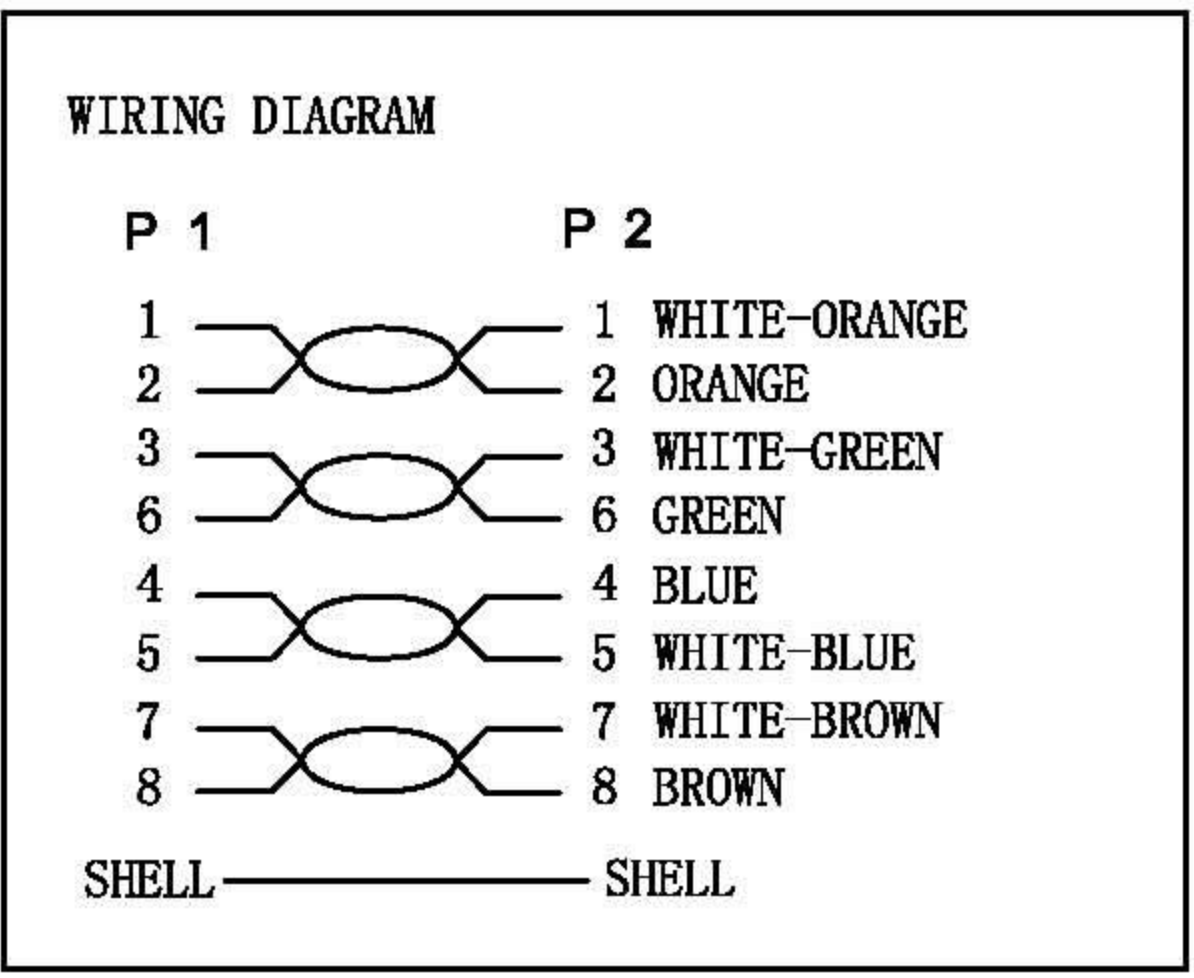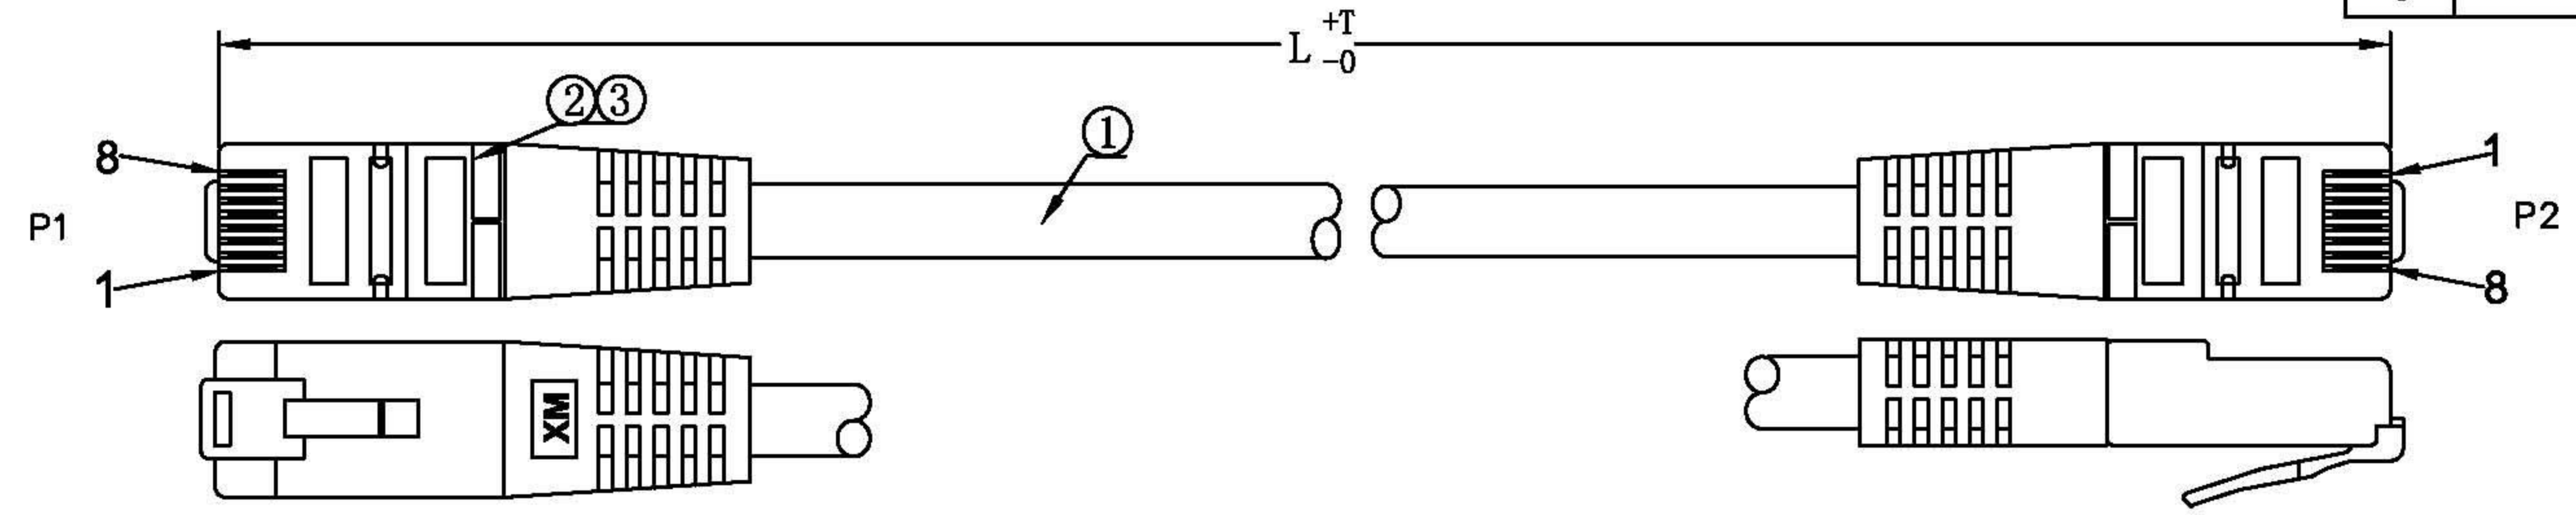

| ITEM NO. | LENGTH | XM |
|--------------|--------|------|
| 21. 99. 0300 | 0.5M | 0.5M |
| 21. 99. 0301 | 1M | 1M |
| 21. 99. 0302 | 2M | 2M |
| 21. 99. 0303 | 3M | 3M |
| 21. 99. 0305 | 5M | 5M |
| 21. 99. 0307 | 7M | 7M |
| 21. 99. 0310 | 10M | 10M |
| 21. 99. 0315 | 15M | 15M |
| 21. 99. 0320 | 20M | 20M |

NOTE:

- 100% OPEN SHORT, MISS WIRE TEST
- PRINT BLACK WORD:
SFTP CAT. 5E 26AWG×4P PATCH ISO/IEC 11801 & EN 50173 VERIFIED
- REACH and ROHS COMPLIANT
- minimum of the bending radius is 40mm (suitable for all meters)

Rotronic Co., Ltd.

VALUE S/FTP Patch Cord Cat. 5e, grey

| | | | | | |
|----|-----|------------|------|----------|---------------|
| | | | | ITEM NO | SEE THE CHART |
| | | | | UNIT | MM |
| BY | CHK | DATE | REV. | DRAWN BY | CHECK BY |
| | | 2011-10-25 | A | | |
| | | | | APPO BY | DATE |
| | | | | | 2011-10-25 |

MATERIAL LIST

| | | | | |
|-----|------------|--|-------|------------|
| ③ | OVER MOLD | PVC COLOR: (Pantone 420C) | 2 | |
| ② | CONNECTOR | RJ45 8P8C SHIELDED, THE PIN GOLD PLATED 3U" | 2 | |
| ① | CABLE | SFTP CAT. 5E 26AWG(7/0.16COPPER CLAD ALUMINUM)*4PAIRS+MYLAR+E(7/0.16COPPER CLAD ALUMINUM)+AL-FOIL+B(0.12/4/16)AL-MG CABLE JACKET:PVC/(Pantone 420C) OD=5.7±0.2MM | 1 | |
| NO. | PARTS NAME | SPECIFICATION STANDARD | QT' Y | REMARK |
| | | NEW | | 2011-10-25 |
| BY | CHK | REVISION RECORD MODIFICATION | DATE | REV. |