
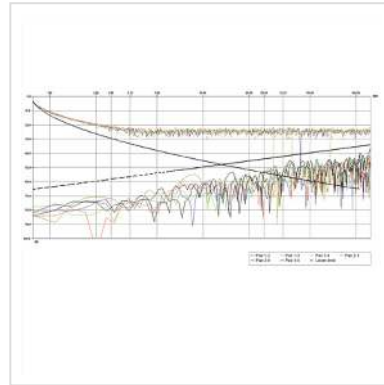


ROLINE FTP Cable Cat.5e (Class D), Stranded Wire, 300 m

Product No.	21.15.0121
Manufacturer	ROLINE
Manufacturer No.	21.15.0121
EAN (single piece)	7611990135905

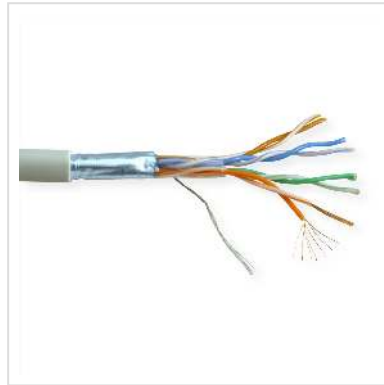

Cat.5e
Class D

- Structured building wiring
- Impedance: 100 Ohm
- Colour: Grey
- Construction 21.15.0121: 8 lines, copper, stranded wire AWG26, screening: alu-laminated foil
- Diagram: attenuation/near end crosstalk

For a structured cabling system we recommend to use the following components:

ROLINE Cat.5e FTP Cable, Solid Wire, AWG24: 21.15.0009 (100 m), 21.15.0010 (300 m)

ROLINE Cat.5e Flush/Surface Mount Wall Jack, shielded: 25.16.8487 (white), 25.16.8486 (ivory)/25.16.8387 (white), 25.16.8386 (ivory)

ROLINE Cat.5e 19" Patch Panel, 24 Ports, shielded: 26.11.0329 (light grey), 26.11.0328 (black)

ROLINE Cat.5e FTP Patch Cord, grey, 5 m: 21.15.0105

Our in-house laboratory has tested this cable-plug combination, in a Channel of 100 meters, in compliance with Class D specifications.

Technical specifications

Manufacturer	ROLINE
Product group	Twisted Pair Cable
Product type	Raw cable Cat.5e
Colour	grey
Length	300 m
Contents	300 m
Shield type	FTP
Transfer quality	Cat5e / Class D
Impedance	100 Ohm
Quantity of wires	8
Conductor cross section (AWG)	AWG 26
Conductor type	Wire
Cable LSOH	no
Material (external cable mantle)	PVC
Weight	9873.8 g
Height of packaging (single piece)	300 mm
Width of packaging (single piece)	440 mm
Depth of packaging (single piece)	450 mm
Package weight (single piece)	10.329 kg