

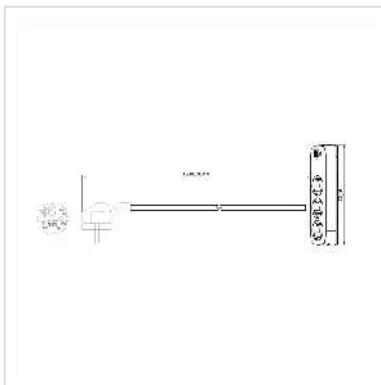


# VALUE Power Strip, 3-way, with 3x USB (1x C + 2x A) and table clamp, 1.5 m

<b>Product No.</b>	19.99.1034
<b>Manufacturer</b>	VALUE
<b>Manufacturer No.</b>	19.99.1034
<b>EAN (single piece)</b>	7630049639096

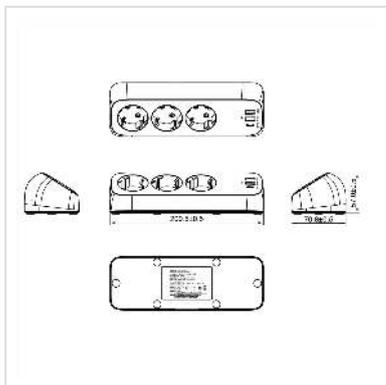

## 3-way Power Strip with plastic housing, equipped with 3x German Type (CEE 7/3) Sockets and 3x USB Charging Ports (1x USB-C and 2x USB-A) and table clamp.

- 3-way Power Strip with plastic housing, equipped with 3x German Type (CEE 7/3) Sockets and 3x USB Charging Ports (1x USB-C and 2x USB-A)
- Comes with table clamp
- German Type (CEE 7/3) Sockets are 45° rotated
- CEE 7/3 total socket output: AC 250V 16A max. 3680W
- USB-C Output

Single port output: max. 30W (5V/3A, 9V/3A, 15V/2A)

Multiple ports output: max. 20W (5V/3A, 9V/2.22A)

- USB-A1, USB-A2 output: total 12W (5V/2.4A)
- Over current, overload, over temperature and short circuit protection with auto-recovery
- 1.5m supply cable with low-profile angled safety plug and latch for easy unplugging
- Colour: white

### Technical specifications

Manufacturer VALUE

Product group Power Bars

Product type	Power strip
Colour	white
Length	1.5 m
Scope of delivery	Power strip and table clamp
Function	Power Strip with 3x German Type (CEE 7/3) Sockets and 3x USB Charging Ports (1x USB-C and 2x USB-A)
Mounting form	Desktop
Max. capacitance	3680 W
Max. voltage	250V AC
ON/OFF Switch	yes
Number of socket pots	3
Quantity of outputs/angles	3 / 45°
Output alignment	row
Socket type	3P. German, CEE 7/3, Type-F
USB Charger	yes
Number of USB connections	3
Material (casing)	Plastic
Colour (Design profile)	white
Connection cable	H05VV-F 3G 1.5mm <sup>2</sup> 1.5m
Colour (Cable)	white
Connector plug	German Type Plug CEE 7/7
Plug type	3P. German, CEE 7/7, Type-E/F
With enhanced contact protection	yes
Regional use	Germany, Austria, Netherlands
Mains connection	Protective contact plug, Type-E/F
Operating temperature min.	0 °C

Operating temperature max.	25 °C
----------------------------	-------

Storage temperature min.	-20 °C
--------------------------	--------

Storage temperature max.	85 °C
--------------------------	-------

Height	57 mm
--------	-------

Width	200.5 mm
-------	----------

Depth	70.8 mm
-------	---------

Weight	480 g
--------	-------

Height of packaging (single piece)	100 mm
------------------------------------	--------

Width of packaging (single piece)	150 mm
-----------------------------------	--------

Depth of packaging (single piece)	210 mm
-----------------------------------	--------

Package weight (single piece)	0.8 kg
-------------------------------	--------