


1 2 3 4 5 6

A


SCALE 8/1

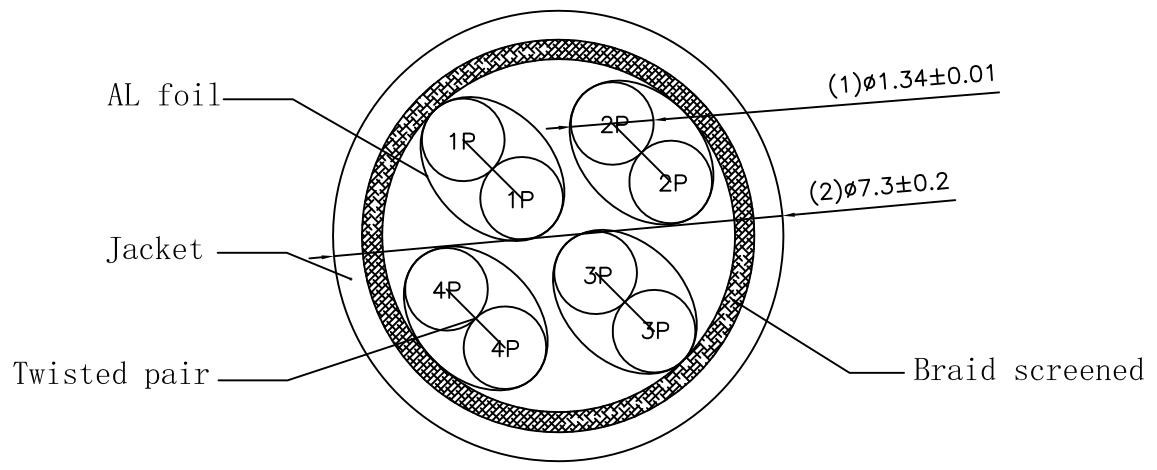

A

B

SCALE 1/2

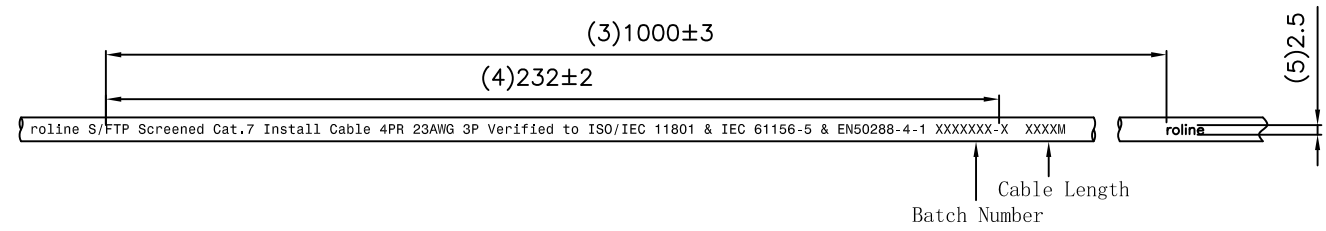

B

C

SCALE 1/1

roline S/FTP Screened Cat.7 Install Cable 4PR 23AWG 3P Verified to ISO/IEC 11801 & IEC 61156-5 & EN50288-4-1 XXXXXX-X XXXXM

C

D

Specifications :

- Wiring : T568B
- Copper conductor : 23AWG
- XXXXXXX-X : Batch number
- XXXXM : Cable length
- Cable printing : blue printing
- Jacket material : PVC
- Printing meter number on the end of each test. 0001, 0002, 0003.....9999
- With ROHS and REACH compliant.
- CPR CLASS Eca
- Operating temperature : -20. C ~ +70. C

D

Bending radius(4x cable OD)	NVP	Item NO	Description	Color
30mm	80.0%	• 21.15.0003	ROLINE S/FTP (PIMF) Cable Cat.7, Solid Wire, 300m	Grey
30mm	80.0%	• 21.15.0001	ROLINE S/FTP (PIMF) Cable Cat.7, Solid Wire, 100m	Grey

GENERAL TOLERANCE OF DIMENSIONS x.xxx ±0.005 x.xx ±0.05 x.x ±0.1	DRAWING	18.FEB.2022	SP	SECOMP
	CHECK	18.FEB.2022	CMD	
	APPROVAL	18.FEB.2022	YUAN	
		DATE	NAME	
SCALE	1/1 (A4)	UNIT	mm	
DRAWING NO.		Roline S/FTP 23AWG Solid C7 CABLE PVC(E01)		
DRAWING CLASSIFICATION		E	SHEET	1 OF 1

1 2 3 4 5 6