


# ROLINE ProSecure II 1500 - Online UPS

<b>Product No.</b>	19.40.1083
<b>Manufacturer</b>	ROLINE
<b>Manufacturer No.</b>	19.40.1083
<b>EAN (single piece)</b>	7611990154814

**roline**  
Designed for Professionals

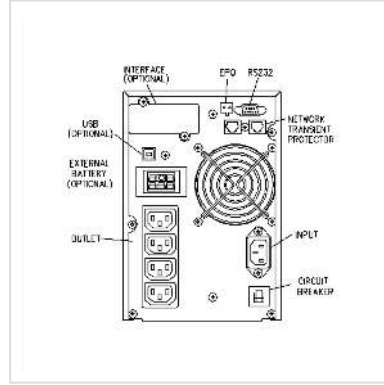

**The ROLINE ProSecure Series - for optimum power protection is a truly state of the art online double conversion UPS, ideal for all essential computer systems and servers. Protects against: power failure, power sag, power surge, under voltage, over voltage, switch transient, line noise, frequency variation, harmonic distortion.**

Product features:

- Cold start function (DC power on)
- Lightning and surge protection
- Battery replacement warning
- Emergency Power Off function
- Battery remain time display
- LCD display front panel
- Power factor correction
- Support USB communication
- Multiple language LCD display
- On line output voltage selected
- Hot swappable battery by user
- True on-line technology provides all power protection
- Pure sine-wave output with less than 3% THD
- Fully digitized microprocessor controlled
- Short Circuit and overload protection
- Advanced battery management (ABM)
  
- Automatic battery charge in UPS off mode
- Automatic diagnostics & battery check

- RS-232 communication port with monitoring software
- Network/fax/modem surge protection
- Extended back up time with battery pack
- Load segmentation receptacles controllable
- High efficiency mode selectable
- Fan speed auto control when loads varies
- UPS Management Software : Windows NT/ 2k / XP / 7 / 8 /Server 2003 / 2008 / 2012 x86/x64, MAC OS X (Intel) 10.6.x, 10.7.x, 10.8.x Mountain Lion, 10.9.x MavericksMAC OS, LINUX
- Contents: UPS, cable set, UPS management software

### Technical specifications

Manufacturer	ROLINE
Product group	UPS
Product type	UPS Online
Colour	grey
Scope of delivery	UPS, Software, Cable Set
Classification (IEC 62040-3)	VFI-SS-111
UPS technology	Online
Power class	1000 ... 1900 VA
Output (VA/W)	1500 / 1050
Efficiency	95 %
Backup time	5 min
Backup time full/half-load	5 / 9 min
Dimensions (HxWxD)	235 x 155 x 410 mm
Mounting form	Tower
Voltage (input)	160-230V
Voltage (output)	230 V
Output voltage regulation	± 2%
Frequency	50Hz ± 3%
Connector type (input)	cold connector IEC 320 C14

Outputs	4
Connector type (output)	4x cold connector IEC 320 C13
Phase in/output	230V/230V / 50Hz
Over current protection	EMI,- RFI-Filter
Max. quantity of delay expansion units	2
Delay expansion unit	2
Slots for adapter card	1
Slot for adapter card	1
Interface	RS232, USB
RS-232 Interface	yes
USB 2.0 Interface	yes
Hot swap batteries	Yes, front side
Bypass	Automatic + manual
Additional over current protector	no
Activity	Display
Activity LED	5
Activity Display	LCD
incl.Management Software	Windows
Internal cooling	Active, fan
Ambient temperature	0 - 40 °C
Operating temperature min.	0 °C
Operating temperature max.	40 °C
Height	235 mm
Width	155 mm
Depth	410 mm
Weight	20 kg

Height of packaging (single piece)	350 mm
Width of packaging (single piece)	290 mm
Depth of packaging (single piece)	550 mm
Package weight (single piece)	18.614 kg

### Back up time

Power rating (VA / W)	with 0 / 1 / 2 Battery pack (minutes), according to manufacturer
1500/1050	5 / 13 / 28
1350/945	6 / 16 / 34
1200/840	7 / 20 / 40
1050/735	9 / 25 / 48
900/630	11 / 30 / 56
750/525	14 / 37 / 66
600/420	19 / 45 / 85
450/315	27 / 60 / 140
300/210	40 / 100 / 220
150/105	60 / 270 / 400